VLR 12/7/5
NRHP 2/10/6

(Rev. 10-90)
NPS Form 10-900

OMB No. 1024-0018

United States Department of the Interior
National Park Service

NATIONAL REGISTER OF HISTORIC PLACES REGISTRATION FORM

This form is for use in nominating or requesting determinations for individual properties and districts. See instructions in How to Complete the National Register of Historic Places Registration Form (National Register Bulletin 16A). Complete each item by marking "x" in the appropriate box or by entering the information requested. If any item does not apply to the property being documented, enter "N/A" for "not applicable." For functions, architectural classification, materials, and areas of significance, enter only categories and subcategories from the instructions. Place additional entries and narrative items on continuation sheets (NPS Form 10-900a). Use a typewriter, word processor, or computer, to complete all items.

1. Name of Property

historic name Park Place Historic District DHR Number 122-5087

other names/site number Park Place, Kensington, Old Dominion Place, Virginia Place

2. Location

street & number Roughly bound by Hampton Blvd, 23rd Street, Granby Street and 38th Street ☐ not for publication
city or town Norfolk ☐ vicinity
state Virginia code VA county Norfolk code 710 Zip 23504, 23508, 23517

3. State/Federal Agency Certification

As the designated authority under the National Historic Preservation Act of 1986, as amended, I hereby certify that this ☒ nomination ☐ request for determination of eligibility meets the documentation standards for registering properties in the National Register of Historic Places and meets the procedural and professional requirements set forth in 36 CFR Part 60. In my opinion, the property ☒ meets ☐ does not meet the National Register Criteria. I recommend that this property be considered significant ☐ nationally ☐ statewide ☒ locally. (☐ See continuation sheet for additional comments.)

Signature of certifying official Date 12/21/05

Virginia Department of Historic Resources
State or Federal agency and bureau

Signature of commenting or other official Date

State or Federal agency and bureau

4. National Park Service Certification

I, hereby certify that this property is:
____ entered in the National Register
____ See continuation sheet.
____ determined eligible for the National Register
___ See continuation sheet.
___ determined not eligible for the National Register
___ removed from the National Register
___ other (explain): _____

Signature of Keeper _____

Date of Action _____

5. Classification

Ownership of Property (Check as many boxes as apply)

X private
X public—local
___ public—state
___ public—Federal

Category of Property (Check only one box)

___ building (s)
X district
___ site
___ structure
___ object

Number of Resources within Property

Contributing	Noncontributing	
1525	321	buildings
2	0	sites
5	12	structures
0	0	objects
1532	333	Total

Number of contributing resources previously listed in the National Register 0

Name of related multiple property listing (Enter "N/A" if property is not part of a multiple property listing.)

N/A

6. Function or Use

Historic Functions (Enter categories from instructions)

Cat:	Sub:
DOMESTIC	single dwelling
DOMESTIC	multiple dwelling
DOMESTIC	secondary structure
COMMERCE/TRADE	business
COMMERCE/TRADE	organizational
COMMERCE/TRADE	financial institution
COMMERCE/TRADE	specialty store
COMMERCE/TRADE	department store
COMMERCE/TRADE	warehouse

Current Functions (Enter categories from instructions)

Cat:	Sub:
DOMESTIC	single dwelling
DOMESTIC	multiple dwelling
DOMESTIC	secondary structure
COMMERCE/TRADE	business
COMMERCE/TRADE	organizational
COMMERCE/TRADE	specialty store
COMMERCE/TRADE	restaurant
COMMERCE/TRADE	warehouse
SOCIAL	meeting hall

7. Description

Architectural Classification (Enter categories from instructions)

LATE VICTORIAN	
LATE VICTORIAN:	Queen Anne
LATE VICTORIAN:	Shingle Style
LATE 19TH AND 20TH CENTURY REVIVALS	
LATE 19TH AND 20TH CENTURY REVIVALS:	Classical Revival
LATE 19TH AND 20TH CENTURY REVIVALS:	Colonial Revival
LATE 19TH AND 20TH CENTURY REVIVALS:	Late Gothic Revival
LATE 19TH AND 20TH CENTURY REVIVALS:	Tudor Revival
LATE 19TH AND 20TH CENTURY AMERICAN MOVEMENTS	
LATE 19TH AND 20TH CENTURY AMERICAN MOVEMENTS:	Bungalow/Craftsman
MODERN MOVEMENT	
MODERN MOVEMENT: Art Deco	
MODERN MOVEMENT: Moderne	

Materials (Enter categories from instructions)

Foundation	BRICK, CONCRETE
Roof	METAL, ASPHALT, SLATE, ASBESTOS
Walls	BRICK, WOOD, VINLY, ALUMINUM
Other	

Narrative Description (Describe the historic and current condition of the property on one or more continuation sheets.)

8. Statement of Significance

Applicable National Register Criteria (Mark "x" in one or more boxes for the criteria qualifying the property for National Register listing)

X A Property is associated with events that have made a significant contribution to the broad patterns of our history.

___ B Property is associated with the lives of persons significant in our past.

X C Property embodies the distinctive characteristics of a type, period, or method of construction or represents the work of a master, or possesses high artistic values, or represents a significant and distinguishable entity whose components lack individual distinction.

___ D Property has yielded, or is likely to yield information important in prehistory or history.

Criteria Considerations (Mark "X" in all the boxes that apply.)

____ A owned by a religious institution or used for religious purposes.

____ B removed from its original location.

____ C a birthplace or a grave.

____ D a cemetery.

____ E a reconstructed building, object or structure.

____ F a commemorative property.

____ G less than 50 years of age or achieved significance within the past 50 years.

Areas of Significance (Enter categories from instructions)

Architecture

Community Planning and Development

Period of Significance 1884-1955

Significant Dates 1884—laying of railroad tracts

1890—Old Dominion Place development plan

1896—Park Place development plan

1898—Kensington development plans

1899—Virginia Place development plans

Significant Person (Complete if Criterion B is marked above)

N/A

Cultural Affiliation N/A

Architect/Builder A. O. Ferebee—architect

Vance Hebard—architect

Rudolph, Cooke and Van Leeuwen—architect

George Washington Kramer—architect

Benjamin Mitchell—architect

William H. Nicklas—architect

W. W. Marshall—builder

E. L. Meyer—builder

X **See Continuation Sheet for other Architects**

Narrative Statement of Significance (Explain the significance of the property on one or more continuation sheets.)

9. Major Bibliographical References

Bibliography

(Cite the books, articles, and other sources used in preparing this form on one or more continuation sheets.)

Previous documentation on file (NPS)

____ preliminary determination of individual listing (36 CFR 67) has been requested.

____ previously listed in the National Register

____ previously determined eligible by the National Register

____ designated a National Historic Landmark

____ recorded by Historic American Buildings Survey # _____

____ recorded by Historic American Engineering Record # _____

Primary Location of Additional Data

X State Historic Preservation Office.

____ Other State agency

____ Federal agency

____ Local government

____ University

____ Other

Name of repository: _____

10. Geographical Data

Acreage of Property 347 acres

UTM References (Place additional UTM references on a continuation sheet)

	Zone	Easting	Northing		Zone	Easting	Northing
A	18	383938	4082275	C	18	385745	4082401
B	18	383989	4082314	D	18	385755	4081989

X See continuation sheet.

Verbal Boundary Description (Describe the boundaries of the property on a continuation sheet.)

Boundary Justification (Explain why the boundaries were selected on a continuation sheet.)

11. Form Prepared By

name/title: Kimble A. David, Architectural Historian

Organization _____ date: 4 August 2005

street & number P. O. Box 7638 telephone 757/623.3456

city or town: Norfolk state: VA zip code: 23509

Additional Documentation

Submit the following items with the completed form:

Continuation Sheets

Maps

A USGS map (7.5 or 15 minute series) indicating the property's location.

A sketch map for historic districts and properties having large acreage or numerous resources.

Photographs

Representative black and white photographs of the property.

Additional items (Check with the SHPO or FPO for any additional items)

Property Owner

(Complete this item at the request of the SHPO or FPO.)

name _____

street & number_____ telephone_____

city or town_____ state_____ zip code _____

==========

Paperwork Reduction Act Statement: This information is being collected for applications to the National Register of Historic Places to nominate properties for listing or determine eligibility for listing, to list properties, and to amend existing listings. Response to this request is required to obtain a benefit in accordance with the National Historic Preservation Act, as amended (16 U.S.C. 470 et seq.).

Estimated Burden Statement: Public reporting burden for this form is estimated to average 18.1 hours per response including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding this burden estimate or any aspect of this form to the Chief, Administrative Services Division, National Park Service, P.0. Box 37127, Washington, DC 20013-7127; and the Office of Management and Budget, Paperwork Reductions Project (1024-0018), Washington, DC 20503.

Historic Functions (Enter categories from instructions)

Cat:	Sub:
SOCIAL	meeting hall
GOVERNMENT	public works
RELIGION	religious facility
RELIGION	church school
RELIGION	church-related residence
RECREATION AND CULTURE	theater
RECREATION AND CULTURE	sports facility
RECREATION AND CULTURE	outdoor recreation
INDUSTRY/PROCESSING/EXTRACTION	manufacturing facility
INDUSTRY/PROCESSING/EXTRACTION	industrial storage
HEALTH CARE	sanitarium
TRANSPORTATION	rail-related

Current Functions (Enter categories from instructions)

Cat.	
GOVERNMENT	public works
RELIGION	religious facility
RELIGION	church school
RECREATION AND CULTURE	outdoor recreation
INDUSTRY/PROCESSING/EXTRACTION	manufacturing facility
INDUSTRY/PROCESSING/EXTRACTION	industrial storage
HEALTH CARE	sanitarium
TRANSPORTATION	rail-related
LANDSCAPE	park
VACANT/NOT IN USE	

Architect/Builder (con't):
Elias A. Goehring—builder
J. H. Pierce—builder
J. T. Hoy Co. —builder
B. L. Michaels—builder
A. M. Johnson—builder
McLaren Brothers—builder
Hoy Wilbur and Co. —builder
C. E. Hearing—builder
C. L. Sherwood—builder
J. N. W. Pearle—builder
A. M. Johnson—builder
Warell and Williams—builder
Morris Abbott and Company—builder
Wilkes and McCoy—builder
James and Jarvis—builder
Cluman Brothers—builder
J. W. Wells—builder
C. H. Sawbury—builder
R. S. Maling—builder
R. S. Maling—builder
D. Brown—builder
Gregory and Williams—builder
J. W. Detrick—builder
L. R. Heath of Bult and Heath—builder
Goehring and Tommason—builder
C. H. Overmeyer
J. E. Chubb—builder
William Mains—builder
Russ and Bouvers—builder
B. L. Nichols—builder
Gord and Joynes—builder
R. M. Price—builder
O. E. D. Barron—builder
Stalhing and Wilkes—builder
A. J. Reynolds—builder

G. H. Merts—builder
R. M. Prise—builder
N. Y. Bailey—builder
J. M. Bunting—builder
H. L. Goodson—builder
Salmon and Capps—builder
J. W. Dozier—builder
T. P. Roberts—builder
Williams and Company—builder
W. H. Saunders—builder
Rife and Fitch—builder
C. F. Overmeyer—builder
Barclay and Lawinsky—builder
E. A. Gorham—builder
L. M. McCloud—builder
R. S. Molding—builder
George H. Murt—builder
Dear and Fotty—builder
H. W. Willard—builder
W. W. Powell—builder
J. N. Harris—builder
W. J. and Schwartz—builder
F. E. Moore—builder
McCunnon Brothers—builder
J.S. Rives—builder
C. E. Ferring—builder
A. M. Johnston—builder
Turpin Brothers—builder
B. B. Carter—builder
W. J. Mason and Company—builder
Dean and Tottery—builder
Stallings and Atkinson—builder
W. F. and J.T. Sawyer—builder
Barber and Seay—builder
A. Hall—builder
Goode and James—builder

Summary Architectural Description:

The Park Place Historic District is located in the city of Norfolk, Virginia and is approximately five miles north of the city center. The district is an example of streetcar suburban development in Norfolk during the late 19th and early 20th centuries. The period of significance of the Historic District is 1884 to 1955, which reflects its initial development through its major building period to the end of major building construction. The district plan is a grid following previously grid planned developments to the south. The buildings within the district comprise primarily industrial, residential, commercial and religious types. The south and west ends of the district are occupied by industrial buildings types, while most of the district is occupied by residential buildings. Commerce is interspersed within the industrial areas of the district as well as along major thoroughfares, such as 35th Street, Granby Street and Monticello Avenue, which corresponds to the location of the former streetcar lines. Religious buildings are additionally interspersed within the residential and commercial areas of the district. The styles of buildings within the district represent popular styles of the late 19th and early to mid-20th centuries. Forms found within the district include Queen Anne, Colonial Revival, Craftsman, and Modern Movement styles. The district is comprised of 1532 contributing resources and 333 non-contributing resources, and encompasses approximately 347 acres. The Park Place Historic District is significant under Criteria A and C for its association with Norfolk's suburban development and for its architectural character and integrity from the period 1884 to 1955.

Architectural Description:

The Park Place Historic District is located in the city of Norfolk, Virginia approximately five miles north of the city's center. The district is sited west of Norfolk's first city park and north of the 1884 Norfolk and Western, currently Norfolk Southern, railroad spur to the Lambert's Point docks. The area is flat and is divided by roadways forming a grid pattern. Streets oriented east-west are primarily numbered and those oriented north-south are named. Dividing the north and south portions of the Historic District is an east-west oriented roadway, Lamberts Point Road, which was an early road leading from the Norfolk city center, located south of the district, to the Elizabeth River near the Lamberts Point docks, west of the district. The roadways to the north of Lamberts Point Road are oriented directly east-west, while the roadways to the south of Lamberts Point Road are oriented more northwest-southeast. The roadways to the south follow the grid pattern of the neighborhoods established earlier and south of the Park Place Historic District. The roadways in the north portion are oriented to the major roadways leading north-south.

The Historic District comprises four major developments dating from the period 1890 to 1899, which occupy four quadrants of the area. Virginia Place is located on the northeast corner, Park Place is located on the southeast corner, Kensington is located on the northwest corner and Old Dominion Place is situated on the southwest corner. There are other smaller areas within the boundaries that are portions of other developments outside of the Park Place Historic District boundaries.

The streets are paved with asphalt and some feature original granite curbing. Most granite curbing has been replaced with poured concrete curbing. The streets oriented east-west are narrower than those providing north-south through traffic such as Hampton Boulevard, Colley Avenue, Colonial Avenue, Llewelyn Avenue and Granby Street north of West 32nd Street. Colley Avenue features a landscaped median from West 25th to West 28th Streets planted with live oaks. The residential areas have had additional plantings of crepe myrtles along the streets, which were added in the 1930s.

The Historic District is divided into two distinct areas of development: industrial and residential. The industrial area is situated at the south and west ends of the Historic District near the railroad tracks marking the south and west boundaries. The residential area comprises a majority of the Historic District and is marked by commerce near original trolley lines that were situated along Granby Street and 35th Street. The industrial buildings are primarily low scale of one to three stories. Houses and commercial buildings are primarily one to two stories and are of similar scale and massing. The construction periods of each area were defined by the availability of lots for sale. Most of the early development is seen in the southern part of the Historic District and comprises residential building.

The industrial buildings are sited on the street with little open space. Most open space associated with the industrial buildings is in the forms of loading docks and spaces for the loading of materials. In some cases these areas are relegated to the rear of the buildings away from its street frontage. Some buildings constructed after the period of significance are set back farther from the street to allow for parking. The siting of the residential buildings is defined by type of building. Larger scale apartment buildings are sited on the street, while those that are two to three stories maintain the setbacks of the single-family housing. The single-family housing setbacks are twenty-five feet from the street allowing for sidewalks and a greenspace between the sidewalks and the street, and between the building and sidewalk.

Lot size for each building varies depending on its function. Single-family houses are typically found on twenty-five to fifty feet wide lots by one-hundred feet deep. Larger houses are sited on larger lots while more modest houses are sited on narrower lots usually found within the numbered street blocks oriented east-west. Churches, large-scale apartment buildings, and industrial buildings are sited on

larger lots that occupy one-fourth to one-half of a block. Lot size varies to accommodate the space need for the building's function.

The area is flat and features buildings of similar scale and massing. The industrial areas to the south and west feature buildings of one and two stories. Interspersed are a few three-story buildings. These larger buildings maintain the scale and massing of the other industrial buildings within the district. Most industrial buildings have a large footprint and occupy most of the block on which they lie. The residential area features single- and multiple-family dwellings of primarily one- and two-story buildings. Some apartment buildings are three and four stories. All residential buildings have a similar scale and massing forming a cohesive late-19th- and early-20th-century character. Buildings added in the 1940s and 1950s are primarily clustered within blocks and are sited on slightly larger lots. The grid street pattern is maintained within these areas as well as setbacks established by the late 19th and early 20th century buildings.

The character of the Historic District's building sitings is maintained throughout the 20th century except for the addition of mostly two-story apartment buildings. These are sited at the back portion of the lot and are fronted by paved parking lots. Considered non-contributing, these buildings do not maintain the character of the Historic District. Vacant lots within the district were created during the redevelopment years of the 1970s to the present and also do not contribute to the character of the Historic District.

The railroad line marks the south boundary of the Historic District. It is also the earliest resource within the district and denotes the commencement of development in this area. Associated with the railroad line is a railroad underpass at Monticello Avenue. The underpass, constructed in 1951, was the second underpass to be constructed under the spur line. They are both contributing structures to the Park Place Historic District.

The area immediately to the north of the railroad line is defined by low-scale brick and concrete block warehouses dating to the turn of the 20th century. They are primarily one-story, brick construction with flat roofs. The most notable are Batchelder and Collins (1904) at 2301 Granby Street, J. W. Gamage and Son (1910) at 2308 Granby Street, and the warehouse at 426 West 23rd Street (1935). The warehouses on Granby Street date to the turn of the 20th century and have classical details such as corbelled brick cornices. The warehouse at 426 West 23rd Street is Art Deco in design with a pavilioned entrance featuring streamlined entrance details.

Other larger scale industrial buildings are situated at the west boundary of the Historic District. The National Linen Service (1941) at 2400 Hampton Boulevard, Nolde Brothers Inc. (1940) at 2500 Hampton Boulevard and Sanitary Linen Service (1928) at 2514 Hampton Boulevard date to the period between 1928 and 1941. National Linen Service features Art Deco details such as a rounded corner and glass block windows. Sanitary Linen Service is much more simplified exemplifying the utilitarian-style of industrial building construction. Nolde Brothers Inc. features Art Deco details such as a pavilioned entrance, circular windows, glazed brick veneer, and applied stone veneer. The most striking features on this building are the company's name, "NOLDE BROTHERS INC", constructed in glazed brick and resting atop the façade parapet and south elevation parapet walls, which fronts the streets.

Other industrial buildings of note within the district are the manufacturing facility at 435 West 25th Street (1926) and the Best Repair Company (1938) at 2406 Debree Avenue. The building at 435 West 25th uses a simplified form and is rectangular in plan. The building is brick with brick banding and stack-bond brick marking the bays and stories of the north and west elevations. The walls are stuccoed between the brick framing and punctuated by grouped windows. The Best Repair Company is Art Deco in style and has a pronounced appearance among the more rectilinear buildings within the industrial area. The building has a stepped parapet that wraps its side elevations, streamlined steel canopy, circular windows, and ribbon windows.

Other modest industrial buildings are found primarily along East and West 23rd, 24th and 25th Streets. They are mostly one story with small storefront entries. Changes in the industrial nature of Norfolk's manufacturing business have led many buildings to be used currently as warehouses, building service providers and vehicle repair businesses.

Within the residential core of the Historic District there are a number of commercial corridors, which include portions of Granby Street, Monticello Avenue, Hampton Boulevard, Colley Avenue, and 35th Street. These commercial corridors developed primarily along the early streetcar lines. A number of lines were laid within the Park Place Historic District. The areas with the highest concentration of commercial buildings reflect the location of the streetcar and intersecting streetcar lines. The intersections of Granby Street and 35th Street, and Colley Avenue and 35th Street have high concentrations of commercial buildings. In addition, Colley Avenue had developed through the 20th century as a main commercial corridor. Commerce along this roadway extends presently from the areas south of the Historic District to the north of the Historic District. Commercial buildings are situated on the 500 to 700 blocks of 35th Street and the 2300 to 2800 blocks of Granby Street. Colley

Avenue is primarily commercial with both industrial and commercial buildings interspersed between the 2300 and 2700 blocks and then primarily commercial buildings between 2800 to 3600 blocks.

The remaining commercial buildings within these corridors date from the early 20th to mid-20th century. The early commercial buildings figure prominently on the street, have no setback beyond the sidewalk, and are situated at an intersection. Most are two-story, brick construction with large storefront windows. Examples of these types of buildings are 2501 Granby Street (1900) and 538 35th Street (1918). Similar forms are seen within the district including 3311 Colley Avenue (1917) and 3405 Colley Avenue (1922), which reflect multiple storefronts on the first story fronting the major roadway. By the period immediately after World War II, small shopping centers appeared on the landscape featuring small parking lots. An example of this type of commercial building is 2800 Colley Avenue (1946) and 3700 Hampton Boulevard (1953). These buildings are sited at intersections and feature small parking lots on the corner which access both streets.

New commercial buildings were added to the commercial corridors. They employed streamlined details found most commonly in the Art Deco and Art Moderne styles. The most prominent example is the store at 3400 Colley Avenue (1936) with its rounded corner and glass block windows. The Rosna Theater at 628 35th Street (1942) uses glazed brick of varying colors at a streamlined theater entrance and marquee and storefronts. This building, like the store at 3400 Colley Avenue (1936), is prominently located on the street and on the former streetcar line.

In addition to general commercial buildings, there are two auto dealerships located within the Historic District boundaries. Situated facing each other on Granby Street between West 26th and West 27th Streets (2602-2618 and 2609-2619 Granby Street, 1910 and 1920. respectively), they are two-story brick buildings with large storefront windows. In addition, they are situated on the main streetcar line leading to Lafayette Park and the east end of the Historic District. These buildings occupy most of the block and feature prominently within the commercial corridor of Granby Street in this area.

There are some commercial buildings within the district that have been converted to church use. These include the Rosna Theater at 628 35th Street (1942), 725 35th Street (circa 1950), 441 36th Street (1915), 3405 Colley Avenue (1922), and 2415 Colonial Avenue (circa 1950). Most have enclosed the storefront and installed narrow window openings, but have retained the original entrance location. In many cases the general building form is intact.

There are two theaters within the Historic District. The Rosna Theater at 628 35th Street and the Newport Theater at 600 35th Street reflect the development of the commercial corridor of 35th Street

near Colley Avenue. The Rosna Theater (1942) employs glazed brick veneer and the incorporation of commercial storefronts. Like the Rosna, the Newport Plaza and Theater (1930) also incorporates storefronts. Both theaters have marquees overhanging the sidewalks and are situated on the street and are situated in the main commercial center and on the streetcar line.

The churches within the Historic District vary in form, materials and style. Each is unique and figures prominently at its respective location. The Park Place Baptist Church located at 436 West 31st Street was constructed in 1903 and features Classical Revival details and stonework. Its large arched window openings dominate the street fronts on Colonial Ave and West 31st Street. The Episcopal Church of the Ascension at 301 West 32nd Street (1915) is a large Gothic Revival church situated on the corner of Llewellyn Avenue. It features an educational building of the same style, scale and massing to its south.

The Christian Temple at 303 34th Street (1922) is a large Gothic Revival-style edifice that towers over the adjacent residential buildings. Clad in stone veneer this building features a large stained glass window fronting Llewellyn Avenue and pavilioned entrances on 34th Street and its south elevation.

A complex of buildings associated with the Blessed Sacrament Church at 800 37th Street (1920) reflects the growth of this congregation through the early 20th century. The church is a modest Gothic Revival building with a rusticated stone veneer façade situated on the corner of 37th Street and Colley Avenue. The congregation had a school constructed to the south at 801 37th Street and a convent to the west at 814 37th Street in the 1950s. Though the church has a traditional form, the supporting buildings are modern in style and use brick veneered concrete block, and Moderne forms and elements.

Park Place Methodist Church at 500 34th Street (1949) occupies most of the block. Fronting 34th Street, the building extends to 35th Street. It is comprised of two compatible buildings. The church is Classical Revival with monumental stone pilasters supporting a heavy stone pediment. Pilasters and the cornice encompass the building. An educational facility of a similar size was constructed to the church's west. Though a much more simplified building with little articulation, the education facility reinforces its function and the church's prominence among the two adjoined buildings. Another Classical Revival church is the Knox Presbyterian Church at 427 37th Street (1940) with a brick structural system and classical entrance crowned by a cupola. This building is more simplified in form with a pedimented entrance marking its façade.

Smaller modest churches are situated through the district and mostly date to the mid-20th century. They incorporate simplified rectangular plans and have minimal details. The church at 111 East 25th

Street (circa 1950) is a small concrete block building with a projecting tower. Similar churches are located at 200 West 28th Street (circa 1940) and 202 34th Street (circa 1940).

Two historic parks are found within the Historic District. Hubbard Park and Munson Park were planned within the Old Dominion Place plan. The parks are open spaces and comprised of single blocks. Hubbard Park is a simple grass lot and Munson Park has been improved with a playground and basketball court. Most of it is still open space. Virginia Place, Park Place, and Kensington were not planned with parks. Virginia Place and Park Place were most likely not planned with parks since they are adjacent to the Lafayette Park, which was the city's first planned park established in 1892.

Approximately sixty percent of the buildings within the Park Place Historic District are residential types. Most are situated north of West 26th Street between Granby Street on the east and Killam Avenue on the west to 38th Street on the north. The single- and multiple-family dwellings within the Historic District reflect traditional forms of the late 19th and early 20th centuries and were mostly constructed during the period 1910 to 1920. The styles found among these buildings are primarily Craftsman, Bungalow, Colonial Revival and Queen Anne. The Craftsman style is represented chiefly by the American foursquare plan. Of those domestic buildings constructed during this period, the 1910 period reflects mostly Queen Anne and Colonial Revival styles, while the 1920 period reflects Craftsman and Bungalow styles. Among these styles there are some Shingle-style houses and hybrid buildings which combine elements from the four most frequently found styles.

The earliest and most prominent houses are located on the east end of the Historic District. Those fronting Granby Street and Lafayette Park from 33rd to 38th Street are the most ornate. The house at 3301 Granby Street (1912) is a massive Colonial Revival house with Classical pilasters, heavy cornices and an ornate porch. The house at 3401 Granby Street (1912) features a tower at the corner with an octagonal roof. It is also a massive house and occupies approximately one-fourth of the block.

Additionally, notable buildings front 35th Street at the east end. The house at 110 35th Street (1910) is a Shingle-style house with a complex roofline, heavy cornice and a massive appearance. Opposite this house is 200 35th Street (1911), which is Colonial Revival style with a rounded porch and Classical details on the roof cornice. Another Shingle-style house is nestled into the densely populated residential area on 37th Street at the corner of Newport Avenue. This house at 545 37th Street (1904) features a complex roof with wide eaves and heavily articulated wall surfaces of wood shingle and brick.

More modest Queen Anne houses can be found throughout the Historic District including 420 West 30th Street (1915) with its squat tower and projecting, canted bays. The most common Queen Anne style house is two-story, frame construction with projecting canted or squared bays, surmounted by a hipped roof with intersecting gables. Some feature dentiled roof cornices and dentiled porch cornices. Porch columns vary from Tuscan forms to Ionic forms. There are 292 Queen Anne-style buildings within the Historic District. They are found throughout the Historic District including, 110 West 30th Street (1897), 201 35th Street (1908), 200 West 27th Street (1905), and 3716 Colonial Avenue (1918).

The Colonial Revival style is also duly represented with 158 buildings. Most are modest and feature classical details such as articulated cornices and symmetrical facades. These buildings were constructed from the early 20th century to the end of the period of significance. The popularity of the Colonial Revival style in its varying forms is evident through the district. Some high style Colonial Revival-style houses have been mentioned above, but examples of more modest or simplified forms dating to the early 20th century can been seen at 2601 Granby Street (1908) and 428 West 30th Street (1903). These buildings feature mostly three-bay facades, gable roofs, with cornices and symmetrical facades. Examples of early 20th century Colonial Revival forms exhibiting Dutch characteristics can been seen at 849 West 34th Street (1928) and 532 West 25th Street (1906). These dwellings feature Colonial Revival proportions and gambrel roofs typical of the Dutch Colonial Revival.

During the late 1910s and through the 1920s, Craftsman-style dwellings were erected throughout the district. Many feature a heavier appearance with full front porch, battered piers, and hipped roofs. These buildings feature a horizontal emphasis versus a vertical emphasis found in Colonial Revival and Queen Anne forms. In addition, they typically feature side-gable and hipped roof forms with exposed rafters and brackets under the roof rakes. In addition the porch is sometimes incorporated within the building under the roof on the façade. This style highlights the building craft and minimalizes applied articulation, such as Classical elements and boxed cornices. A typical 1920s building style, the Craftsman-style buildings are seen throughout Norfolk in numerous forms.

There are 253 buildings with the Craftsman form, including 3714 Colonial Avenue (1913) and 311 West 26th Street (1923). These buildings are two story with hipped roofs and wood-shingled porches. 3714 Colonial Avenue is a higher style Craftsman house clad in wood shingles with a wraparound porch.

Another form typical of the Craftsman style is the Craftsman foursquare. Named for having four rooms on each story, the foursquare is two stories and has a generally rectangular form. Most often capped with a hipped roof, the building served the typical family and is common throughout Norfolk.

Examples of the foursquare form can be seen at 617 West 26th Street (1920). A similar form, which in many cases employs a foursquare interior plan, features large oversized dormers on the façade and rear elevation. In a number of cases the dormers partially shelter an open or partially enclosed sleeping porch. Examples of this type of building can be found at 701 West 29th Street (1920) and 735 34th Street (1918). These dwellings are much more modest in appearance.

Another form common to the Craftsman style is the Bungalow, which is a one-story dwelling with an open plan. In some cases the dwelling is one-and-one-half stories. It features characteristics similar to Craftsman dwellings including a horizontal emphasis, battered piers and gabled roofs. There are 81 Bungalows within the Historic District. Examples of this type of building include 529 West 28th Street (1920), 637 West 29th Street (1910), 434 34th Street (1918), and 1030 36th Street (1927).

In the early 1940s infill housing was added to some areas within the Historic District. These houses are modest frame dwellings of one story reflecting Colonial Revival-inspired forms. Mid-20th century Colonial Revival houses are more modest and minimal in design. These building forms are typically one to one-and-one half-stories and exhibit Cape Cod-style and Ranch-style forms. Most of these dwellings are seen in the north end of the Historic District, including the 400 block of 37th Street. These houses are lower to the ground and employ concrete block foundations and some have original asbestos siding. Examples of Cape Cod forms can be found at 311 37th Street (1949) and 3701 Gosnold Avenue (1940). These buildings were constructed upon lots that were platted, but originally were low-lying or marshy. Upon the filling of the marshlands in the late 1930s through the early 1940s, these lots became buildable and houses were constructed upon them.

Overall the form of the residential buildings has been maintained. Replacement materials have been used in many cases for roof treatment, exterior siding, doors and windows. Most commonly seen is roof material replacement including the use of asphalt shingles. Exterior siding has been maintained in many cases but has been covered with aluminum and vinyl siding. Windows and doors have also been subjected to replacement. The replacement windows and doors overall maintain the original openings.

Later single-family construction varied during the period between 1980 and 2000. Those dwellings constructed in the 1980s did not maintain the earlier building proportions and setbacks, and were privately constructed. Houses constructed at the turn of the 20th century as a part of the redevelopment efforts by the Norfolk Redevelopment and Housing Authority (NRHA) maintain the scale of surrounding houses constructed in the early 20th century. In an effort to maintain the neighborhood's character, building designs retain the original setbacks from the street, the original residential streetscape and general building forms. There is some construction which has not retained the original

character and forms of the earlier buildings and is primarily privately constructed. These are all considered non-contributing. Examples of this type of building form can be found in the 200 and 300 block of 35th Street.

Most houses were constructed for individual clients. There are some cases in which multiple lots were acquired and similar houses were constructed adjacent to one another by the builder. In most cases they are virtually identical except for minor modifications over time such as door replacements, and installation of modern replacement siding and roofing material. Examples of these groupings of houses can be found at 204, 206 and 208 West 26th Street (1906); 315, 317, and 319 West 26th Street (1912 to 1916); 618 and 622 36th Street (1916); and 208 and 210 37th Street (1910). Other examples are found throughout the Historic District. This practice continues through the present day, 2005, with the erection of apartment houses and other single-family dwellings. Similar designs are common among the single family housing constructed circa 2000 along 34th Street and 35th Street as a part of NRHA's redevelopment efforts.

In addition to single family housing there are also apartment buildings situated within the Historic District. The most notable are the Touraine at 431 West 31st Street (1915), Colonial Hall Apartments at 3412 Colonial Avenue (1925) and Camellia Court at 3709 Granby Street (1914). These large scale apartment buildings occupy corner lots and are three to four stories and are brick construction. The number of units varies but the buildings usually house more than eight units. Other more modest apartment buildings include those found at 529 37th Street (1924), 3706 and 3710 Colley Avenue (1910) and 739 38th Street (1921). These buildings are brick, comprise four units, and are similar in scale and massing to adjacent houses. Like the single-family houses there are cases where multiple apartments were constructed adjacent to each other. Similar apartments were constructed at 3706 and 3710 Colley Avenue (1910); 731, 735 and 739 38th Street (1921), and 527 and 535 36th Street (1918).

Smaller in scale than the apartment buildings are duplexes, which comprise two units. These dwellings are in keeping with the residential character of the main part of the Historic District and continue the general scale and massing of adjacent and surround residential buildings. Most commonly constructed in the 1910s and 1920s these buildings are mostly frame construction, though some are brick or concrete. The buildings' styles represent most common styles found in the early 20th century such as Colonial Revival, Queen Anne, and Craftsman. Examples of duplexes can be found at 708 36th Street (1916), 709 37th Street (1916), and 315 West 30th Street (1920).

Erection of multiple-family dwellings such as apartment buildings and duplexes continues into the mid to late 20th century, with the erection of two-story buildings with four or more units and one-story

buildings with two or three units. These buildings have similar characteristics, with wood frame or concrete block construction clad in brick veneer. Most feature flat or hipped roofs and are primarily grouped in the same general areas. Due to the construction of a number of these types of buildings within a specific area, portions of the original development plans have been determined to be outside of the Historic District boundaries. This is primarily found at the east end of the Historic District.

The Historic District reflects the original development plans, building forms, and density. Though functions of buildings and some material treatment have been added and modified, the overall character of the district has been maintained. Additionally, large areas of buildings within the original development plan that have been demolished have been omitted from the Historic District boundaries. The Historic District exhibits turn of the 20th century suburban development in the city of Norfolk.

Historic District Inventory:

The following inventory describes each contributing and non-contributing resource within the Historic District. Resources marked contributing were constructed during the period of significance (1884-1955) and retain sufficient integrity to support the Historic District's significance. Those resources denoted as non-contributing were either not constructed during the period of significance or do not retain sufficient integrity to support the Historic District's significance.

East and West 23rd Street

PROPERTY ADDRESS: **East and West 23rd Streets**
PROPERTY NAME: Norfolk Southern Railroad
OTHER NAME (S): Norfolk & Western Railroad
CONSTRUCTION DATE: 1884
DHR NUMBER (S): 122-5087-0166
DESCRIPTION (S):
This is a railroad constructed in 1884. It features two steel tracks resting on a gravel bed. It is oriented east-west south of East and West 23rd Streets.

- This is a railroad underpass constructed in 1951. The underpass is supported by reinforced concrete piers and features divided two-lane traffic lanes. There are pedestrian sidewalks flanking the lanes with metal railings. The underpass is approximately 15 feet below grade.

CONTRIBUTING (2 - structures)

West 23rd Street

PROPERTY ADDRESS: **420 West 23rd Street**
PROPERTY NAME: Warehouse, 420 West 23rd Street
OTHER NAME (S): Jerry's Alignment/Service Station
CONSTRUCTION DATE: 1928
DHR NUMBER (S): 122-5087-0138
DESCRIPTION (S):

This is a one-story warehouse designed in the Late 19th and Early 20th Century American Movement style and constructed in 1928. It incorporates a concrete slab foundation and 7-course, American bond brick structural system. The south façade features a single-leaf door, a metal, roll-up garage door and two metal, industrial windows. The roof is flat with a parapet coped in metal. There are two one-story concrete block ells appended to the north elevation. They are concrete block with flat roofs. The east ell was constructed in 1962 and the west ell was constructed in 1966.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **426 West 23rd Street**
PROPERTY NAME: Warehouse, 426 West 23rd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1935
DHR NUMBER (S): 122-5087-0139
DESCRIPTION (S):

This is a one-story warehouse designed in the Art Deco style and constructed in 1935. It incorporates a concrete slab foundation and parged concrete block structural system. The façade has a central pavilioned entrance containing the main entrance flanked by two plate glass windows. The wall above the primary entrance has a vertically-oriented corrugated texture, which is continue above the windows. These elements reinforced the vertical emphasis of the central pavilion. The primary entrance is recessed on the south façade and features a metal, single-leaf door. Flanking the pavilion are plain bays. The bay on the east has been altered to accommodate an overhead roll-up door. The west bay exhibits a metal, multi-light, industrial sash window. There is a metal, sign support system above the primary entrance, however it is not in use. The roof is front gable with a parapet. On the north elevation is a metal addition, roll-up garage door flanked by metal, industrial, multiple-light windows. There is a one-story, five-bay open shelter appended to the north elevation. It incorporates a concrete block structural system and a shed roof with visible, wood rafters.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **428 West 23rd Street**
PROPERTY NAME: Warehouse, 428 West 23rd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1954
DHR NUMBER (S): 122-5087-0140
DESCRIPTION (S):

This is a one-story warehouse designed in the Modern Movement style and constructed in 1954. It incorporates a concrete slab foundation and a concrete block structural system. The south façade features a metal, single-leaf door; a metal, roll-up garage door; and a three-light, metal, industrial window. There are also metal downspouts applied to the south façade. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **624 West 23rd Street**
PROPERTY NAME: Warehouse, 624 West 23rd Street
OTHER NAME (S): Yoder & Gordon, Inc./Harrow Warehouse
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-0141
DESCRIPTION (S):
This is a one-story warehouse designed in the Late 19th and Early 20th Century American Movement style and constructed in 1917. It incorporates a concrete slab foundation and a brick structural system. The building has 6-course, American bond brick walls with a central bay flanked by lower bays on the north and south elevations. The south elevation exhibits a centrally placed overhead track door. The west bay has been partially removed and the east bay has a boarded window opening. The north elevation features similar features, but reveals a brick jack-arch above the centrally placed overhead door. There is a gable roof behind the north and south wall parapets, which are coped in a rowlock brick course.
CONTRIBUTING (1 - building)

East 24th Street

PROPERTY ADDRESS: **110 East 24th Street**
PROPERTY NAME: Industrial Building, 110 East 24th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1953
DHR NUMBER (S): 122-5087-0142
DESCRIPTION (S):
This is a one-story industrial building designed in the Modern Movement style and constructed in 1953. It incorporates a concrete slab foundation and a concrete block structural system. The south façade is clad in brick veneer, which has been parged. The façade features three door openings with a metal, roll-up garage door and two single-leaf, metal doors. The door on the east portion of the façade has a transom, which has been filled, and parged. There are metal downspouts and lighting fixtures applied to the façade. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **200 East 24th Street**
PROPERTY NAME: Service Station, 200 East 24th Street

OTHER NAME (S):
CONSTRUCTION DATE: 1953
DHR NUMBER (S): 122-5087-0143
DESCRIPTION (S):
This is a one-story service station designed in the Late 19th and Early 20th Century American Movement style and constructed in 1953. It incorporates a concrete slab foundation and concrete block structural system. The south façade features a large door opening accessed by a wood door flanked by metal, industrial windows with rowlock brick sills. The west elevation features five openings. All of the openings on the west elevation have metal screens or gates applied to them. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **218 East 24th Street**
PROPERTY NAME: Warehouse, 218 East 24th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1949
DHR NUMBER (S): 122-5087-0144
DESCRIPTION (S):
This is a one-story, large-scale warehouse designed in the Modern Movement style and constructed in 1949. It incorporates a concrete slab foundation and metal, frame structural system clad in corrugated metal. The east portion of the south elevation has a metal, roll-up garage door. The building has a corrugated metal, front gable roof. There is a one-story office appended to the south wall at the west corner. The office features a corrugated metal, catslide roof with wide overhang and two, single-pane, metal windows framed by applied shutters. The office is concrete block construction clad in wood.
CONTRIBUTING (1 - building)

West 24th Street

PROPERTY ADDRESS: **112 West 24th Street**
PROPERTY NAME: Warehouse, 112 West 24th Street
OTHER NAME (S): Batchelder & Collins, Inc.
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0146
DESCRIPTION (S):
This is a one-story warehouse designed in the Late 19th and Early 20th Century American Movement style and constructed in 1912. It incorporates a concrete slab foundation and a 7-course, American bond brick structural system. The façade features two, single-leaf, metal doors and a metal, roll-up garage door. The garage door is flanked by paired, 12-light, metal, industrial windows. The façade and west elevation also feature industrial, metal, awning windows. All the windows have rowlock brick sills and most windows have bars over the openings. Windows on the east elevation are clerestory and grouped. There is a metal, roll-up garage door on

the north portion of the west elevation articulated by a raised parapet. The roof is flat with a stepped parapet on the façade. The parapet is coped with a rowlock brick course. The building has two interior, brick chimneys incorporated into the east and west elevation walls. The chimneys have corbelled caps.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **217 West 24th Street**
PROPERTY NAME: Warehouse, 217 West 24th Street
OTHER NAME (S): Decorum Furniture
CONSTRUCTION DATE: 1956
DHR NUMBER (S): 122-5087-0147
DESCRIPTION (S):
This is a two-story warehouse designed in the Moderne style and constructed in 1956. It incorporates a concrete slab foundation and concrete block structural system clad in brick veneer on the north façade and south corner of the west elevation. The façade features single-leaf, metal door and metal, industrial sash and fixed windows with limestone sills. There is a projecting, metal overhang applied to the façade of the building over the primary entrance and windows on the west end of the facade. The roof is flat and has a parapet with limestone coping. The parapet is elevated at the north corner of the west elevation. There is a one-story ell appended to the west elevation of the building at the south corner and loading docks are located on the west elevation surmounting the loading docks is an overhang. Ribbon windows line the roof above overhang. The parapet on the west wall is coped with metal. The ell's roof extends beyond it forming a covered bay. The south elevation is marked by loading docks surmounted by ribbon windows similar to those on the west elevation.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **226 West 24th Street**
PROPERTY NAME: Industrial Building, 226 West 24th Street
OTHER NAME (S):
CONSTRUCTION DATE: circa 1970
DHR NUMBER (S): 122-5087-0148
DESCRIPTION (S):
This is a two-story industrial building designed in the Modern Movement style and constructed circa 1970. It incorporates a concrete slab foundation and metal frame structural system clad in aluminum siding and concrete block. The primary entrance has a single-leaf, wood, paneled door with a light. There is a 6/6, double-hung, wood sash window framed by non-functional shutters on the first story façade. There is an asphalt-shingled, pent roof applied to the façade over the first story. The second story features metal, sliding windows. The building has an asphalt-shingled, front gable roof.

- The north building is appended to the north elevation of frame building and is perpendicular to the main building. It features a metal, roll-up garage door on the south elevation at the east corner and an asphalt-shingled, side gable roof. It dates to circa 1955.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **232 West 24th Street**
PROPERTY NAME: Warehouse, 232 West 24th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1950
DHR NUMBER (S): 122-5087-0149
DESCRIPTION (S):
This is a one-story warehouse designed in the Modern Movement style and constructed in 1950. It incorporates a concrete slab foundation and a concrete block structural system with a 5-course, American bond, brick veneer façade. The south façade features a single-leaf, metal door at the west corner and a metal, roll-up garage door flanked by metal, industrial, multiple-light windows. The roof is flat and the parapet has metal coping. There is an interior, brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **237 West 24th Street**
PROPERTY NAME: Warehouse, 237 West 24th Street
OTHER NAME (S): Modern Auto Body/The Desk Doctor
CONSTRUCTION DATE: 1949-1950
DHR NUMBER (S): 122-5087-0150
DESCRIPTION (S):
This is a one-story warehouse designed in the Modern Movement style and constructed in 1950. It incorporates a concrete slab foundation and concrete block structural system. The building has been parged. The façade of the building features a metal, roll-up garage door and metal, industrial, multiple-light windows. The primary entrance is a single-leaf door that is recessed from the building's facade. The east elevation features 4-light, metal, awning windows. The south elevation features three metal, roll-up garage doors. The roof is flat with a parapet coped in metal. The building has an interior, brick chimney. Two buildings have been appended at the south end of the west elevation.

- This is a one-story warehouse designed in the Modern Movement style and constructed in 1958. It is appended to the main building on the east elevation at the south end. It incorporates a concrete slab foundation and concrete block structural system. The building's façade and elevations have been parged. The south elevation of the building features a metal, roll-up garage door with concrete loading dock.
- This is a one-story warehouse designed in the Modern Movement style and constructed in 1958. It is appended to the west elevation of the building appended to the west elevation of the main building. It incorporates a concrete slab foundation and concrete block structural system. The building has been parged. The south elevation of the building features a loading dock with a metal, roll-up garage door and a single-leaf door accessed by concrete stairs. There are fixed windows on the west elevation, and a metal chimney appended to the north wall. The roof is flat with a parapet coped in metal.

CONTRIBUTING (1 - building)

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **238 West 24th Street**
PROPERTY NAME: Warehouse, 238 West 24th Street
OTHER NAME (S): Nesson Meat Sales/PFG
CONSTRUCTION DATE: circa 1910
DHR NUMBER (S): 122-5087-0151
DESCRIPTION (S):
This is a two-story warehouse designed in the Late 19th and early 20th Century American Movement style and constructed circa 1910. It incorporates a concrete slab foundation and a 7-course, American bond brick structural system. The first story facade features two metal, roll-up garage doors; two single-leaf, metal doors; and an industrial, metal, multiple-light window. The second story of the façade features paired, 1/1, aluminum, double-hung, sash windows with screens and rowlock brick sills. The roof is flat with a parapet coped in metal. The north end of the building is one story.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **245 West 24th Street**
PROPERTY NAME: Warehouse, 245 West 24th Street
OTHER NAME (S): Auto Body Contours
CONSTRUCTION DATE: 1946
DHR NUMBER (S): 122-5087-0152
DESCRIPTION (S):
This building is a one-story warehouse designed in the Modern Movement style and constructed in 1946. It incorporates a concrete slab foundation and parged, concrete block structural system. The west portion of the façade is setback from the east portion. The east portion of the façade features a metal, roll-up garage door; a single-leaf, metal door; and fixed, metal windows. The west portion features a metal, roll-up garage door. The roof is flat with a parapet coped in metal. The building has an interior, brick chimney. There is a corrugated, metal framed ell appended to the west elevation.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **248 West 24th Street**
PROPERTY NAME: Industrial Building, 248 West 24th Street
OTHER NAME (S): Court One
CONSTRUCTION DATE: 1944
DHR NUMBER (S): 122-5087-0153
DESCRIPTION (S):
This is a two-story industrial building designed in the Modern Movement style and constructed in 1944. It incorporates a concrete slab foundation and concrete block structural system clad in vinyl siding. The southwest corner of the building is canted with an entrance. The canted corner features a single-leaf, metal door with a metal overhang surmounting the door on the first story and a replacement, 1/1, vinyl, double-hung sash

windows. The building features individual and paired, 1/1, vinyl, double-hung, sash windows. There is a strip of aluminum siding forming a stringcourse applied to the south and west elevation walls between the first and second stories of the building. The roof is flat with a parapet coped in metal. The building is one story at the east and north ends.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **300 West 24th Street**
PROPERTY NAME: Service Station, 300 West 24th Street
OTHER NAME (S): Body & Fender Works/Absolute Stone
CONSTRUCTION DATE: 1946
DHR NUMBER (S): 122-5087-0155
DESCRIPTION (S):
This is a one-story service station designed in the Modern Movement style and constructed in 1946. It incorporates a concrete slab foundation and concrete block structural system. The facade is clad in brick veneer. The facade features a single-leaf, plate glass, metal door surmounted by a cloth awning. The windows are fixed with one light and metal frames. There are two courses of solider-course brick stringcourses at the top of the façade wall. The façade wall has rowlock-course brick coping. The west elevation features a metal, roll-up garage door and industrial, metal windows. The building has an interior, brick chimney. The roof is flat with a parapet. The east and west elevation walls are coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **301 West 24th Street**
PROPERTY NAME: Warehouse, 301 West 24th Street
OTHER NAME (S): Hajoca Corporation
CONSTRUCTION DATE: 1946
DHR NUMBER (S): 122-5087-0154
DESCRIPTION (S):
This is a one-story warehouse designed in the Modern Movement style and constructed in 1946. It incorporates a poured concrete foundation and 6-course, American bond brick structural system. The façade is clad in 6-course American Bond brick veneer. The primary entrance is a single-leaf, metal, and plate glass door. The facade features metal, plate glass, ribbon windows with rowlock brick sills. The east and west elevations feature metal, industrial sash windows. There is a loading dock and metal, roll-up garage door on the west elevation. The building has an interior, brick chimney.

- There is a one-story machine shed appended to the south corner of the west elevation. It incorporates a concrete slab foundation and metal frame structural system. The south and west elevations feature 6-course, American bond, brick veneer. The building is six bays long and has a corrugated metal gable roof. The west gable end has an oversized opening and there is corrugated metal in the gable. The building was constructed circa 1946.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **312 West 24th Street**
PROPERTY NAME: Industrial Building, 312 West 24th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1988
DHR NUMBER (S): 122-5087-0156
DESCRIPTION (S):
This is a one-story industrial building designed in the Modern Movement style and constructed in 1988. It incorporates a concrete slab foundation and concrete block structural system. The east façade and south elevation are clad in brick veneer. The primary entrance is recessed and features a single-leaf, plate glass and metal door. The windows are paired, fixed, 1-light and metal. There is a stringcourse of two brick solider-courses above the doors and windows on the east façade and north elevation. The roof is flat with a parapet coped in metal. A building is appended to the north elevation of this building.

- This is a one-story industrial building designed in the Modern Movement style and constructed circa 1990. It incorporates a concrete slab foundation and concrete block structural system. It is appended to the north elevation of the main building and is taller than the main building. It features a single-leaf, metal door and a metal, roll-up garage door on the east facade. The roof is flat with a parapet coped in metal.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **400 West 24th Street**
PROPERTY NAME: Store, 400 West 24th Street
OTHER NAME (S): Wholesale Refrigerator Supplies
CONSTRUCTION DATE: 1950-1951
DHR NUMBER (S): 122-5087-0157
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1950-1951. It incorporates a concrete slab foundation and concrete block structural system clad in common bond, brick veneer. The primary entrance is located on the canted southeast corner. It features double-leaf, glass doors flanked by plate glass windows and a transom. The windows are metal, industrial with multiple lights. Several of the windows on the south and east elevation have limestone sills. The roof is flat with a parapet coped in metal. The building has an interior, brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **403 West 24th Street**
PROPERTY NAME: Office, 403 West 24th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-0158
DESCRIPTION (S):

This is a two-story office building designed in the Late 19th and early 20th Century American Movement style and constructed in 1914. It incorporates a parged, brick foundation and parged, brick structural system. The building has circa 1950 ells appended to the west and east elevations. The main building features 2/2, wood, double-hung sash windows. The primary entrance on the main building has been filled with concrete block and relocated to the east elevation of the east ell. The main building also features a corbelled brick cornice at the roof line and metal coping. It has a flat roof. The ell on the east elevation is concrete block and is clad in brick veneer. The primary entrance of the building is located on the east elevation and features a single-leaf, plate glass door flanked by plate glass windows with rowlock sills. The roof is flat. The one-story ell on the west elevation features a parged, concrete block structural system and a flat roof.

- This is a one-story warehouse designed in the Modern Movement style and constructed circa 1960. It incorporates a solid, concrete block foundation and wood, frame structural system clad in plywood. The roof is gable and clad in corrugated metal.
- This is a one-story warehouse designed in the Modern Movement style and constructed circa 1960. It incorporates a solid, concrete block foundation and wood, frame structural system clad in plywood. The south elevation of the building features two door openings that have been boarded. The south elevation has been parged. The east elevation features a metal, roll-up garage door. The roof is gable and clad in corrugated metal.
- This is a one-story warehouse designed in the Modern Movement style and constructed circa 1990. It incorporates a concrete slab foundation and metal, frame structural system clad in corrugated metal. The roof is gable and clad in corrugated metal.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (3 - buildings)

PROPERTY ADDRESS: **411 West 24th Street**
PROPERTY NAME: Warehouse, 411 West 24th Street
OTHER NAME (S): Jerry's Complete Auto
CONSTRUCTION DATE: 1942
DHR NUMBER (S): 122-5087-0159
DESCRIPTION (S):
This is a one-story warehouse designed in the Modern Movement style and constructed in 1942. It incorporates a concrete slab foundation and concrete block structural system. The façade has been parged. The façade features a single-leaf, metal door and a metal, roll-up garage door. There are two metal, roll-up garage doors on the south elevation. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **417 West 24th Street**
PROPERTY NAME: Warehouse, 417 West 24th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1947

DHR NUMBER (S): 122-5087-0160
DESCRIPTION (S):
This is a one-story warehouse designed in the Modern Movement style and constructed in 1947. It incorporates a concrete slab foundation and concrete block structural system. The façade is clad in corrugated metal. The façade features a single-leaf, metal door with a light and a metal, roll-up garage door. There is a metal, industrial, multiple-light window on the façade. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **428 West 24th Street**
PROPERTY NAME: Cell Tower, 428 West 24th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1995
DHR NUMBER (S): 122-5087-0161
DESCRIPTION (S):
This is a ten-story cell tower. The foundation incorporates metal girders resting on concrete blocks. The tower is constructed of a metal frame with metal cladding.

- There is a one-story communications facility associated with the cell tower designed in the Modern Movement style and constructed circa 1995. It is located to the east of the cell tower. It incorporates a concrete slab foundation and concrete block structural system clad in composite panels. The façade features a single-leaf, metal door. The roof is flat.

NON-CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - structure)

PROPERTY ADDRESS: **430 West 24th Street**
PROPERTY NAME: Warehouse, 430 West 24th Street
OTHER NAME (S): A&J Auto Service/Phillips Glass
CONSTRUCTION DATE: 1970
DHR NUMBER (S): 122-5087-0162
DESCRIPTION (S):
This is a one-story warehouse designed in the Modern Movement style and constructed in 1970. It incorporates a poured concrete foundation and concrete block structural system. The south façade has been clad in stucco. The façade features a centrally placed single-leaf, metal door and a metal, roll-up garage door on the east end of the facade. The windows on the façade are metal, industrial windows framed by stuccoed, pilasters crowned by a metal cornice. The roof is flat with metal coping.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **435 West 24th Street/2314 Colonial Avenue**
PROPERTY NAME: Manufacturing Facility, 435 West 24th Street
OTHER NAME (S): Pittsburgh Plate Glass Co./Furniture Classics

CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-0163
DESCRIPTION (S):
This is a three-story manufacturing facility designed in Modern Movement style and constructed in 1916. It incorporates a concrete slab foundation and a 5-course, American bond brick structural system. The north façade and the west elevation have been stuccoed and feature multiple bays defined by sailor-brick courses and square brick medallions. The north façade features a double-leaf, metal door; a metal, roll-up door; and a wood, paneled, roll-up door. The first story windows have been clad in vertical board. The second story windows have been filled with vertical boards and concrete block. The third story features metal, industrial windows. The windows feature rowlock brick sills and header course brick lintels. There is a one-story storefront located on the south end of the west elevation. The storefront is clad in brick veneer and features a single-leaf metal door. An asphalt-shingled, shed roof surmounts the storefront. The roof is flat with a parapet.

- This is a one-story warehouse designed in Modern Movement style and constructed circa 1951. It incorporates a concrete slab foundation and a 5-course, American bond brick structural system. The north façade has been stuccoed and features three bays defined by sailor-brick courses and square brick medallions. The north façade features a centrally located, wood, paneled, roll-up garage door. The first story windows have been boarded. The second story features metal, industrial windows. The windows feature rowlock brick sills and header brick lintels. The roof is flat with a parapet.
- This is a one-story warehouse designed in the Modern Movement style and constructed circa 1951. It incorporates a concrete slab foundation and a concrete block structural system. The north façade features a centrally located, metal, roll-up door. The window and door openings on the north façade have been boarded. The roof is flat with a parapet coped in metal. There is a one-story, shed-roofed ell appended to the east elevation. The ell incorporates a concrete block foundation and multiple, open bays on the east elevation.

CONTRIBUTING (3 - buildings)

PROPERTY ADDRESS: **501 West 24th Street**
PROPERTY NAME: Warehouse, 501 West 24th Street
OTHER NAME (S): Tidewater Supply Company, Inc.
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0164
DESCRIPTION (S):
The earliest building was constructed in 1920 and is located at the west end of the block. The building is constructed of brick with a concrete slab foundation. It occupies a rectangular ground plan. The façade has been parged and exhibits a recessed entrance articulated by rounded, glass block walls and flanked by fixed, metal, plate glass windows. The windows on the façade are paired or grouped together. Each window grouping and the entrance are surmounted by a parged hood. There is a single-leaf door at the west end of the north façade. The west and south elevations are visible and feature overhead track, roll-up doors and multi-light, metal, industrial sash windows. The roof is flat. There is a brick chimney rising above the building with the

word "TIDE" applied to the sides denoting a previous business.

- In 1951 a concrete block building was appended to the east elevation of the earliest building. It is oriented east-west and extends along the north side of the 500 block of West 23rd Street to Colonial Avenue. It has a rectangular plan and exhibits multi-light, metal, industrial sash windows. A shed-roofed ell has been appended to the east elevation. It is concrete block with raised parapet walls.
- The current, combined building entrance is located on the north façade of the 1955 building, which was constructed to the east of the earliest building and north of the 1951 building. It abuts both buildings. It features a rusticated, coursed, stone plinth surmounted by a raised watertable on the north façade and east elevation. The entrance is articulated by a limestone surround. Windows on the north and east elevations are metal, have eight lights and are awning-type. The watertable forms the window sills. The window hoods are similar to those applied to the earliest building. The concrete block building has been parged above the plinth. The roof is not visible behind the parapet and the foundation is poured concrete.
- Circa 1970, an additional building was added to the site at the northeast corner of the block. It is detached from the other buildings. It is concrete block and has a rectangular ground plan. There are overhead track, roll-up, metal garage doors and a single-leaf door on the north elevation. The roof is flat and the foundation is poured concrete.

CONTRIBUTING (3 - buildings)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **510 West 24th Street**
PROPERTY NAME: Warehouse, 510 West 24th Street
OTHER NAME (S): Roof Systems of Virginia, Inc.
CONSTRUCTION DATE: circa 1970
DHR NUMBER (S): 122-5087-0165
DESCRIPTION (S):
This is a one-story warehouse designed in the Modern Movement style and constructed circa 1970. It incorporates a concrete slab foundation and concrete block structural system clad in stucco. The south façade features a brick plinth and watertable. Metal panels have been applied to the south facade. The primary entrance is a single-leaf, metal door with a light surmounted by a hipped-roofed, aluminum overhang. The roof is flat with a parapet coped in metal.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **520 West 24th Street**
PROPERTY NAME: Store, 520 West 24th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1965
DHR NUMBER (S): 122-5087-0167
DESCRIPTION (S):

This is a one-story store designed in the Modern Movement style and constructed in 1965. It incorporates a concrete slab foundation and concrete block structural system. The façade has been parged. The primary entrance is a double-leaf, metal, plate glass door surmounted by a transom. There is a metal, roll-up garage door on the west end of the façade. The garage door and primary entrance are surmounted by an aluminum overhang. The roof is flat with a parapet coped in metal.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **524 West 24th Street**
PROPERTY NAME: Garage, 524 West 24th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1966
DHR NUMBER (S): 122-5087-0168
DESCRIPTION (S):
This is a one-story garage designed in the Modern Movement style and constructed in 1966. It incorporates a concrete slab foundation and concrete block structural system. The building is setback from the streetscape. The south elevation features two, overhead-track, roll-up, metal doors and a single-leaf, metal door. The roof is flat with a parapet coped in metal.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **526 West 24th Street**
PROPERTY NAME: Warehouse, 526 West 24th Street
OTHER NAME (S): Copying Products, Inc./Safeway Steel Scaffolds
CONSTRUCTION DATE: 1961
DHR NUMBER (S): 122-5087-0169
DESCRIPTION (S):
This is one-story warehouse designed in the Modern Movement style and constructed in 1961. It incorporates a concrete slab foundation and concrete block structural system. The south and west elevations are clad in brick veneer. The southwest corner is canted containing an entrance, which is comprised of a single-leaf, plate glass door surmounted by a transom. The windows on the south and west elevations have been filled with wood panels. The east end of the south elevation is articulated by a projecting hood over the office door, which is single-leaf, plate glass and metal-framed. The hood has been clad in graveled tarpaper. There are three metal, roll-up garage doors and a single-leaf wood door with a light on the south elevation. The roof is flat and the parapet is coped with a rowlock brick course.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **600 West 24th Street**
PROPERTY NAME: Warehouse, 600 West 24th Street
OTHER NAME (S): Hagan Supply Co., Oil Burners
CONSTRUCTION DATE: 1932
DHR NUMBER (S): 122-5087-0170

DESCRIPTION (S):
This is one-story warehouse designed in the Late 19th and Early 20th Century American Movement style and constructed in 1932. It incorporates a concrete slab foundation and wood frame structural system clad in corrugated metal siding. The south façade has been treated with stucco. The building has 6/6, aluminum, double-hung sash windows. The south facade features a single-leaf, metal door with a light and a single-leaf, wood, paneled door with a fan-shaped light. The roof is side gable with a metal cornice. There is a one-story, flat-roofed ell appended to the north elevation. The ell is slightly taller the main building and has a metal, roll-up garage door.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **606 West 24th Street**
PROPERTY NAME: Store, 606 West 24th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1952
DHR NUMBER (S): 122-5087-0171
DESCRIPTION (S):
This is one-story store designed in the Modern Movement style and constructed in 1952. It incorporates a concrete slab foundation and concrete block structural system. The south façade is clad in brick veneer. The entrance is recessed on the facade. The windows on the façade have been filled with wood panels and the windows on the west elevation have been filled with concrete block and parged. The window openings have rowlock brick sills. There is a rowlock, brick course above the storefront. The windows on the west elevation have been boarded. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **610 West 24th Street**
PROPERTY NAME: Warehouse, 610 West 24th Street
OTHER NAME (S): Industrial Hard Chromium Plating Equipment Co.
CONSTRUCTION DATE: 1957
DHR NUMBER (S): 122-5087-0172
DESCRIPTION (S):
This is one-story warehouse designed in the Modern Movement style and constructed in 1957. It incorporates a concrete slab foundation and concrete block structural system. The south facade has been parged and features a metal, roll-up garage door and a metal, single-leaf door. Metal, 24-light, industrial sash windows are located at the west end of the south façade. The north elevation features a loading dock with a metal, roll-up garage door.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **616 West 24th Street**
PROPERTY NAME: Industrial Building, 616 West 24th Street
OTHER NAME (S): Blue Printing
CONSTRUCTION DATE: 1947

DHR NUMBER (S): 122-5087-0173
DESCRIPTION (S):
This is one-story industrial building designed in the Modern Movement style and constructed in 1947. It incorporates a concrete slab foundation and concrete block structural system. The south elevation has been parged on the west end. The west end of the south elevation has a single-leaf, metal door surmounted by a metal, shed-roofed overhang. The windows are fixed and metal. The roof is flat with a parapet coped in metal.

- A one-story, concrete block warehouse is appended to the west elevation of the main building. It is set back forty feet from the main building's south façade. Constructed in 1950, it features an overhead track, roll-up door with wood panels. There is a metal single-leaf door with metal overhang and boarded window on its south façade. The foundation is poured concrete and the roof is flat. The parapet had metal coping.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **619 West 24th Street**
PROPERTY NAME: Warehouse, 619 West 24th Street
OTHER NAME (S): L. Chenman Junk Yard
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-0174
DESCRIPTION (S):
This is one-story warehouse designed in the Late 19th and Early 20th Century American Movement style and constructed in 1921. It incorporates a concrete slab foundation and 5-course, American bond brick structural system. The north elevation features a single-leaf, metal door surmounted by a cloth awning and a 6/6, wood, double-hung, sash window with a rowlock brick sill. There are also two loading docks on the north elevation. One of the loading dock openings has been filled with concrete block, the other features a metal, roll-up garage door. The east elevation features two metal, roll-up garage doors and boarded window openings. The south elevation features loading docks and boarded window openings. The roof is flat with a parapet.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **628 West 24th Street**
PROPERTY NAME: Officie Building, 628 West 24th Street
OTHER NAME (S): Barnum & Bruns Iron Works Inc./Hustead's Canvas Creations
CONSTRUCTION DATE: 1926
DHR NUMBER (S): 122-5087-0175
DESCRIPTION (S):
This is one-story office building designed in the Modern Movement style and constructed circa 1990. It incorporates a concrete slab foundation and concrete block structural system. The south façade features a single-leaf, metal door with a light surmounted by an awning. The roof is flat with a parapet.

- This is a one-story, large-scale, industrial building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1926. It incorporates a concrete slab foundation and

concrete block structural system with a corrugated metal clad frame structural system on the upper portion. The south entrance is comprised of double-leaf, metal doors with lights surmounted by two fixed metal windows. The north elevation features two, single-leaf, metal doors; flanking two metal, roll-up garage doors. The roof is gable with a shed-roofed bay on the east end and is clad in corrugated metal. On the roof apex are several, metal, circular vents.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **629 West 24th Street**
PROPERTY NAME: Warehouse, 629 West 24th Street
OTHER NAME (S): Refrigeration Co./Geo. J. Schultz Co./Norfolk Plate/Norfolk Brass
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0176
DESCRIPTION (S):

This is a two-story warehouse designed in the Late 19th and 20th Century American Movement style and constructed in 1920. It incorporates a concrete slab foundation and 6-course, American bond brick structural system. The three-bay building has a central block flanked by one-story wings. The first story of the north elevation is punctuated by multi-light, metal, industrial sash windows with rowlock brick sills. The central block of the north elevation is articulated on the second story with a raised, rectangular brick frame. The east and west elevations reveal window openings and windows similar to those on the north elevation. There are windows on the second story of the central block and first story of the wings. Some openings have been obscured by the office on the west elevation and warehouse on the east elevation. The roof is flat and obscured by a stepped parapet with rowlock coping.

- An office was added in 1935 to the west of the main building at the north elevation. It has a canted northwest corner with interlocking bricks at the edges. The single-leaf, metal door is articulated by a stepped parapet similar in style to the parapet found on the main warehouse. The west and north elevations are punctuated by windows similar to those on the main building. The office is connected to the main building by a hyphen. Vents are located at the base of the west and north walls.
- Appended to the east end of the main warehouse is a 1942 concrete block warehouse. Unlike the office and main warehouse, this is a simplified building with no articulation. It features an overhead track, metal, roll-up door; industrial sash windows; and single-leaf door sheltered by a cloth awning on the north elevation. The roof is flat and the parapet walls have metal coping.

CONTRIBUTING (3 - buildings)

PROPERTY ADDRESS: **701 West 24th Street**
PROPERTY NAME: Industrial Building, 701 West 24th Street
OTHER NAME (S): Construction Supply Company
CONSTRUCTION DATE: 1960
DHR NUMBER (S): 122-5087-0177

DESCRIPTION (S):
This resource is a large-scale, one-story industrial building designed in the Modern Movement style and constructed in 1960. It incorporates a concrete slab foundation and metal frame structural system. The south, east, and west elevations are concrete block at the base of the building with corrugated metal siding on the upper portion. The north facade is clad in vinyl siding and features a one-story, one-bay porch with a flat, corrugated metal roof and metal posts. There are two, single-leaf, metal doors with lights. On the north façade are metal, sliding windows. The east elevation features four oversized, metal, roll-up doors. The large door openings on the south elevation have been filled with concrete block. The roof is comprised of three front gables and is clad in corrugated metal. The building has metal vents on the gable apex.
NON-CONTRIBUTING (1 - building)

East 25th Street

PROPERTY ADDRESS: **111 East 25th Street**
PROPERTY NAME: Church, 111 East 25th Street
OTHER NAME (S): Evangelistic Center/Faith Covenant Church
CONSTRUCTION DATE: circa 1950
DHR NUMBER (S): 122-5087-0182
DESCRIPTION (S):
This building is a one-story church designed in the Modern Movement style and constructed circa 1950. It incorporates a concrete slab foundation and concrete block structural system. The façade of the building has been parged. The primary entrance has recessed, double-leaf, metal, paneled doors. There are two single-leaf, wood doors and two fixed, metal windows on the façade. The window and door openings have raised arched surrounds. The roof is flat with a stepped parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **114 East 25th Street**
PROPERTY NAME: Industrial Building, 114 East 25th Street
OTHER NAME (S): Sheet Metal Shop
CONSTRUCTION DATE: 1944
DHR NUMBER (S): 122-5087-0183
DESCRIPTION (S):
This is a one-story industrial building designed in the Modern Movement style and constructed in 1944. It incorporates concrete slab foundation and concrete block structural system. The façade is clad in brick veneer and wood panels. The primary entrance is centrally-located on the south façade and is recessed from the south façade wall. The façade features two wood, roll-up garage doors with lights. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **121 East 25th Street**
PROPERTY NAME: Service Station, 121 East 25th Street
OTHER NAME (S): Atlantic Retread/B. F. Goodrich
CONSTRUCTION DATE: 1953
DHR NUMBER (S): 122-5087-0184
DESCRIPTION (S):
This is a one-story service station designed in the Modern Movement style and constructed in 1953. It incorporates a concrete slab foundation and concrete block structural system clad in brick veneer. The north façade features two, centrally-placed, wood, roll-up garage doors with lights and panels, and two metal, roll-up garage doors located on the west end. The storefront located at the east end of the north façade is comprised of a boarded, plate glass, single-leaf door surmounted by an awning and plate glass, storefront windows with rowlock brick sills. There is also a metal, industrial sash window located on the façade between the storefront and centrally-placed garage doors. The roof is flat with a parapet coped in rowlock bricks.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **209 East 25th Street**
PROPERTY NAME: Store, 209 East 25th Street
OTHER NAME (S): Grandy/Orkin
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0185
DESCRIPTION (S):
This is a one-story store designed in the Late 19th and Early 20th Century American Movement style and constructed in 1912. It incorporates solid, brick foundation and 5-course, American bond brick structural system. The north façade has been parged and features a wood, paneled, roll-up garage door with lights. Two door openings have been filled with brick on the east elevation. There is a double-leaf, wood, sliding door on the west elevation. The building features metal, industrial sash windows. There is an interior, brick chimney with a plain brick cap. The roof is front gable with a stepped parapet on the north and south ends and is clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **211 East 25th Street**
PROPERTY NAME: Industrial Building, 211 East 25th Street
OTHER NAME (S): Canada Dry Bottling Co., Inc./Purewater Technologies
CONSTRUCTION DATE: 1923
DHR NUMBER (S): 122-5087-0186
DESCRIPTION (S):
This is a one-story an industrial building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1923. The building occupies an L-shaped footprint on the property. It incorporates a concrete slab foundation and concrete block structural system clad in corrugated metal. The façade has been parged. The north façade features a metal, roll-up garage door and the window openings that have been filled

with concrete block. The roof is front gable with a stepped parapet coped in metal. The roof is clad in corrugated metal. There are three vents on the roof ridge. There is a 1954 concrete block ell to the south and a 1984 concrete block ell to the east. The ell to the east continues the facade.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **220 East 25th Street**
PROPERTY NAME: Service Station, 220 East 25th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1955
DHR NUMBER (S): 122-5087-0187
DESCRIPTION (S):
This is a one-story service station designed in the Modern Movement style and constructed in 1955. It incorporates concrete slab foundation and concrete block structural system. The south façade features two metal, roll-up garage doors and a single-leaf, metal door. The windows on the façade are metal and industrial sash with rowlock brick sills. There is a single-leaf door and roll-up garage door on the east elevation. The roof is flat coped in metal. A concrete block addition was made to the north in 1960.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **317 East 25th Street**
PROPERTY NAME: Warehouse, 317 East 25th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1951
DHR NUMBER (S): 122-5087-0188
DESCRIPTION (S):
This is a one-story warehouse designed in the Modern Movement style and constructed in 1951. It incorporates concrete slab foundation and concrete block structural system. The north façade features a single-leaf, wood, paneled door and plate glass windows at the east corner. There are also 5/5, metal, double-hung sash, industrial windows located on the west end of the façade. The east elevation features 5/5, metal, double-hung sash windows. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

West 25th Street

PROPERTY ADDRESS: **111 West 25th Street**
PROPERTY NAME: Warehouse, 111 West 25th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0189
DESCRIPTION (S):

This is a one-story warehouse designed in the Late 19th and Early 20th Century American Movement style and constructed in 1919. It incorporates a concrete slab foundation and parged brick structural system. The building occupies the west portion of the lot. Only the façade is visible. It incorporates an overhead track, roll-up door and a boarded window opening. The roll-up door has an applied chain-link gate. The parapet is coped in brick.

- This secondary resource is a non-contributing warehouse constructed circa 1970. The façade features a single-leaf, wood door and a window opening that has been boarded with plywood. There is a metal, roll-up garage door with chain-link gates covering the door openings. The east elevation features metal, industrial sash windows with rowlock brick sills. Several of the window openings on the east elevation have been filled with concrete block. The roof is flat with a parapet. There is stretcher bond brick coping on the façade. The building features an interior, concrete block, corbelled, parged chimney.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **115 West 25th Street**
PROPERTY NAME: Industrial Building, 115 West 25th Street
OTHER NAME (S): J. U. Audenbrooks & Sons, Inc.
CONSTRUCTION DATE: 1913
DHR NUMBER (S): 122-5087-0190
DESCRIPTION (S):
This is a one-story industrial building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1913. It incorporates a concrete slab foundation and a 5-course, American bond, brick structural system. The north façade features two, metal roll-up doors and a wood, paneled, roll-up door with boarded lights. A portion of the façade wall on the west end has been built up with concrete block. The roof is flat with a parapet coped in rowlock bricks.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **118 West 25th Street**
PROPERTY NAME: Service Station, 118 West 25th Street
OTHER NAME (S): Mizzelle's
CONSTRUCTION DATE: 1959
DHR NUMBER (S): 122-5087-0191
DESCRIPTION (S):
This is a one-story service station designed in the Modern Movement style and constructed in 1959. It incorporates concrete slab foundation and concrete block structural system. The south façade features a single-leaf, metal door, a roll-up, metal garage door and metal, industrial sash windows with rowlock brick sills. The east elevation also features metal, industrial windows with rowlock brick sills. There is a one-story ell appended to the west elevation of the building. The ell is slightly shorter than the main building. The west elevation of the ell features three garage bays with metal, roll-up doors. The roof is flat with a parapet coped in metal.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **119 West 25th Street**
PROPERTY NAME: Office Building, 119 West 25th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1913
DHR NUMBER (S): 122-5087-0192
DESCRIPTION (S):
This is a one-story office building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1913. It incorporates a brick foundation partially clad in rusticated stone veneer and a wood frame structural system clad in asbestos siding. The window and door openings on the north façade have been boarded. There is a metal, awning surmounting the centrally located door opening. The roof is gable clad in asphalt shingles with cornice returns. The façade gable features a rectangular-shaped, louvered vent. There is an intersecting roof on the east elevation.

- This is a one-story manufacturing facility designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It is appended to the west elevation of the main building. It incorporates a brick foundation and a 5-course, American Bond brick structural system. The north façade features a single-leaf, metal door and a metal, roll-up door. There is an oversized, metal vent surmounting the single-leaf entrance. Portions of the façade surrounding the garage door entrance have been filled concrete block. The west elevation features two, metal, roll-up doors; window and door openings filled with concrete block; and an oversized, metal vent puncturing the wall. The roof is gable clad in asphalt shingles. There is a parged, gable-roofed parapet on the south elevation.
- This is a one-story manufacturing facility designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It is appended to the south elevation of the main building. It incorporates a brick foundation and a 5-course, American Bond brick structural system. The roof is flat.

CONTRIBUTING (3 - buildings)

PROPERTY ADDRESS: **200 West 25th Street**
PROPERTY NAME: House, 200 West 25th Street
OTHER NAME (S): Apartment Building, 200 West 25th Street
CONSTRUCTION DATE: 1903
DHR NUMBER (S): 122-5087-0193
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1903. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The south façade features a one-story, two-bay porch with a central entrance. The porch has wood, Tuscan columns supporting the asphalt-shingled, hipped roof. The primary entrance is a single-leaf, wood, paneled door with a metal, storm door. The windows on the façade are 1/1, wood, double-hung sash with storm windows. Other windows found on the side elevations include metal, sliding windows. There is an additional entrance on the west elevation of

the house at the south corner. It is comprised of a single-leaf, wood, paneled door surmounted by a metal awning. The roof is cross-gable with cornice returns and is clad in asphalt shingles. The house features an interior, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **201 West 25th Street**
PROPERTY NAME: Industrial Building, 201 West 25th Street
OTHER NAME (S): High Rock Ginger Ale Co.
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-0194
DESCRIPTION (S):
This is a one-story industrial building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1917. It incorporates a brick foundation and 7-course, American bond brick structural system. The north façade features several window and door openings that have been filled with concrete block and four metal louvered vents. There is a glass block window with a rowlock brick sill on the south end of the north façade. The building features a two-story, brick parapet wall on the south end of the east elevation. The roof is flat with a stepped parapet and a corbelled cornice on the north façade. There is a one-story, wood-frame enclosure on the roof. The enclosure is clad in wood panels and features a flat roof.

- This is a one-story industrial building designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a brick foundation and 7-course, American bond brick structural system. There is a single-leaf, metal door with a light on the south end of the east elevation. The east elevation features a metal, roll-up door and glass block windows. The roof is flat with a stepped parapet on the east elevation. The parapet is coped in a rowlock brick course. There is a one-story addition appended to the west elevation of the manufacturing facility constructed circa 1970. It incorporates a concrete slab foundation and a concrete block structural system clad in brick veneer. The addition features a storefront on the south elevation. The storefront is comprised of a recessed, single-leaf entrance and a storefront window that has been filled with concrete block. There is an asphalt-shingled, pent roof surmounting the storefront. The roof is flat.
- This is a one-story warehouse designed in the Modern Movement style and constructed circa 1970. It incorporates a concrete slab foundation and concrete block structural system. The south façade features a centrally located, metal, roll-up door. The roof is flat with a parapet coped in metal.

CONTRIBUTING (2 - buildings)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **206 West 25th Street**
PROPERTY NAME: Warehouse, 206 West 25th Street
OTHER NAME (S): City Roofing & Construction Co.
CONSTRUCTION DATE: 1961
DHR NUMBER (S): 122-5087-0195

DESCRIPTION (S):
This is a one-story warehouse designed in the Modern Movement style and constructed in 1961. It incorporates concrete slab foundation and concrete block structural system. The building occupies an L-shaped footprint on the property and wraps 200 West 25th Street. The east portion of the south façade is clad in brick veneer and features a single-leaf metal door surmounted by a metal awning. There are metal, awning windows on the façade. The west portion of the south façade has metal, industrial sash windows and a metal, roll-up garage door. The east elevation features a single-leaf, metal door surmounted by a metal awning and metal, industrial windows. The east portion extends north of 200 West 25th Street terminating at Omohundro Avenue. This east elevation exhibits an overhead-track, roll-up garage door. The roof is flat and the parapet is coped in metal.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **208 West 25th Street**
PROPERTY NAME: Service Station, 208 West 25th Street
OTHER NAME (S): Lumpkins Production Auto Paint Co.
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0196
DESCRIPTION (S):
This is a two-story service station designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a concrete slab foundation and a brick structural system. The south facade is clad in common bond brick veneer. The facade features two, single-leaf, metal doors and a metal, roll-up door. The single-leaf doors are located within the original window and door openings that have been filled with brick. The windows on the second story are fixed, metal, industrial sash windows with rowlock brick sills. These windows are smaller than the original window openings, which have been partially filled with brick. This pattern is continued on the east and west elevations. The roof is flat with a stepped parapet coped in rowlock bricks. There is a brick chimney on the west wall.

- This is a one-story service station designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a concrete slab foundation and a brick structural system. The south facade is clad in common bond brick veneer. The facade features a centrally-placed, metal, roll-up garage door. Window openings on the façade flanking the door have been filled with common bond brick. The roof is flat with a stepped parapet coped in rowlock bricks.
- This is a one-story service station designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a concrete slab foundation and a brick structural system. The south facade is clad in common bond brick veneer. The facade features a single-leaf, metal, door located within a bricked window opening at the west end of the façade, and a centrally-placed, metal, roll-up door. The east window opening on the façade has been filled with common bond brick. The roof is flat with a stepped parapet coped in rowlock bricks. The building features an interior, brick wall chimney with a corbelled cap on the west elevation.

CONTRIBUTING (3 - buildings)

PROPERTY ADDRESS: **209 West 25th Street**
PROPERTY NAME: Store, 209 West 25th Street
OTHER NAME (S): Dry Cleaning, 209 West 25th Street
CONSTRUCTION DATE: 1938
DHR NUMBER (S): 122-5087-0197
DESCRIPTION (S):
This is a one-story store designed in the Late 19th and Early 20th Century American Movement style and constructed in 1938. It incorporates concrete slab foundation and a 7-course, American bond brick structural system. The north façade features a single-leaf, plate glass door surmounted by a transom. The windows on the façade and west elevation are metal and industrial sash with rowlock brick sills. The west elevation features a single-leaf, metal door at the south end. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **219 West 25th Street**
PROPERTY NAME: Laundry, 219 West 25th Street
OTHER NAME (S): Home Steam Laundry
CONSTRUCTION DATE: 1925
DHR NUMBER (S): 122-5087-0198
DESCRIPTION (S):
This is a one-story laundry designed in the Late 19th and Early 20th Century American Movement style and constructed in 1925. It incorporates a brick foundation and a 7-course, American bond brick structural system. The window and door openings on the north façade have been filled with concrete block. The west elevation features a centrally located, one-story, shed-roofed ell. The roof of the ell extends to the north and south forming large overhangs supported by metal posts. The west elevation features two, single-leaf, metal doors. There is a single-leaf, plate glass door surmounted by a transom on the east elevation. The south elevation features metal, roll-up doors, and a single-leaf, metal door surmounted by a corrugated metal, pent roof. There is a one-story addition appended to the south elevation. The addition was constructed in 1953 and incorporates a concrete slab foundation and a concrete block structural system. The addition features a roll-up, metal door and a flat roof. The building features a monitor roof with a stepped parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **220 West 25th Street**
PROPERTY NAME: Industrial Building, 220 West 25th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1976
DHR NUMBER (S): 122-5087-0199
DESCRIPTION (S):
This is a one-story industrial building designed in the Modern Movement style and constructed in 1976. It incorporates concrete slab foundation and steel, frame structural system clad in corrugated metal. The south façade features a metal, roll-up garage door on the east portion and an open garage bay on the west portion. The

west portion of the façade is taller than the east portion. The roof is flat and clad in corrugated metal.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **226 West 25th Street**
PROPERTY NAME: Warehouse, 226 West 25th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1954
DHR NUMBER (S): 122-5087-0210
DESCRIPTION (S):
This is a one-story warehouse designed in the Modern Movement style and constructed in 1954. It incorporates concrete slab foundation and concrete block structural system. The south façade features an oversized, sliding, overhead-track, metal door. The window and door openings on the façade have been filled with concrete block. The east elevation features a double-leaf, sliding, metal garage door. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **233 West 25th Street**
PROPERTY NAME: Apartment Building, 233 West 25th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1954
DHR NUMBER (S): 122-5087-0211
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1954. It incorporates a concrete slab foundation and concrete block structural system clad in brick veneer. This apartment building has six units and an enclosed stair with rounded treads and risers. Each unit features a single-leaf, metal door and grouped, metal, awning windows with rowlock brick sills. The second story façade features a metal balustrade. The roof is flat with wide eaves.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **238 West 25th Street**
PROPERTY NAME: Warehouse, 238 West 25th Street
OTHER NAME (S): Alliance Collision Center, Inc./Service Center, 238 West 25th Street
CONSTRUCTION DATE: 1954
DHR NUMBER (S): 122-5087-0212
DESCRIPTION (S):
This is a one-story warehouse designed in the Modern Movement style and constructed in 1954. It incorporates concrete slab foundation and concrete block structural system. The south facade clad is common bond brick veneer and features a centrally-located, metal, roll-up door. There are also three, single-leaf, metal doors surmounted by transoms, and metal, industrial sash windows. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **239 West 25th Street**
PROPERTY NAME: Industrial Building, 239 West 25th Street
OTHER NAME (S): VA Safety Supply, Inc.
CONSTRUCTION DATE: 1948
DHR NUMBER (S): 122-5087-0213
DESCRIPTION (S):
This is a one-story industrial building designed in the Modern Movement style and constructed in 1948. This building occupies an L-shaped footprint on the property. It incorporates a concrete slab foundation and concrete block structural system. Portions of the north facade are clad in common bond brick veneer and others portions have been parged. The façade features a single-leaf, wood, paneled door and three, boarded, octagonal windows. Appended to the west elevation of the south corner is a 1970 concrete block ell exhibiting metal, industrial sash windows and single-leaf doors. The west elevation features a double-leaf, wood, sliding, garage door and a single-leaf, metal door. To the west of the 1970 ell is a 1980 ell with two overhead-track, roll-up doors on the façade. All roofs are flat with parapets.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **244 West 25th Street**
PROPERTY NAME: Store, 244 West 25th Street
OTHER NAME (S): Krazy Kwilt Café
CONSTRUCTION DATE: 1965
DHR NUMBER (S): 122-5087-0214
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1965. It incorporates a concrete slab foundation and concrete block structural system. The south façade is clad in common bond brick veneer. The primary entrance is a single-leaf, metal, plate glass door. There is another single-leaf door on the facade, but it has been boarded. The windows are fixed, metal and plate glass. The building features a built-up shed roof whose three sides are clad in vinyl.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **247 West 25th Street**
PROPERTY NAME: Garage, 247 West 25th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1948
DHR NUMBER (S): 122-5087-0215
DESCRIPTION (S):
This is a one-story garage designed in the Modern Movement style and constructed in 1948. It incorporates a concrete slab foundation and concrete block structural system. The façade features two garage bays. The east garage bay has a metal, roll-up garage door. The west garage bay contains a roll-up door, but has been modified to include a double-leaf, metal door surmounted by a cloth awning. There is an asphalt-shingled, pent roof

applied to the façade on the west portion of the building. There is a concrete block wall extending north from the building's façade on the east elevation. The west elevation is clad in vinyl siding. The roof is flat with a parapet coped in metal. The building features an interior, parged, concrete block chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **301 West 25th Street**
PROPERTY NAME: Store/Dwelling, 301 West 25thStreet
OTHER NAME (S):
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-0002 122-0753
DESCRIPTION (S):
This is a two-story store/dwelling constructed in the Late 19th and Early 20th Century American Movement style and constructed in 1905. It incorporates a brick foundation and structural system. The north façade is clad in common bond brick veneer. The east end of the first story façade features a storefront comprised of a centrally placed, single-leaf, metal, paneled door; a tiled plinth; and storefront windows with wood shutters. Vertical board surmounts the storefront. The west end of the façade features a single-leaf, wood, paneled door with two lights surmounted by a transom and accessed by granite stairs flanked by brick cheek walls. The transom is surmounted by a brick jack arch. The building features 6/6, wood, double-hung sash windows surmounted by brick jack arches. The façade features a polychrome brick, corbelled cornice. The roof is flat with a parapet coped in a rowlock brick course. The building features an interior, brick chimney imbedded in the east elevation wall.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **303 West 25th Street**
PROPERTY NAME: House, 303 West 25th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0216
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1906. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The house has a three-bay façade with a one-story, three-bay porch. The porch has replacement, wood posts and turned, wood posts supporting the asphalt-shingled, hipped roof. The windows on the façade are replacement, 6/6, metal, double-hung sash. The primary entrance is a single-leaf, wood, paneled door surmounted by a transom. The roof is front gable and clad in asphalt shingles. The house features an interior, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **304 West 25th Street**
PROPERTY NAME: Warehouse, 304 West 25th Street
OTHER NAME (S): Store, 304 West 25th Street

CONSTRUCTION DATE: 1947
DHR NUMBER (S): 122-5087-0217
DESCRIPTION (S):
This is a one-story warehouse designed in the Modern Movement style and constructed in 1947. It incorporates a concrete slab foundation and concrete block structural system. The south façade is three-bay clad in common bond brick veneer. The primary entrance is comprised of a centrally-placed, single-leaf, wood, paneled, door with lights and a wrought iron storm door. There are fixed, plate glass, storefront windows on the facade. There is a metal awning frame applied to the façade. There are freestanding, brick walls that extend to the east and west of the building's façade. The roof is flat with a parapet coped in rowlock bricks.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **309 West 25th Street**
PROPERTY NAME: Store, 309 West 25th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1945
DHR NUMBER (S): 122-5087-0218
DESCRIPTION (S):
This is a two-story store designed in the Colonial Revival style and constructed in 1945. It incorporates a concrete slab foundation and concrete block structural system. The first story façade is clad in brick veneer while concrete block walls are visible on the side and rear elevations. The second story of the building is frame clad in vinyl siding. The first story façade features a single-leaf, wood, paneled door; a fixed, multiple-light window with a rowlock brick sill; and a metal, roll-up garage door. The second story windows are 8/8, wood, double-hung sash. The roof is front gable and clad in asphalt shingles. The building features an interior, brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **312 West 25th Street**
PROPERTY NAME: Multiple Family Dwelling, 312-318 West 25th Street
OTHER NAME (S): Industrial Building, 312 West 25th Street
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0219
DESCRIPTION (S):
This resource is a former, two-story multiple family dwelling designed in the Late 19th and Early 20th Century American Movement style and constructed in 1910. It was altered in 1982 to serve as a storage building. It incorporates a concrete slab foundation and brick structural system clad in stucco. The two west units have no openings. The eastern middle unit exhibits a metal, roll-up garage door. On the east unit, the windows are 6/6, wood, double-hung sash surmounted by jack arches and the single-leaf door remains. The façade also features a corbelled brick cornice with a triangular motif. The roof is flat with a parapet. The interior was gutted and a poured concrete foundation was installed. In addition, walls dividing the units were removed.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **320 West 25th Street**
PROPERTY NAME: Multiple Family Dwelling, 320-326 West 25th Street
OTHER NAME (S): Industrial Building, 320 West 25th Street
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0220
DESCRIPTION (S):
This resource is a former, two-story multiple family dwelling industrial building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1910. It was altered in 1982 to serve as a storage building. It incorporates a concrete slab foundation and brick structural system clad in stucco. The two west units have no openings. The eastern middle unit exhibits a metal, roll-up garage door. On the east unit, the windows are 6/6, wood, double-hung sash surmounted by jack arches and the single-leaf door remains. The façade also features a corbelled brick cornice with a triangular motif. The roof is flat with a parapet. The interior was gutted and a poured concrete foundation was installed. In addition, walls dividing the units were removed.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **328 West 25th Street**
PROPERTY NAME: Warehouse, 328 West 25th Street
OTHER NAME (S): Pepsi-Cola Bottling Co. Storage
CONSTRUCTION DATE: 1941
DHR NUMBER (S): 122-5087-0221
DESCRIPTION (S):
This resource is a one-and-one-half-story warehouse designed in the Modern Movement style and constructed in 1941. It incorporates a concrete slab foundation and concrete block structural system. The façade features an open garage bay on the west end that has been altered to include a single-leaf, plate glass door and plate glass window. There is also a single-leaf door located on the east end of the façade. The east end entrance is comprised of a projecting, canted porch with an asphalt-shingled, octagonal roof, wood posts and a finial. The asphalt-shingled, gable roof clad in vinyl siding was added in 1986. The windows in the gable are 1/1, vinyl, double-hung sash.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **406 West 25th Street**
PROPERTY NAME: Warehouse, 406 West 25th Street
OTHER NAME (S): Pepsi-Cola Bottling Co. Storage
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0222
DESCRIPTION (S):
This is a two-story warehouse designed in the Late 19th and Early 20th Century American Movement style and constructed in 1918. It incorporates a concrete slab foundation and brick structural system. The building has

been parged. The first story façade features a single-leaf, metal door and a metal, roll-up garage door. Pilasters appended to the building's façade frame the garage door. The second story façade features 1/1, wood, double-hung sash windows. There is an open stair appended to the east elevation of the building accessing a metal frame, corrugated metal clad ell. The roof is flat with a stepped parapet coped in metal.

- This is a one-story warehouse designed in the Late 19th and early 20th Century American Movement style and constructed circa 1930. It incorporates a concrete slab foundation and brick structural system. The building has been parged. The facade features two, single-leaf, metal doors and a metal, roll-up garage door. Pilasters appended to the building's façade frame the garage door. The roof is flat with a parapet.
- This is a one-story warehouse designed in the Modern Movement style and constructed circa 1992. It incorporates a concrete slab foundation and concrete block structural system. The building has been parged. The facade features a single-leaf, metal doors and a metal, roll-up garage door. The roof is front gable.

CONTRIBUTING (2 - buildings)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **416 West 25th Street**
PROPERTY NAME: Industrial Building, 416 West 25th Street
OTHER NAME (S): Distinctive Caseworks
CONSTRUCTION DATE: 1985
DHR NUMBER (S): 122-5087-0223
DESCRIPTION (S):
This resource is a one-story industrial building designed in the Modern Movement style and constructed in 1985. It incorporates a concrete slab foundation and concrete block structural system. The building has been parged. The south façade features a single-leaf, metal door and two, roll-up, metal garage doors. The roof is flat with a parapet coped in metal.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **424 West 25th Street**
PROPERTY NAME: Store, 424 West 25th Street
OTHER NAME (S): Porter-Cable
CONSTRUCTION DATE: 1949
DHR NUMBER (S): 122-5087-0224
DESCRIPTION (S):
This resource is a one-story store designed in the Modern Movement style and constructed in 1949. The building occupies a T-shaped footprint on the property. It incorporates a concrete slab foundation and concrete block structural system. The south façade is clad in common bond brick veneer. The façade features a single-leaf, plate glass door flanked by plate glass windows surmounted by a cloth awning. The roof is flat with a stepped parapet coped in metal.

- In 1959, a warehouse was appended to the north of the store. It incorporates a concrete slab foundation and concrete block structural system. The east portion of the south façade features a double-leaf, wood door surmounted by an asphalt-shingled, pent roof. The west portion of the south façade is an open garage bay with metal framing. The building features an interior, brick chimney.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **429 West 25th Street**
PROPERTY NAME: Warehouse, 429 West 25th Street
OTHER NAME (S): Sampson Coating
CONSTRUCTION DATE: 1969
DHR NUMBER (S): 122-5087-0225
DESCRIPTION (S):
This resource is a one-story warehouse designed in the Modern Movement style and constructed in 1969. It incorporates a concrete slab foundation and concrete block structural system. The building has been parged. The building is setback from the roadway. The primary entrance is comprised of a single-leaf, plate glass door framed by plate glass windows and surmounted by a transom. There are metal, industrial windows with rowlock brick sills. The roof is flat. 433 West 25th street is appended to the east end.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **432 West 25th Street**
PROPERTY NAME: Store, 432 West 25th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1935
DHR NUMBER (S): 122-5087-0226
DESCRIPTION (S):
This is a one-story store designed in the Late 19th and early 20th Century American Movement style and constructed in 1935. It incorporates a concrete slab foundation and concrete block structural system. The building has been parged. The primary entrance is comprised of a single-leaf, wood, paneled door framed by wood pilasters and surmounted by a metal-clad, hipped roof overhang with wood cornice and brackets. The windows are 6/6, wood, double-hung sash with rowlock brick sills. The roof is flat with a parapet coped in metal. There is a one-story ell appended to the north elevation of the building. The ell incorporates a frame structural system clad in vinyl siding. There is a single-leaf door and a 2/2, vinyl, double-hung sash window located on the east elevation of the ell. The roof is flat with a parapet coped in metal.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1980. It incorporates a concrete slab foundation and metal, frame structural system clad in corrugated metal siding. It has a shed roof coped in metal.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **433 West 25th Street**
PROPERTY NAME: Store, 433 West 25th Street
OTHER NAME (S): Sampson Coating
CONSTRUCTION DATE: 1960-1961
DHR NUMBER (S): 122-5087-0227
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1960-1961. It incorporates a concrete slab foundation and concrete block structural system. The north façade is clad in brick veneer and features an asphalt-shingled, false mansard roof. The primary entrance is a single-leaf, metal door with a light. The windows are fixed, wood, multiple-light windows with rowlock brick sills. There is a one-story ell appended to the east elevation. The ell features a metal, roll-up garage door and a single-leaf, metal door. The roof is flat with a metal cornice. 429 West 25th street is appended to the south end.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **504 West 25th Street**
PROPERTY NAME: Service Station, 504 West 25th Street
OTHER NAME (S): Jim's Auto Service
CONSTRUCTION DATE: 1945
DHR NUMBER (S): 122-5087-0228
DESCRIPTION (S):
This is a one-story service station designed in the Modern Movement style and constructed in 1945. It incorporates a concrete slab foundation and concrete block structural system. The front gable on the south façade is clad in corrugated metal. The south façade features two-garage bays with metal, roll-up doors and a single-leaf, metal door. The east and west elevations of the building feature metal, industrial sash windows. The roof is front gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **509 West 25th Street**
PROPERTY NAME: Industrial Building, 509 West 25th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1981
DHR NUMBER (S): 122-5087-0229
DESCRIPTION (S):
This is a one-story industrial building designed in the Modern Movement style and constructed in 1981. The building occupies an L-shaped footprint. It incorporates a concrete slab foundation and concrete block structural system. The building has been treated with stucco. The primary entrance is located on the east elevation of the projecting west portion of the building. The east elevation features a single-leaf, metal door and a fixed, plate glass window. The north elevation of the east portion features a metal, roll-up garage door. The roof is flat with a parapet coped in metal.

NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **513 West 25th Street**
PROPERTY NAME: Quonset Huts, 513 West 25th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1945
DHR NUMBER (S): 122-5087-0230
DESCRIPTION (S):
This is a one-story Quonset Hut designed in the Modern Movement style and constructed in 1945. This building is located at the east end of the lot. This building consists of a flat-roofed, one-story entrance block with a rounded, corrugated metal Quonset Hut form appended to south elevation. The building incorporates a concrete slab foundation. The entrance block has a concrete block structural system. The primary entrance is a metal, roll-up garage door. The building features a metal roof.

- This is a one-story Quonset Hut designed in the Modern Movement style and constructed in 1945. This building is located at the west end of the lot. This building consists of a flat-roofed, one-story entrance block with a rounded, corrugated metal Quonset Hut form appended to south elevation. The building incorporates a concrete slab foundation. The entrance block has a concrete block structural system. The primary entrance is a metal, roll-up garage door. The building features a metal roof.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **514 West 25th Street**
PROPERTY NAME: Store, 514 West 25th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1946
DHR NUMBER (S): 122-5087-0231
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1946. The building formerly housed four commercial interests. The building incorporates a concrete slab foundation and concrete block structural system. The south façade is clad in wood panels and stucco. The façade features several single-leaf, metal doors and two, metal, roll-up garage doors. Centrally located on the façade is a projecting, one-bay, false mansard-roofed overhang that is supported by stuccoed, concrete block posts. The east elevation features a metal, roll-up garage door and metal, industrial sash windows with rowlock brick sills. The roof is flat with a stepped parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **515 West 25th Street**
PROPERTY NAME: Industrial Building, 515 West 25th Street
OTHER NAME (S): GTI Systems, Inc.
CONSTRUCTION DATE: 1945

DHR NUMBER (S): 122-5087-0232
DESCRIPTION (S):
This is a one-story industrial building designed in the Modern Movement style and constructed in 1945. The building incorporates a concrete slab foundation and concrete block structural system. The north façade has been parged. The façade features a single-leaf, metal door and a metal, roll-up garage door. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **521 West 25th Street**
PROPERTY NAME: Store, 521 West 25th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1946
DHR NUMBER (S): 122-5087-0233
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1946. The building incorporates a concrete slab foundation and concrete block structural system. The north façade is clad in rusticated stone veneer. The façade features a single-leaf, plate glass door and a metal, industrial sash window with concrete sills. A cloth awning surmounts the windows and door on the façade. The east elevation features 2/2, metal, double-hung sash windows with concrete sills. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **522 West 25th Street**
PROPERTY NAME: Store, 522 West 25th Street
OTHER NAME (S): Shaddeau Roofing Corp.
CONSTRUCTION DATE: 1952
DHR NUMBER (S): 122-5087-0234
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1952. It incorporates a concrete slab foundation and concrete block structural system. The south façade is clad in brick veneer. The façade features two storefronts. The storefront entrances occupy the central portion of the façade and are flanked by fixed storefront windows. The door on the east storefront is single-leaf, wood, and paneled with lights. The window openings on the façade have been filled with wood panels. There is a projecting, corrugated metal overhang with streamline Moderne details appended to the façade. The west elevation features a metal, roll-up garage door and metal, industrial sash windows. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **530 West 25th Street**
PROPERTY NAME: Store, 530 West 25th Street
OTHER NAME (S): E.G. Carroll General Contractor
CONSTRUCTION DATE: 1946

DHR NUMBER (S): 122-5087-0235
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1946. It incorporates a concrete slab foundation and wood frame structural system. The south façade is clad in brick veneer and the east and west elevations are clad in asbestos shingles. The south façade features a single-leaf, metal, paneled door and plate glass windows. The west elevation features a single-leaf, metal, paneled door and a roll-up, metal, paneled garage door. The windows on the west elevation are 2/2, wood, double-hung sash. The roof is front gable clad in asphalt shingles.

- This is a one-story industrial storage building designed in the Modern Movement style and constructed circa 1950. It incorporates a concrete slab foundation and concrete block structural system. The south façade is clad in asbestos shingles and portions have been parged. The south façade features a single-leaf, metal door with a light surmounted by a projecting, pent roof overhang clad in asphalt shingles. The roof is side gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **532 West 25th Street**
PROPERTY NAME: House, 532 West 25th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0236
DESCRIPTION (S):
This is a two-story house designed in the Dutch Colonial Revival style and constructed in 1906. It incorporates a brick foundation and wood frame structural system clad in asbestos shingles. There is a one-bay, partially enclosed porch incorporated under the southeast corner of the building. The porch features wood posts, a turned spindle balustrade, and metal awnings. There is a projecting, canted bay on the first story façade that includes three, 18-light, casement, metal windows. The canted bay is surmounted by an asphalt-shingled, hipped roof. Other windows on the house include six-light and four-light, metal windows. The roof has a cross-gable, gambrel form with gable returns. It is clad in asphalt shingles. The house features an interior, parged, brick chimney. There is a one-story, cross gable-roofed ell on the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **535 West 25th Street**
PROPERTY NAME: Manufacturing Facility, 535 West 25th Street
OTHER NAME (S): Budget Restaurant Equipment
CONSTRUCTION DATE: 1960
DHR NUMBER (S): 122-5087-0237
DESCRIPTION (S):
This resource is a one-story manufacturing facility designed in the Modern Movement style and constructed in 1960. It incorporates a concrete slab foundation and concrete block structural system clad in brick veneer. The primary entrance is located on the canted northwest corner and is comprised of a single-leaf, metal door with a

boarded transom. The window openings on the north and west elevation flanking the entrance have been filled with concrete block and have rowlock brick sills. There is a single-leaf, wood door with a boarded transom and filled window opening located on the east end of the north elevation. The roof is flat with a parapet coped in rowlock bricks.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **600 West 25th Street**
PROPERTY NAME: Office Building, 600 West 25th Street
OTHER NAME (S):
CONSTRUCTION DATE: circa 1970
DHR NUMBER (S): 122-5087-0238
DESCRIPTION (S):
This is a one-story office building designed in the Modern Movement style and constructed circa 1970. This building occupies a U-shaped footprint on the property. The building incorporates a concrete slab foundation with a concrete block structural system clad in brick veneer. This building is comprised of several office units. Each unit features an entrance with a single-leaf, metal door surmounted by a transom. Projecting, asphalt-shingled, gable-roofed porches supported by wood posts surmount each entrance. The building features metal, plate glass and awning windows. The entrance on the southeast corner of the building features a brick, *brise-soliel* wall and a projecting, flat-roofed porch. The east elevation features fixed, metal windows with rowlock brick sills. The roof is flat with a parapet coped in metal.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **601 West 25th Street**
PROPERTY NAME: Store, 601 West 25th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1952
DHR NUMBER (S): 122-5087-0239
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1952. The building incorporates a concrete slab foundation with a 5-course, American bond, brick structural system. The primary entrance is located on the canted northeast corner and is comprised of a single-leaf, plate glass door surmounted by a transom. The door and transom have been filled with plywood. There are two storefronts at the west end of the north elevation. They have centrally-placed, single-leaf door openings flanked by windows openings. The window and door openings on the north and east elevations have been boarded with plywood and feature rowlock brick lintels and sills. There is a glass block window with a rowlock brick sill and lintel located at the west end of the north elevation. The roof is flat with a parapet coped in metal.

- This is a one-story warehouse designed in the Modern Movement style and constructed circa 1950. This building is slightly taller than the main building. It incorporates a concrete slab foundation with a concrete block structural system. The north façade is clad in brick veneer. The façade features a single-

leaf, metal door and a roll-up, metal garage door. The windows on the façade have been boarded with plywood and feature rowlock brick sills. The roof is flat coped in metal.
CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **614 West 25th Street**
PROPERTY NAME: Store, 614 West 25th Street
OTHER NAME (S): Store, 612-614 West 25th Street
CONSTRUCTION DATE: 1945
DHR NUMBER (S): 122-5087-0240
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1945. This building occupies an L-shaped footprint on the property. The building incorporates a concrete slab foundation with a concrete block structural system clad in brick veneer. The south façade features a single-leaf, wood door at the west end and a loading dock with a wood, roll-up door with lights on the east end. There are fixed, metal, industrial sash windows with rowlock brick sills on the façade. At the east end of the building is a setback block, which features a metal, paneled, roll-up door. The roof is flat with a corbelled brick cornice coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **616 West 25th Street**
PROPERTY NAME: Store, 616 West 25th Street
OTHER NAME (S): B&N Construction
CONSTRUCTION DATE: 1947
DHR NUMBER (S): 122-5087-0241
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1947. It incorporates a concrete slab foundation and a concrete block structural system. The south façade features a storefront with a single-leaf, metal door flanked by plate glass windows. There is a single-leaf, wood door with a light on the west elevation. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **619 West 25th Street**
PROPERTY NAME: Store, 619 West 25th Street
OTHER NAME (S): Wenger Tile & Plastering
CONSTRUCTION DATE: 1949
DHR NUMBER (S): 122-5087-0242
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1949. It incorporates a concrete slab foundation with a concrete block structural system. The building has been parged. The north façade features a single-leaf, wood door. The window on the façade is three-part consisting of a single-light,

metal, fixed window framed by two, 1/1, metal, double-hung sash windows. The windows have applied wrought iron bars. The roof is flat with a parapet coped in metal. There is an exterior, parged chimney with a corbelled cap on the west elevation.

- This is a one-story warehouse designed in the Modern Movement style and constructed circa 1950. This building is appended to the south elevation of the main building. It incorporates a concrete slab foundation with a concrete block structural system. The building has been parged. The west elevation features a garage bay. The roof is flat with a stepped parapet coped in metal.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **620 West 25th Street**
PROPERTY NAME: Quonset Hut, 620 West 25th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1945
DHR NUMBER (S): 122-5087-0243
DESCRIPTION (S):
This is a one-story Quonset Hut designed in the Modern Movement style and constructed in 1945. It incorporates a concrete slab foundation and concrete block structural system. The façade of the Quonset Hut is clad in brick veneer. The south façade features a single-leaf, metal door and a metal, roll-up door. The roof is rounded and clad in corrugated metal. There are covered openings on the rounded sides of the roof.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **624 West 25th Street**
PROPERTY NAME: Warehouse, 624 West 25th Street
OTHER NAME (S): Atlantic Office Warehouse
CONSTRUCTION DATE: 1986
DHR NUMBER (S): 122-5087-0244
DESCRIPTION (S):
This is a one-story warehouse designed in the Modern Movement style and constructed in 1986. It incorporates a concrete slab foundation and metal frame structural system. The south façade is concrete block clad in brick and stone veneer. The side and rear elevations are clad in corrugated metal siding. The façade features three, roll-up, metal doors and three, single-leaf, metal doors. The door on the west end of the façade is surmounted by a metal awning. The roof is flat with a parapet.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **636 West 25th Street**
PROPERTY NAME: Service Station, 636 West 25th Street
OTHER NAME (S): Hurdles
CONSTRUCTION DATE: 1946
DHR NUMBER (S): 122-5087-0245

DESCRIPTION (S):
This is a one-story service station designed in the Modern Movement style and constructed in 1946. It incorporates a concrete slab foundation and concrete block structural system. The building has been parged. The south façade features a projecting garage bay with a metal, roll-up garage door. The primary entrance is located on the west elevation of the projecting garage bay in a vertically emphasized pavilion with a glass block window. The entrance is a single-leaf, wood, paneled door. The window openings on the west and east elevation have been boarded. There is a projecting ell on the west elevation of the building that features two, roll-up garage doors. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **705 West 25th Street**
PROPERTY NAME: Industrial Building, 705 West 25th Street
OTHER NAME (S): Nehi Bottling Company, Inc.
CONSTRUCTION DATE: 1928
DHR NUMBER (S): 122-5087-0246
DESCRIPTION (S):
This is a one-story industrial building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1928. It incorporates a brick foundation and a brick structural system. The north façade features a boarded, single-leaf entrance surmounted by a boarded transom. The window openings have been filled with brick. The building features a flat roof with a parapet coped in three rowlock brick courses. The building features an interior, brick chimney embedded in the west elevation wall.

- This is a one-story manufacturing facility designed in the Modern Movement style and constructed circa 1950. This building is appended to the west elevation of the main building. It incorporates a concrete slab foundation and a concrete block structural system that has been parged. The north façade features a centrally located garage door opening that has been filled with concrete block. The west elevation features a one-story, flat-roofed loading dock setback from the façade. The loading dock features a metal, roll-up door. The roof is flat with a parapet coped in metal.
- This is a one-story manufacturing facility designed in the Modern Movement style and constructed circa 1950. This building is appended to the east elevation of the main building. It incorporates a concrete slab foundation and a concrete block structural system clad in brick veneer. The window openings on the north façade have been filled with brick. The roof is flat with a parapet and a corbelled cornice.
- This is a one-story warehouse designed in the Modern Movement style and constructed circa 1970. It incorporates a concrete slab foundation and a concrete block structural system. The north façade features a metal, roll-up garage door. A garage door opening on the west end of the façade has been filled with concrete block. The east elevation has been parged and features metal, industrial sash windows with rowlock brick sills. The roof is flat with a parapet coped in metal.

CONTRIBUTING (3 - buildings)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **708 West 25th Street**
PROPERTY NAME: Garage, 708 West 25th Street
OTHER NAME (S):
CONSTRUCTION DATE: circa 1970
DHR NUMBER (S): 122-5087-0247
DESCRIPTION (S):
This is a one-story garage designed in the Modern Movement style and constructed circa 1970. It incorporates a concrete slab foundation and wood frame structural system clad in asbestos siding. The south façade features two, roll-up, metal garage doors. The roof is front gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **710 West 25th Street**
PROPERTY NAME: Store, 710 West 25th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1949
DHR NUMBER (S): 122-5087-0368
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1949. It incorporates a concrete slab foundation and parged, concrete block structural system. The south façade features two entrances separated by a parged raised panel applied to the facade. Each entrance is comprised of a single-leaf, metal, paneled door with a storm door surmounted by cloth awnings. The building features fixed, plate glass and 1/1, metal, double-hung sash windows with rowlock brick sills. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **718 West 25th Street**
PROPERTY NAME: Industrial Building, 718 West 25th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1953-1954
DHR NUMBER (S): 122-5087-0248
DESCRIPTION (S):
This is a one-story industrial building designed in the Modern Movement style and constructed in 1953-1954. It incorporates a concrete slab foundation and concrete block structural system clad in vinyl siding. The south façade features a recessed entrance in the west corner comprised of a single-leaf, wood, paneled door. There is a pent-roofed, asphalt-shingled overhang appended to the east elevation. The roof is front gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **824 West 25th Street**
PROPERTY NAME: Industrial Storage, 824 West 25th Street
OTHER NAME (S): Eastern Burlap & Trading Co.

CONSTRUCTION DATE: 1955
DHR NUMBER (S): 122-5087-0251
DESCRIPTION (S):
This is a one-story industrial storage building designed in the Modern Movement style and constructed in 1955. It incorporates a concrete slab foundation and concrete block structural system. The south façade features four roll-up, metal garage doors and a single-leaf, metal door. There is an applied, concrete molding surmounting the garage door on the west end of the façade. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **840 West 25th Street**
PROPERTY NAME: Industrial Building, 840 West 25th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1949
DHR NUMBER (S): 122-5087-0252
DESCRIPTION (S):
This is a one-story industrial building designed in the Modern Movement style and constructed in 1949. It incorporates a concrete slab foundation and concrete block structural system clad in brick veneer. The south façade features a single-leaf door surmounted by a metal awning and metal, industrial sash windows with rowlock brick sills. The west elevation features a wood, paneled, roll-up, garage door and metal, industrial sash windows with rowlock brick sills. There is also a single-leaf, metal door on the west elevation at the north corner. The roof is flat with a parapet coped in metal.

- There is a 1949 industrial storage building to the east of the main building. It incorporates a concrete slab foundation a concrete block structural system clad in brick veneer. There is an overhead-track, roll-up door on the south elevation. The west elevation has open bays.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **916 West 25th Street**
PROPERTY NAME: Industrial Building, 916 West 25th Street
OTHER NAME (S): Flatlanders Hot Rods
CONSTRUCTION DATE: 1948
DHR NUMBER (S): 122-5087-0254
DESCRIPTION (S):
This is a one-story industrial building designed in the Modern Movement style and constructed in 1948. It incorporates a concrete slab foundation and concrete block structural system. The south façade has been clad in stucco. The façade features a single-leaf, metal door, and metal, industrial sash windows with rowlock brick sills. The east and west elevations feature metal, roll-up garage doors and metal, industrial sash windows with rowlock brick sills. There is a one-story, shed-roofed porch supported by metal posts appended to the north elevation. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

East 26th Street

PROPERTY ADDRESS: **111 East 26th Street**
PROPERTY NAME: House, 111 East 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1909
DHR NUMBER (S): 122-5087-0259
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1909. It incorporates a parged, brick foundation and wood frame structural system clad in vinyl siding. There is evidence of Bricktex siding under the vinyl siding. The house is currently vacant and in poor condition. The north façade features a one-story, two-bay porch with a hipped roof. The porch posts and balustrade are clad in vinyl siding and the porch roof is clad in standing-seam metal. The windows on the façade include replacement, 1/1, double-hung sash windows on the second story and a fixed window in the gable. The first story windows have been boarded with plywood. The primary entrance is comprised of a single-leaf, wood door surmounted by a transom and flanked by sidelights. The transom and sidelights have been filled with vinyl siding and plywood. The roof is front gable with cornice returns and is clad in asphalt shingles. There is an intersecting gable on the east elevation and an interior, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

West 26th Street

PROPERTY ADDRESS: **109 West 26th Street**
PROPERTY NAME: Laundry, 109 West 26th Street
OTHER NAME (S): Mt. Joy Church of God in Christ
CONSTRUCTION DATE: circa 1950
DHR NUMBER (S): 122-5087-0260
DESCRIPTION (S):

This is a two-story laundry was designed in the Modern Movement style and constructed circa 1950. It incorporates a concrete slab foundation and a parged, concrete block structural system. The building has a single-leaf, metal door and metal, industrial sash windows. The roof is gable clad in asphalt shingles. This building was a store converted to a church circa 1980.

- This manufacturing facility was designed in the Modern Movement style and constructed circa 1950. It features a concrete block structural system clad in brick veneer and a single-leaf, metal door. The window openings have been partially bricked, and the original windows have been replaced with fixed, metal, industrial sash windows. The rowlock brick sills from the original windows are still visible. The area within the gable on the façade is clad in vinyl siding. There is a roll-up garage door on the west

elevation that features a projecting overhang. There is also a one-story, gable-roofed ell appended to the south elevation of the main building. The roof is comprised of a gable with two intersecting gables clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **110 West 26th Street**
PROPERTY NAME: Apartment Building, 110 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1992
DHR NUMBER (S): 122-5087-0261
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1992. It incorporates a concrete block foundation and wood frame structural system clad in vinyl siding. The east and west ends of the building have lower roofs and are smaller blocks than the central block. The façade features a two-story, wood porch on the central block with wood staircases located at the east and west ends of the façade. The porch has a concrete foundation. There is also one-story breezeway centrally located on the south façade extending to the north of the property. The building contains several apartment units. Each unit features a single-leaf, metal door and 6/6, metal, double-hung sash windows. Air conditioning units are mounted to the building's walls. The roof is side gable clad in asphalt shingles whose eaves form the porch roof on the south façade.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **201 West 26th Street**
PROPERTY NAME: House, 201 West 26th Street
OTHER NAME (S): Duplex, 201 West 26th Street
CONSTRUCTION DATE: 1897
DHR NUMBER (S): 122-5087-0262
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1897. It incorporates a brick foundation. The first story has a 7-course, American bond brick structural system and the second story is wood frame clad in vinyl siding. The north façade features a one-story, two-bay porch with a front-gable, asphalt-shingled roof. The porch roof forms a pediment supported by simplified, square, wood, fluted columns resting on parged, brick pedestals. The pediment is clad in vinyl siding. The primary entrance is comprised of a single-leaf, wood, paneled door with a decorative light surmounted by a transom. The house features 1/1, vinyl, double-hung sash windows and vinyl, sliding windows. The roof is a Jerkinhead gable with intersecting gables on the east and west elevations, and is clad in asphalt shingles. A shed-roofed dormer has been added to the west elevation at the south corner.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **204 West 26th Street**

PROPERTY NAME: House, 204 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0263
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1906. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south facade features a one-story, two-bay porch with an asphalt-shingled, hipped roof supported by replacement, fluted columns. The primary entrance is comprised of a single-leaf, wood, paneled door with a light surmounted by a transom. The house features 1/1, aluminum, double-hung sash windows with screens. The roof is a hipped-cross-gable form clad in asphalt shingles. The house features an interior, brick chimney with a corbelled cap on the east elevation. There is a second story porch at the northeast corner of the house.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **205 West 26th Street**
PROPERTY NAME: Apartment Building, 205 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1981
DHR NUMBER (S): 122-5087-0264
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1981. It incorporates a concrete block foundation and wood frame structural system. The first story is clad in brick veneer and the second story is clad in aluminum siding. There are two entrances on the first story façade. The entrances are accessed by brick stairs and compromised of single-leaf, wood, paneled doors surmounted by asphalt-shingled, shed roof overhangs. The building features aluminum, sliding windows. The windows on the first story have rowlock brick sills. Air conditioning units are mounted to the façade wall. The roof is side gable and clad in asphalt shingles. There are no openings on the east and west elevations.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **206 West 26th Street**
PROPERTY NAME: House, 206 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0265
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1906. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The south facade features a one-story, two-bay porch with an asphalt-shingled, hipped roof supported by vinyl-clad, square posts. The primary entrance is comprised of a single-leaf, metal, paneled door with an oval light surmounted by a transom. The house features 1/1, wood, double-hung sash windows with applied storm windows. The roof is

hipped-cross-gable clad in slate shingles. Within the front gable on the façade is vinyl siding and a modified Palladian window with a fixed window framed by two, trapezoid windows. The house features an interior, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **208 West 26th Street**
PROPERTY NAME: House, 208 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0266
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1906. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south facade features a one-story, two-bay porch with an asphalt-shingled, hipped roof supported by vinyl-clad, square posts. There is a metal, awning appended to the porch roof. The primary entrance is comprised of a single-leaf, wood, paneled door with a wrought iron, storm door surmounted by a transom. The house features 1/1, aluminum, double-hung sash windows with screens. The windows on the second story façade and west elevation are surmounted by metal awnings appended to the building. Both the porch and window awnings are painted with the letter "H". The roof is hipped-cross-gable clad in asphalt shingles. The front gable on the façade features a modified Palladian window with a fixed window surmounted by a metal awning and framed by two, trapezoid windows. The house features an interior, brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **210 West 26th Street**
PROPERTY NAME: House, 210 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1950
DHR NUMBER (S): 122-5087-0267
DESCRIPTION (S):
This is a one-story house designed in the Colonial Revival style and constructed in 1950. It incorporates a concrete block foundation and wood frame structural system clad in vinyl siding. The façade features a stoop covered with a metal awning supported by decorative, metal posts. The primary entrance is comprised of a single-leaf, wood, paneled door with a light and a storm door. The windows are 1/1, aluminum, double-hung sash surmounted by metal awnings. There is an enclosed porch on the southeast corner of the house. The roof is side gable and clad in asphalt shingles. The house features an interior, brick chimney with a corbelled cap. A carport with a flat roof supported by metal posts is appended to the east elevation.

- This is a one-story garage designed in the Colonial Revival style and constructed circa 1950. It incorporates a concrete foundation and wood frame structural system clad in vinyl siding. The garage features a roll-up, garage door. The roof is front gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **211 West 26th Street**
PROPERTY NAME: Apartment Building, 211 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1977
DHR NUMBER (S): 122-5087-0268
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1977. It incorporates a concrete block foundation and wood frame structural system. The first story is clad in brick veneer and the second story is clad in aluminum siding. There are two entrances on the north façade. The entrances are comprised of single-leaf, wood, doors surmounted by asphalt-shingled, shed roof overhangs. The building features aluminum, sliding windows. The windows on the first story have rowlock brick sills. Air-conditioning units are mounted on the façade. The roof is side gable and clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **216 West 26th Street**
PROPERTY NAME: House, 216 West 26th Street
OTHER NAME (S): Duplex, 216 West 26th Street
CONSTRUCTION DATE: 1898
DHR NUMBER (S): 122-5087-0269
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1898. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade is two bays, featuring a two-story canted bay on the east portion and an entrance on the west portion. The canted bay is articulated by an asphalt-shingled, octagonal roof. The primary entrance is comprised of a single-leaf, wood, paneled door with a fan-shaped light surmounted by a transom. A classical surround frames the door and transom with a pediment and pilasters. There is a one-story, two-bay porch with an asphalt-shingled, hipped roof on the east elevation. There is also a single-leaf, wood, paneled door on the east elevation. The house features 1/1, vinyl, double-hung sash windows. The roof is side gable with a boxed cornice and is clad in asphalt shingles. The cornice continues on the side elevations forming closed gables. There is a flat-roofed addition appended to the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **220 West 26th Street**
PROPERTY NAME: House, 220 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0270
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1906. It

incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south facade features a one-story, wrap around porch with a standing-seam metal, hipped roof supported by wood, Tuscan columns. The primary entrance is located on the façade, but has been placed on the west end of the south wall of the cross gable, which is set back from the front gable of the south façade. The house features 1/1, vinyl, double-hung sash windows with screens. The roof is cross-gable and clad in asphalt shingles. The front gable on the façade features gable returns and a fixed window. The house features an interior, parged brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **221 West 26th Street**
PROPERTY NAME: House, 221 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-0271
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1922. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. This house has been converted into a duplex. The north façade features two, single-leaf, metal, paneled doors with fan-shaped lights. There is a brick stoop with header brick details and brick stairs accessing the entrances. The stoop is the former porch of which only the foundation remains. The windows on the first story have been boarded. The second story windows are 6/1, wood, double-hung sash with storm windows. The roof is side gable with a low-pitched, closed gable on the façade and it is clad in asphalt shingles. There is a one-story ell appended to the south elevation of the house.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1930. It incorporates a concrete block foundation and wood frame structural system clad in vinyl siding. The garage features a roll-up, garage door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **222 West 26th Street**
PROPERTY NAME: House, 222 West 26th Street
OTHER NAME (S): Duplex, 222 West 26th Street
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-0272
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Queen Anne style and constructed in 1921. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The south façade features an incorporated, one-story, two-bay porch with a metal awning and clustered, wood, Tuscan columns resting on brick pedestals. The porch is incorporated under the main roof. The primary entrance is comprised of a single-leaf, wood, paneled door with a wrought iron, storm door. The façade features Queen Anne, paired, 1/1, wood, double-hung sash windows framed by non-functional, wood shutters. Other windows include two, fixed, 4-light, diamond-shaped windows and a fixed, Queen Anne window in the façade gable. The roof is

cross-gable with returns and is clad in slate shingles. The house features an interior, brick chimney with a corbelled cap on the west elevation.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1950. It incorporates a concrete block foundation and wood frame structural system clad in vinyl siding. The roof is side gable and clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **223 West 26th Street**
PROPERTY NAME: House, 223 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1999
DHR NUMBER (S): 122-5087-0273
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1999. The house exhibits Queen Anne motifs. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, shed roof supported by turned, wood posts. There is also a two-story, canted bay on the east end of the façade that is surmounted by a closed gable. The primary entrance is comprised of a single-leaf, wood, paneled door flanked by sidelights. The house features 6/6, aluminum, double-hung sash windows. The roof is side gable clad in asphalt shingles. There is a one-story garage appended to the west elevation of the house and it is recessed from the facade. The garage features a roll-up, garage door and an asphalt-shingled, side gable roof.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **224 West 26th Street**
PROPERTY NAME: House, 224 West 26th Street
OTHER NAME (S): Duplex, 224 West 26th Street
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-0274
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1905. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, wrap around porch with an asphalt-shingled, hipped roof supported by bracketed, turned, wood posts. The porch also features decorative woodwork, engaged porch posts and a replacement balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a fan-shaped light. The house features 1/1, aluminum, double-hung sash windows. The roof is cross-gable clad in asphalt shingles. There is an interior, parged, brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **229 West 26th Street**
PROPERTY NAME: House, 229 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: circa 2000
DHR NUMBER (S): 122-5087-0275
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed circa 2000. It incorporates a concrete block foundation clad in brick veneer and wood-frame structural system clad in vinyl siding. The north façade features a one-story, one-bay porch with an asphalt-shingled, shed roof supported by wood, Tuscan columns. There is also a two-story, gable-roofed, block that projects from the façade at the west end under the main roof. The primary entrance is comprised of a single-leaf, wood, paneled door framed by sidelights. The house features 6/6, aluminum, double-hung sash windows and 4/4, aluminum, double-hung sash windows. The roof is front gable and clad in asphalt shingles. There is a one-story garage appended to the west elevation of the house. The garage features a roll-up, garage door and an asphalt-shingled, side gable roof.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **231 West 26th Street**
PROPERTY NAME: House, 231 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0276
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1906. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch with a hipped roof and square, wood columns. The west portion of the porch has been screened. The primary entrance is comprised of a single-leaf, wood, paneled door with a storm door surmounted by a transom. The house features 2/2, wood, double-hung sash windows. The roof is gable clad in asphalt shingles. The roof cornice forms a closed gable on the façade which features a window opening that has been converted into a vent. The house also features two, interior, parged brick chimneys with corbelled caps.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **233 West 26th Street**
PROPERTY NAME: House, 233 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 2000
DHR NUMBER (S): 122-5087-0277
DESCRIPTION (S):
This resource is a two-story house designed in the Modern Movement style and constructed in 2000. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof and wood,

Tuscan columns. There is a two-story, canted bay on the east end of the façade that is surmounted by a gable within the main roof gable. The primary entrance is comprised of a single-leaf, wood, paneled door with a decorative light and a storm door flanked by sidelights. The house features 6/6, vinyl, double-hung sash windows. The roof is front gable clad in asphalt shingles. There is a one-story ell appended to the south elevation of the house.

- This is a one-story garage designed in the Modern Movement style and constructed circa 2000. It incorporates a concrete foundation and wood frame structural system clad in vinyl siding. The façade features a roll-up garage door.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **236 West 26th Street**
PROPERTY NAME: House, 236 West 26th Street
OTHER NAME (S): Duplex, 236 West 26th Street
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-0278
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1907. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The first story of the façade is clad in stone veneer. The south façade features a one-story, two-bay porch with battered piers and a replacement balustrade. There are two entrances on the first story façade. Both entrances are comprised of single-leaf, metal, paneled doors with 9 lights. There is a similar door accessing the second story balcony formed by the porch roof. The house features replacement, 1/1, aluminum, double-hung sash windows. Within the façade gable are fishscale, wood shingles and a paired, 6/6, wood, double-hung sash window. The roof is front gable clad in asphalt shingles. There are intersecting gables on the east and west elevations. The house features a boxed cornice and an interior, brick chimney. There is also a wood staircase appended to the southwest corner of the house.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **237 West 26th Street**
PROPERTY NAME: House, 237 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: circa 1920
DHR NUMBER (S): 122-5087-0279
DESCRIPTION (S):
This is a one-story Bungalow constructed circa 1920. It incorporates a brick foundation and wood frame structural system clad in wood shingles. The façade features a one-story, two-bay porch that has been partially screened. The porch has wood, square columns on rusticated stone piers and a shingled balustrade. The primary entrance is comprised of a single-leaf, wood door with a metal, storm door. The house features 6/6, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles with visible, wood rafters under the eaves. There is a hipped-roof dormer on the façade featuring a grouping of 4-light,

wood, casement windows. The house features an exterior, brick chimney on the east elevation and a projecting, intersecting gable on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **238 West 26th Street**
PROPERTY NAME: House, 238 West 26th Street
OTHER NAME (S): Duplex, 238 West 26th Street
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0280
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1906. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; cornice; turned balusters; and Tuscan columns. There are two entrances on the façade comprised of single-leaf, wood doors with 9-lights and metal, storm doors. The east entrance is surmounted by a boarded transom. There is a canted bay on the second story façade. The windows are 1/1, wood, double-hung sash. The roof is front gable clad in asphalt shingles and features a boxed cornice. The closed gable on the façade is clad in fishscale, wood shingles. There are also intersecting gables on the east and west elevations with fishscale, wood shingles. There is an interior, brick chimney with a corbelled cap. A wood ramp has been appended to the east elevation of the house. There is a two-story canted bay on the west elevation surmounted by the intersecting gable on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **241 West 26th Street**
PROPERTY NAME: House, 241 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0281
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1910. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; square, wood posts; and a replacement balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light. The windows are 1/1, wood, double-hung sash with storm windows. Some of the window openings are covered with siding. The roof is front gable clad in asphalt shingles and features a boxed cornice. The house features two, interior, brick chimneys on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **247 West 26th Street**
PROPERTY NAME: Apartment Building, 247 West 26th Street
OTHER NAME (S):

CONSTRUCTION DATE: 1967
DHR NUMBER (S): 122-5087-0282
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1967. It incorporates a concrete block foundation and concrete block, masonry structural system clad in brick veneer. The primary entrance is a single-leaf, metal, paneled door. The building features vinyl, sliding windows with rowlock brick sills. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **249 West 26th Street**
PROPERTY NAME: House, 249 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0283
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1912. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof and replacement, square, wood posts. There is a post missing on the northeast corner of the porch. The entrance has been boarded with plywood. There is a canted bay surmounted by a gable on the second story of the west portion of the façade. The window openings on the façade are 1/1, wood, double-hung sash. Most windows have been covered with plywood. The roof is hipped-cross-gable clad in slate shingles. There is a two-story canted bay on the west elevation surmounted by a gable. The house features an interior, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **301 West 26th Street**
PROPERTY NAME: House, 301 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0284
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1906. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof. The porch has been enclosed and clad in vinyl siding. The Tuscan column porch supports are still visible. Six-light, casement windows punctuate the enclosed porch walls. The entrance is a single-leaf, wood door with a wrought iron, storm door. There is a canted bay on the second story of the east portion of the façade. The window are 1/1, wood, double-hung sash framed by non-functional shutters. The roof is front gable clad in asphalt shingles. The closed gable on the façade features a Palladian window containing an arched, 1/1, wood window, flanked by 1/1, wood, Queen Anne windows. There are intersecting gables on the east and west elevations of the house. The intersecting

gable on the east elevation features a 1/1, wood, double-hung sash, Queen Anne window. The house features two, interior, brick chimneys with corbelled caps. There is a one-story, back porch with a metal awning located on the southeast corner of the house.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **306 West 26th Street**
PROPERTY NAME: Apartment Building, 306 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1985
DHR NUMBER (S): 122-5087-0285
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1985. It incorporates a concrete block foundation and wood frame structural system. The south facade is clad in brick veneer and the east and west elevations are clad in vinyl siding. There are four apartment units in the building. Each unit has an entrance comprised of a single-leaf, metal, paneled door with a metal, storm door. There is a wood staircase appended to the façade to access the second story apartment units. The building features paired, 1/1, aluminum, double-hung sash windows with rowlock brick sills. Air-conditioning units are mounted to the façade. The roof is side gable with a wide eave on the south façade. The roof is clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **307 West 26th Street**
PROPERTY NAME: House, 307 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-0286
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1907. It incorporates a brick foundation and wood frame structural system clad in asbestos and vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof, a boxed cornice and replacement, square, wood posts. The primary entrance is comprised of a single-leaf, wood door with a metal, storm door surmounted by a transom. There is a two-story, canted bay on the west portion of the façade. The windows on the façade are 1/1, vinyl, double-hung sash. The roof is front gable clad in asphalt shingles. The closed gable on the façade extends over the canted bay and exhibits elongated modillions adjacent to the canted bay. The closed gable features a multiple-light, fixed, wood window.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **309 West 26th Street**
PROPERTY NAME: House, 309 West 26th Street
OTHER NAME (S): Duplex, 309 West 26th Street
CONSTRUCTION DATE: 1905

DHR NUMBER (S): 122-5087-0287
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1905. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a replacement balustrade; and Tuscan, wood columns. The primary entrance is comprised of a single-leaf, wood door surmounted by a boarded transom. There is a canted bay surmounted by a gable on the second story of the east portion of the façade. There are wood, double-hung sash, Queen Anne windows on the first story facade. The window openings on the second story of the façade are 1/1, wood, double-hung sash with storm windows. The roof is side gable clad in asphalt shingles and has returns at the gable ends. The gable on the façade is clad in decorative-cut weatherboard with a scalloped motif and features paired, wood, diamond-paned windows. The house features an interior, brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **310 West 26th Street**
PROPERTY NAME: House, 310 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0288
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1912. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof, replacement balustrade and replacement, square, wood posts. The primary entrance is comprised of a single-leaf, wood, paneled door. The windows are 6/6, vinyl, double-hung sash. The roof is hipped clad in asphalt shingles. There are intersecting gables on the façade, and the east and west elevations. The intersecting gables are clad in wood, fishscale shingles and feature window openings. This house is currently undergoing a renovation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **311 West 26th Street**
PROPERTY NAME: House, 311 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1923
DHR NUMBER (S): 122-5087-0289
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1923. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof and visible, wood rafters under the eaves. The porch is clad in asbestos siding that forms jack arched openings. The primary entrance is comprised of a single-leaf, wood, paneled door with lights and a wood, storm door. The windows are 1/1, wood, double-hung sash with storm windows. The roof is hipped clad in asphalt shingles with visible, wood rafters. There is a gabled dormer

on the façade that exhibits paired, 6-light, wood windows and exposed, wood rafters under the eaves. The house features an exterior, chimney with a corbelled cap. The chimney is brick below the roofline and parged brick above the roofline.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **312 West 26th Street**
PROPERTY NAME: House, 312 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-0290
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1907. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof and replacement, square, wood posts. The porch balustrade is missing. The entrance is comprised of a single-leaf, wood, paneled door surmounted a transom. There is a two-story, canted bay surmounted by an intersecting gable on the east portion of the façade. The windows on the façade are 1/1, wood, double-hung sash with metal storm windows. The roof is hipped-cross-gable clad in asphalt shingles. The intersecting gable on the façade features an aluminum, sliding window and cornice. The house features an interior, parged brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **314 West 26th Street**
PROPERTY NAME: House, 314 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-0291
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1916. It incorporates a brick foundation and wood frame structural system clad in asphalt shingles. The first story of the south façade features a one-story, three-bay porch with replacement, square, wood posts and a concrete block foundation. The porch is incorporated under the main roofline. The primary entrance is comprised of a single-leaf, wood door with 12 lights and a wood, screen door surmounted by a boarded transom. The first story façade also features paired, 12/1, wood, double-hung sash windows. The second story of the façade features a standing-steam metal, shed-roofed dormer. Within the dormer is an open porch, which has been partially enclosed on the east end. The second-story porch features wood posts and visible, wood rafters. There is a single-leaf, wood door with diamond-shaped lights and a screen door accessing the second story porch. There are 6/1 and 9/1, wood, double-hung sash windows on the second story of the façade. The roof is side gable with visible, wood rafters on the south façade above the first-story porch. The roof is clad in asphalt shingles. The house features two, interior, parged brick chimneys.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **315 West 26th Street**
PROPERTY NAME: House, 315 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0292
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1912. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, shed roof, replacement balustrade and replacement, square, wood posts. The primary entrance is comprised of a single-leaf, wood door surmounted by a transom. The façade features 1/1, wood, double-hung sash windows. The roof is hipped and clad in asphalt-shingled. There is a hipped-roof dormer on the façade that has been parged. The house features an interior, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **316 West 26th Street**
PROPERTY NAME: House, 316 West 26th Street
OTHER NAME (S): Duplex, 316 West 26th Street
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-0293
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1916. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The first story of the south façade features a one-story, two-bay porch with battered, wood piers on brick pedestals and a brick foundation. The primary entrance is comprised of a single-leaf, wood door and a metal, storm door surmounted by a 3-light transom and flanked by boarded sidelights. The first story façade also features paired, 12/1, wood, double-hung sash windows framed by non-functional shutters. The second story of the façade features an asphalt-shingled, shed-roofed dormer that shelters a second-story porch. The second-story porch features paired, wood posts. There is a single-leaf, wood door with lights accessing the second story porch. There 9/1, wood, double-hung sash windows on the second story facade. The roof is side gable clad in asphalt shingles. The house features an interior, brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **317 West 26th Street**
PROPERTY NAME: House, 317 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-0294
DESCRIPTION (S):

This is a two-and-one-half-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1916. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof with wide eaves and square, wood posts. The primary entrance is comprised of a single-leaf, wood door and a metal, screen door. The first-story façade features 1/1, wood, double-hung sash windows. The second-story façade features a window grouping of a fixed, 1-light, wood window framed by 1/1, wood, double-hung sash windows. The roof is hipped and clad in asphalt shingles. There are hipped-roof dormers on the façade, and the east and west elevations of the house. The dormer on the façade features paired, 1/1, vinyl, double-hung sash windows. The house features an interior, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **318 West 26th Street**
PROPERTY NAME: House, 318 West 26th Street
OTHER NAME (S): Apartment Building, 318 West 26th Street
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-0295
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1905. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The south façade features a one-story, two-bay porch with a hipped roof; a dentiled cornice; Tuscan, wood columns; and turned balusters. The primary entrance is comprised of a single-leaf, wood door surmounted by a transom. There is a two-story, canted bay on the east portion of the façade. The façade windows are 1/1, wood, double-hung sash. The roof is front gable clad in slate shingles. The roof features a boxed cornice and bracket under the eaves on the façade. There is an intersecting gable on the west elevation and a hip-roofed dormer on the east elevation. There is a pent roof within the closed gable on the façade. The façade gable features paired, 2/2, wood, double-hung sash windows. The house features two, interior, brick chimneys. The chimney on the east elevation features a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **319 West 26th Street**
PROPERTY NAME: House, 319 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-0296
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1914. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; a cornice; a replacement balustrade; and replacement, square, wood posts. The primary entrance is comprised of a single-leaf, wood door and a screen door. The façade features 1/1, wood, double-hung sash windows. The roof is

hipped and clad in asphalt shingles. There is a hipped-roof dormer on the façade that has a boarded window opening. The house features an interior, brick chimney with a corbelled cap. There is a one-story ell appended to the south elevation of the house.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **321 West 26th Street**
PROPERTY NAME: Apartment Building, 321 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1965
DHR NUMBER (S): 122-5087-0297
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1965. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system. The first story is clad in brick veneer and the second story is clad in aluminum siding. There is a soldier brick stringcourse between the first and second stories. The building is accessed by brick stairs with a wrought iron balustrade. The entrance is comprised of a single-leaf, wood door with a diamond-shaped light and a wrought iron, storm door. The façade features paired, 1/1, metal, double-hung sash windows. The windows on the first story have rowlock brick sills and the windows on the second story are flanked by non-functional shutters. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **326 West 26th Street**
PROPERTY NAME: House, 326 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1948
DHR NUMBER (S): 122-5087-0298
DESCRIPTION (S):
This is a one-story house designed in the Colonial Revival style constructed in 1948. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The house occupies a T-shaped footprint on the property. The south façade features a one-story, one-bay porch with a front gable roof supported by turned, wood posts. The primary entrance is comprised of a single-leaf, wood, paneled door and a metal, screen door. There are individual and paired, 6/6, wood, double-hung sash windows. The roof is cross gable and clad in asphalt shingles. There is a porch on the northwest corner of the house. The house features a central, interior, brick chimney with a cap.

- This is a one-and-one-half-car garage constructed circa 1980. It has a poured concrete foundation and a wood frame structural system clad in vinyl siding. There is a metal, paneled, roll-up garage door on the façade. The roof is side gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **400 West 26th Street**
PROPERTY NAME: Apartment Building, 400 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1969
DHR NUMBER (S): 122-5087-0299
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1969. It incorporates a concrete block foundation and a concrete block structural system clad in brick veneer. The building is not oriented to the street and faces east. The entrance is comprised of a single-leaf, metal, paneled door. The building features metal, sliding windows of varying sizes with rowlock brick sills. The roof is side gable with wide eaves and is clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **404 West 26th Street**
PROPERTY NAME: Apartment Building, 404 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1987
DHR NUMBER (S): 122-5087-0300
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1987. It incorporates a concrete block foundation and a concrete block structural system clad in brick veneer. The south façade features three door openings surmounted by wood cornices and flanked by pilasters. The entrances are comprised of single-leaf, metal, paneled doors with metal, screen doors. The central entrance does not have a screen door. The 6/6, metal, double-hung sash windows with rowlock brick sills are flanked by non-functional shutters. The roof is side gable clad in asphalt shingles. There is a rowlock brick course below the cornice on the façade.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **409 West 26th Street**
PROPERTY NAME: House, 409 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1909
DHR NUMBER (S): 122-5087-0301
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1909. It incorporates a parged brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch with battered, wood piers on parged brick pedestals. The porch is incorporated under the main roof and has been enclosed with screens and wood lattice. The porch entrance is comprised of a single-leaf, wood lattice door. The north façade also features a shed-roofed dormer with 1/1, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles.

There is a one-story canted bay and an octagonal, wood window on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **410 West 26th Street**
PROPERTY NAME: Apartment Building, 410 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1987
DHR NUMBER (S): 122-5087-0302
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1987. It incorporates a concrete block foundation and a wood frame structural system clad in vinyl siding. The south façade features three door openings on the first story and two door openings on the second story. These entrances are comprised of single-leaf, metal, paneled doors with metal, 2-light, storm doors. The first story, central entrance does not have a storm door. The second story entrances are accessed by a wood staircase appended to the façade. The building features 6/6, metal, double-hung sash windows flanked by non-functional shutters. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **411 West 26th Street**
PROPERTY NAME: House, 411 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1909
DHR NUMBER (S): 122-5087-0303
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1909. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with square, wood columns on brick pedestals. The porch is incorporated under the main roof. The primary entrance is comprised of a single-leaf, wood door and metal, screen door flanked by sidelights and surmounted by a 3-light transom. The first story façade window grouping contains a single-light, vinyl window flanked by 1/1, vinyl, double-hung sash windows. The north façade also features a shed-roofed dormer that has been partially enclosed on the east end and a porch on the west end. The second-story porch has been enclosed with screen and features paired, wood posts. There is also a 1/1, vinyl, double-hung sash window in the dormer. The roof is side gable clad in asphalt shingles. There is a canted bay on the west elevation and a one-story ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **412 West 26th Street**
PROPERTY NAME: House, 412 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919

DHR NUMBER (S): 122-5087-0304
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1919. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features an enclosed, one-story, two-bay porch with an asphalt-shingled, hipped roof and wood, Tuscan columns. The porch is clad in vinyl siding and features a single-leaf, screen door entrance and 1/1, metal, double-hung sash windows. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles. There is an interior, partially-parged, brick chimney with a corbelled cap.

- This is a one-story, flat-roof shed. It was constructed circa 1920. It is clad in vinyl siding and features screened window openings.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **415 West 26th Street**
PROPERTY NAME: House, 415 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0305
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1918. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The first story façade is clad in faux-stone siding. The north façade features a one-story, two-bay porch with paneled, wood posts on brick pedestals and turned posts on the balusters. The porch has both a front and side entrance and is incorporated under the main roof. The primary entrance to the house is comprised of a single-leaf, wood door with 9 lights. The house features 6/6, metal, double-hung sash windows. The roof is cross-gable clad in asphalt shingles. The gable ends feature brackets clad in vinyl siding and 6-light, wood, fixed windows. There is a projecting, side-gable-roofed bay on the west elevation that features a single-leaf, wood door with a light and a screen door. There is also a one-story, cross-gable-roofed ell appended to the east elevation. The ell features a concrete block foundation and 2/2, metal, double-hung sash windows.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **418 West 26th Street**
PROPERTY NAME: House, 418 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1941
DHR NUMBER (S): 122-5087-0306
DESCRIPTION (S):
This one-story Bungalow was constructed in 1941. It incorporates a parged, concrete block foundation and wood frame structural system clad in asbestos siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof with visible, wood rafters and replacement, wrought-iron posts and balustrade.

The primary entrance is comprised of a single-leaf, wood door with lights and a metal, screen door with a light. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is front gable clad in asphalt shingles with visible, wood rafters. The house features an interior, brick chimney.

- This is a one-story shed constructed circa 1940. It incorporates a wood frame structural system clad in wood siding. It features a double-leaf, wood door and a front-gable roof clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **420 West 26th Street**
PROPERTY NAME: House, 420 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1941
DHR NUMBER (S): 122-5087-0307
DESCRIPTION (S):
This one-story Bungalow was constructed in 1941. It incorporates a parged, concrete block foundation and wood frame structural system clad in aluminum siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, front-gable roof and turned, wood posts and balustrade. The primary entrance is comprised of a single-leaf, wood door with lights and a metal, screen door. The façade features a window grouping of a fixed, single-light, wood window flanked by 1/1, wood double-hung sash windows. The house features 6/1, wood, double-hung sash windows with storm windows. The roof is front gable clad in asphalt shingles.

- This is a one-story shed constructed circa 1960. It incorporates a wood frame structural system clad in aluminum siding. The roof is front gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **424 West 26th Street**
PROPERTY NAME: House, 424 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1941
DHR NUMBER (S): 122-5087-0308
DESCRIPTION (S):
This one-story Bungalow was constructed in 1941. It incorporates a concrete block foundation and wood frame structural system clad in asbestos siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof with visible, wood rafters and battered, wood piers. There is a metal awning applied to the porch roof. The primary entrance is comprised of a single-leaf, wood door and a decorative metal, storm door. The house features 6/1, wood, double-hung sash windows. The roof is front gable clad in asphalt shingles. There is an interior, parged, brick chimney with a metal cap. There is a one-story porch appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **425 West 26th Street**
PROPERTY NAME: House, 425 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1941
DHR NUMBER (S): 122-5087-0309
DESCRIPTION (S):
This one-story Bungalow was constructed in 1941. It incorporates a concrete block foundation and wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, front-gable roof with visible, wood rafters, and metal posts. The porch has a concrete floor and no balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with six lights and a single-light, storm door. The house features 6/1, wood, double-hung sash windows with storm windows. There is a one-story, side-gable-roofed ell appended to the west elevation. The roof is front gable clad in asphalt shingles with visible, wood rafters. There is an interior, brick chimney with a metal cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **426 West 26th Street**
PROPERTY NAME: House, 426 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1941
DHR NUMBER (S): 122-5087-0310
DESCRIPTION (S):
This one-story Bungalow was constructed in 1941. It incorporates a concrete block foundation and wood frame structural system clad in aluminum siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, front-gable roof; a metal awning; battered, wood piers; and turned balusters. The primary entrance is comprised of a single-leaf, wood door and a metal, storm door. The house features 6/1, wood, double-hung sash windows. The windows on the facade are flanked by non-functional shutters. The roof is front gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **432 West 26th Street**
PROPERTY NAME: House, 432 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0311
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1912. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a boxed cornice; and Tuscan, wood columns. The primary entrance is comprised of a single-leaf, metal, paneled door with two, trapezoid-shaped

lights with metal details. The façade features 6/6, aluminum, double-hung sash windows. The roof is cross-gable with boxed cornices and cornice returns. It is clad in asphalt shingles. The gable ends are clad in wood, fishscale shingles and feature 6/6, aluminum, double-hung sash windows. The house features an interior, brick chimney with a metal cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **434 West 26th Street**
PROPERTY NAME: House, 434 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1968
DHR NUMBER (S): 122-5087-0312
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1968. It incorporates a concrete block foundation and wood frame structural system. The first story is clad in brick veneer and the second story is clad in vinyl siding. The south façade features a one-story, projecting, front-gable-roofed block with a recessed, one-bay, incorporated porch and metal balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with four lights and a 2-light storm door. The building features 1/1, aluminum, double-hung sash windows. The windows on the first story feature rowlock brick sills. The roof is front gable and clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **511 West 26th Street**
PROPERTY NAME: House, 511 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1888
DHR NUMBER (S): 122-5087-0313
DESCRIPTION (S):
This is a one-story house designed in the Queen Anne style and constructed in 1888. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The east elevation features a one-story, two-bay porch with an asphalt-shingled, hipped roof and wood posts. The porch exhibits Tuscan columns and engaged columns. The entrances are single-leaf, wood, paneled doors with metal storm doors. The house features 2/2, aluminum, double-hung sash windows. On the south and east elevations are window groupings of single-light, aluminum windows flanked by 2/2, aluminum, double-hung sash windows. The roof is deck-on-hip clad in asphalt shingles. There is an intersecting gable on the north elevation at the west corner. There is a one-story, shed-roofed ell on the west elevation. The house features an interior, parged, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **515 West 26th Street**
PROPERTY NAME: House, 515 West 26th Street

OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-0314
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1915. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The first story façade is clad in brick veneer. The north façade features an incorporated, one-story, two-bay porch with battered, wood piers on brick pedestals and a brick balustrade with open brickwork and rowlock brick details. The second story of the façade is an enclosed porch clad in aluminum siding. The primary entrance is comprised of a single-leaf, wood, paneled door with a metal storm door surmounted by a transom. The entrance is flanked by sidelights that are covered with metal details. The first story features 1/1, wood, double-hung sash windows with rowlock brick sills. The second story façade features 2/2, aluminum, double-hung sash windows. The roof is side-gable clad in slate shingles. The house features an interior, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **517 West 26th Street**
PROPERTY NAME: House, 517 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-0315
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1915. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features an incorporated, one-story, three-bay porch with Tuscan, wood columns, turned newels and square balusters. On the second story of the façade is an enclosed second-story porch. This porch is clad in vinyl siding and features 6-light, aluminum, sliding windows with screens. The primary entrance is comprised of a single-leaf, wood, paneled door with a metal storm door. The first story façade features a window grouping of a 9/9, aluminum, double-hung sash window flanked by 6/6, aluminum, double-hung sash windows. The elevations feature 6/6, aluminum, double-hung sash windows. The roof is side-gable clad in asphalt shingles. An interior, brick chimney with a corbelled cap is located near the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **522 West 26th Street**
PROPERTY NAME: House, 522 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-0316
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1922. It incorporates a brick

foundation and wood frame structural system clad in aluminum siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, gable roof; a boxed cornice; and cornice returns. The porch posts are battered and clad in aluminum siding. The primary entrance is comprised of a single-leaf, wood, paneled door with lights and a storm door. The house features 1/1, aluminum, double-hung sash windows. The roof is hipped clad in asphalt shingles. There is a gable dormer on the south façade that features paired louvered vents and a boxed cornice with cornice returns. The house features an exterior brick chimney on the east elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1925. It incorporates a wood frame structural system clad in aluminum siding. The façade features a roll-up garage door and a single-leaf door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **524 West 26th Street**
PROPERTY NAME: House, 524 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-0317
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features an incorporated, one-story, two-bay porch with an asphalt-shingled, hipped roof and square, wood posts. The porch foundation is parged brick and the porch balustrade is wrought iron. The second story of the south façade is an enclosed porch clad in vinyl siding. The primary entrance is comprised of a single-leaf, wood, paneled door and a metal, storm door. The transom and sidelights have been clad in vinyl siding. The house features 1/1, aluminum, double-hung sash windows. The roof is side gable clad in asphalt shingles and exhibits wide eaves.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **525 West 26th Street**
PROPERTY NAME: Duplex, 525 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0318
DESCRIPTION (S):
This is a two-story duplex designed in the Craftsman style and constructed in 1919. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a two-story, two-bay porch with an asphalt-shingled, gable roof with wide eaves and brackets. The porch posts and balustrade are replacements. There are three door openings on the south façade. On the west end of the first story is a single-leaf, wood, paneled door surmounted by a gable roof overhang with vinyl brackets. The door the east end of the first-story is single-leaf, wood with fifteen lights. The second story door opening to the porch is

comprised of a single-leaf, wood paneled door with a metal, screen door. The building features 6/6, wood, double-hung sash windows and 1/1, metal, double-hung sash windows. The roof is a gable clad in slate shingles with wide eaves and vinyl brackets. The house features an interior, brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **526 West 26th Street**
PROPERTY NAME: House, 526 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-0319
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features an incorporated, one-story, two-bay porch with an asphalt-shingled, hipped roof; and battered wood piers on stuccoed, brick pedestals. The porch foundation is stuccoed brick and the porch balustrade is wood. The second story of the south façade is an enclosed porch clad in vinyl siding. The primary entrance is comprised of a single-leaf, wood, paneled door with a fan-shaped light and a metal, storm door flanked by sidelights. The house features 1/1, aluminum, double-hung sash windows. The roof is side gable clad in asphalt shingles and exhibits wide eaves on the east and west elevations.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **527 West 26th Street**
PROPERTY NAME: House, 527 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-0320
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1914. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a boxed cornice; battered, wood piers on brick pedestals; and turned balusters. The primary entrance is comprised of a single-leaf, wood, paneled door with a stained glass light surmounted by a transom. There is a two-story canted bay on the west end of the façade surmounted by a closed gable. The closed gable on the façade features a 1/1, wood, double-hung sash window and spindlework under the eaves. The house features 1/1, vinyl, double-hung sash windows. The roof is hipped clad in slate shingles. The house features an interior, brick chimney with a corbelled cap. There is a one-story porch appended to the south elevation that features turned, wood posts.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **530 West 26th Street**

PROPERTY NAME: House, 530 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-0321
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1915. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features one-story, two-bay porch with an asphalt-shingled, hipped roof, square, wood columns; a wood balustrade; and a metal awning. The primary entrance is comprised of a single-leaf, wood door with a metal, storm door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is cross-gable and clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **531 West 26th Street**
PROPERTY NAME: House, 531 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-0322
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Craftsman style and constructed in 1915. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch has battered, wood piers resting on brick pedestals, and a replacement balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with two lights and a metal, storm door flanked by sidelights. The half story of the south façade features a shed-roofed dormer sheltering a one-bay porch with paired, wood posts. There is a single-leaf, wood, paneled door with lights and a metal, storm door accessing the second story porch. The house features single and paired 6/1, wood, double-hung sash windows. The first story windows are flanked by non-functional shutters. The roof is side gable clad in asphalt shingles and exhibits wide eaves. The house features an exterior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **535 West 26th Street**
PROPERTY NAME: House, 535 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0323
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features an incorporated, one-story, two-bay porch under the main roof. The porch has battered, wood piers clad in asbestos siding atop

brick pedestals and a replacement balustrade. The second story of the north façade is comprised of an enclosed porch clad in vinyl siding punctuated by 6/6, aluminum, double-hung sash windows. The primary entrance is comprised of a single-leaf, metal, paneled door with a metal, screen door flanked by sidelights that have been filled with paneled wood. The house features paired, 1/1 and 6/6, aluminum, double-hung sash windows. The roof is side gable clad in asphalt shingles and there is an interior, brick chimney with a concrete cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **600 West 26th Street**
PROPERTY NAME: House, 600 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-0324
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1916. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a boxed cornice; parged brick foundation; wood, Tuscan columns; and a replacement balustrade. The primary entrance is comprised of a single-leaf, metal door with nine lights surmounted by a transom. The house features single and paired, 1/1, wood windows with storm windows. The windows on the south façade are flanked by non-functional shutters. The roof is gable clad in asphalt shingles with shed-roofed dormers on the east and west elevations. The gable is closed on the south façade.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **603 West 26th Street**
PROPERTY NAME: House, 603 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0325
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1919. It incorporates a brick foundation and wood frame structural system. The first story is clad in vinyl siding and the second story is clad in wood shingles. The base of the house is stuccoed. The north façade is two bays and features a one-story, two-bay porch with wood, square posts and an asphalt-shingled, shed roof. The closed balustrade of the house has been treated with stucco. The primary entrance is comprised of a single-leaf, wood door and an aluminum, screen door. The house has 6/1, wood, double-hung sash windows. The roof is front gable clad in asphalt shingles. The house has an interior, parged chimney. There is a one-story, flat-roofed ell appended to the south elevation of the house.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **604 West 26th Street**

PROPERTY NAME: House, 604 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0326
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1906. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a replacement open porch with a wood balustrade and newels. The primary entrance is located on the west end of the façade in the first story of the tower nestled into the northwest corner of the two intersecting building masses. The entrance is comprised of a single-leaf, metal, paneled door. The façade features single and paired, 1/1, wood, double-hung sash windows of varying sizes. The roof is cross-gable clad in asphalt shingles. The gables feature boxed cornices and cornice returns. There is a pyramidal roof on the tower. There is a one-story, canted bay on the first-story of the west elevation and one-story ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **607 West 26th Street**
PROPERTY NAME: House, 607 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1966
DHR NUMBER (S): 122-5087-0327
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1966. It incorporates a concrete block foundation and a wood frame structural system. The first story façade is clad in brick veneer. The second story façade and side elevations are clad in asbestos siding. The primary entrance is comprised of a single-leaf, wood, paneled door with nine lights and an aluminum storm door with a light. The windows are paired, 2/2, metal, double-hung sash with screens and non-functional shutters. The roof is front gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **609 West 26th Street**
PROPERTY NAME: House, 609 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1913
DHR NUMBER (S): 122-5087-0328
DESCRIPTION (S):
This is two-and-one-half-story house designed in the Queen Anne style and constructed in 1913. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a two-story, canted bay and a one-story, two-bay porch. The porch has Tuscan columns, turned balusters, a dentiled cornice, and a hipped roof clad in asphalt shingles. The brick foundation of the porch has been parged. The primary entrance is comprised of a single-leaf, wood, paneled door with twelve lights surmounted by a

transom. The house features 1/1, wood, double-hung sash windows with metal screens. The roof is gabled and clad in asphalt shingles. The gable on the façade is closed with an asphalt-shingled, pent roof and a paired window. Under the façade eaves, at the building's corners and framing the canted bay, are elongated brackets. The house features an interior, brick chimney with a corbelled cap and a one-story, flat-roofed ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **611 West 26th Street**
PROPERTY NAME: House, 611 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1949
DHR NUMBER (S): 122-5087-0329
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1949. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The primary entrance is comprised of a single-leaf, wood, paneled door and metal, storm door with a light. The entrance is surmounted by a metal awning supported by a metal post with a metal balustrade. The windows on the façade are 8/8, wood, double-hung, sash with storm windows framed by non-functional shutters. The roof is side gable clad in asphalt shingles. The house features an interior, metal chimney with a cap.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1950. It incorporates a concrete slab foundation and wood frame structural system clad in asbestos siding. The garage features a wood, paneled, roll-up garage door and a front gable roof clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **616 West 26th Street**
PROPERTY NAME: House, 616 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1951
DHR NUMBER (S): 122-5087-0330
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1951. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story porch surmounted by an asphalt-shingled, gable roof. The porch features turned, wood posts; balusters; and newels. The primary entrance is comprised of a single-leaf, metal, paneled door with a metal storm door and a classical door surround exhibiting fluted pilasters supporting a cornice. The house features single and paired, 1/1, vinyl, double-hung sash windows with storm windows flanked by non-functional shutters. The roof is side gable clad in asphalt shingles. The house features an interior, brick chimney with a corbelled cap.

- This is a one-story, one-car garage designed in the Modern Movement style and constructed circa 1951. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. It features a

roll-up, metal garage door on the east elevation and a 1/1, metal, double-hung sash window on the south elevation. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **617 West 26th Street**
PROPERTY NAME: House, 617 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-0331
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1922. It reflects a typical Craftsman foursquare form. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch. The porch has battered, wood piers resting on parged, brick pedestals and an asphalt-shingled, front-gabled roof with wide eaves. The primary entrance is comprised on a single-leaf, wood door and a storm door with a light. The house features 1/1, wood, double-hung sash windows with metal screens. Some windows are replaced with 6/6, metal, double-hung sash windows. The roof is hipped with wide eaves and is clad in asphalt shingles. There is a front gable dormer on the façade that features an 8-light, wood, casement window. The house features an interior, brick chimney with a corbelled cap and an exterior, brick chimney with a corbelled cap.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1970. It incorporates a concrete slab foundation and concrete block structural system. The shed features a double-leaf, wood door and a front gable roof clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **621 West 26th Street**
PROPERTY NAME: House, 621 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1923
DHR NUMBER (S): 122-5087-0332
DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1923. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The primary entrance is a single-leaf, wood, paneled door with a light. The north façade features a one-story porch with paneled, wood piers on brick pedestals and a side entrance. The first story façade windows are paired, 1/1, wood, double-hung sash with metal storm windows. There is a gable dormer on the façade that features paired, wood, 6-light, casement windows with storm windows. The roof is side gable with wide eaves and is clad in asphalt shingles. The house features an exterior, brick chimney with a corbelled cap on the west elevation. There is also a one-story porch on the south elevation of the house under the main roofline.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **625 West 26th Street**
PROPERTY NAME: House, 625 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1928
DHR NUMBER (S): 122-5087-0333
DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1928. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The primary entrance is a single-leaf, wood, paneled door. The north façade features a one-story, three-bay porch with paneled, wood piers on brick pedestals; a wrought iron balustrade; and a central entrance. The first story façade windows are 1/1, aluminum, double-hung sash with metal screens. There is a gable dormer on the façade that features a window grouping of three, 3-light, fixed, wood windows. The first story windows on the west elevation are surmounted by metal awnings. There is a squared, projecting bay on the west elevation that features an asphalt-shingled, shed roof. There is also a one-story porch on the south elevation of the house incorporated under the main roof. The roof is side gable with wide eaves and is clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **629 West 26th Street**
PROPERTY NAME: Apartment Building, 629 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1983
DHR NUMBER (S): 122-5087-0334
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1983. It incorporates a concrete foundation and wood frame structural system. The first story is clad in brick veneer and the second story is clad in vinyl siding. The apartment building features two units on each story. Each unit has a single-leaf, metal, paneled door and storm door. The windows on the façade are 6/6, metal, double-hung sash. There is a wood staircase accessing the second story apartment units, appended to the north façade of the building. The roof is side gable and is clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **631 West 26th Street**
PROPERTY NAME: House, 631 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-0335
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1922. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding.

The north façade features a two-bay façade with a one-story, two-bay porch. The porch is comprised of battered, wood piers supporting an asphalt-shingled, gable roof with wide eaves and brackets. The primary entrance is comprised of a single-leaf, wood door with three, diamond-shaped lights and a storm door with a light. The house features 6/1, wood, double-hung sash windows with metal storm windows. The roof is gable clad in asphalt shingles. There are brackets under the eaves on the façade and there is a 6-light, wood window in the gable on the façade. The house features two, interior, brick chimneys with corbelled caps. There is a one-story ell appended to the south elevation of the house.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **635 West 26th Street**
PROPERTY NAME: Apartment Building, 635 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1967
DHR NUMBER (S): 122-5087-0336
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1967. It incorporates a concrete foundation and a concrete block structural system clad in brick veneer. The entrances are located on the east and west elevations. The building features metal, sliding windows with brick, rowlock sills surmounted by metal awnings. The roof is side gable and is clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **639 West 26th Street**
PROPERTY NAME: House, 639 West 26th Street
OTHER NAME (S): Duplex, 639 West 26th Street
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0337
DESCRIPTION (S):
This resource is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and wood frame structural system clad in weatherboard and vinyl siding. The north façade features a canted bay on the west end. The canted bay features 1/1, wood, double-hung sash windows. There is a one-story, wrap-around porch on the north façade and east elevation that rests on a brick pier foundation. The porch features wrought iron posts on brick pedestals on the north façade and wood posts on brick pedestals on the east elevation. The centrally located porch entrance is surmounted by a gable that features wood panels, gable returns, decorative brackets and a dentiled cornice that continues the length of the porch. The primary entrance is comprised of a single-leaf, metal door with nine lights surmounted by a transom. There are two additional door openings located on the first story façade and east elevation. One of the door openings and its transom have been boarded with plywood; the other entrance is a single-leaf, wood, paneled door. There is a rounded-arched, stained-glass window with a decorative keystone detail located on the facade. The second story façade features paired, 16/1, wood, double-hung sash windows. The roof is asphalt-shingled and has a hipped-cross-gable form. The facade gable faces north and features a fixed, wood window, fishscale

shingles, and decorative spindle-work and vergeboards. There is also a smaller, gable-roofed dormer on the east portion of the north façade that features cornice returns, a wide, wood frieze and an arched, wood window with a keystone detail. The house features an interior, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **701 West 26th Street**
PROPERTY NAME: Apartment Building, 701 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-0338
DESCRIPTION (S):
This is a two-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1921. It incorporates a brick foundation and a wood frames structural system clad in vinyl siding. The apartment building is comprised of four units with a centrally located, primary entrance on the first story. The primary entrance is comprised of a single-leaf, metal, paneled door. The north façade features two, one-bay, two-story porches incorporated under the main roof. The porches feature square, brick columns and replacement, wood balustrades. Each unit has an entrance on the facade accessing the porch. These entrances are comprised of single-leaf, metal, paneled doors. The building features paired, 1/1, vinyl windows. The roof is flat with wide eaves and features two interior, parged brick chimneys.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **703 West 26th Street**
PROPERTY NAME: House, 703 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0339
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1919. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features an incorporated, one-story, two-bay porch with an asphalt-shingled, hipped roof; and wrought iron posts and balustrade. The second story of the north façade is an enclosed porch clad in vinyl siding punctuated by vinyl, sliding windows. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a metal, storm door surmounted by an 8-light transom. The door is flanked by sidelights that have been partially filled with vinyl siding. The house features 1/1, wood, double-hung sash windows. The roof is side gable clad in asphalt shingles and exhibits wide eaves.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1950. It incorporates a concrete foundation and wood frame structural system clad in asbestos siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **709 West 26th Street**
PROPERTY NAME: House, 709 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0340
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features an incorporated, one-story, two-bay porch with an asphalt-shingled, hipped roof; battered, wood, piers; a replacement balustrade; a dentiled cornice, and carved, scrolled brackets at the corners. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a metal, storm door flanked by sidelights with panels. Surmounting the porch is a square bay crowned by a closed, intersecting gable. Within the gable is a Palladian-type window with fixed lights and a louvered vent. The roof cornice on the bay exhibits a Greek key motif on the frieze. The first-story facade features a paired, 1/1, wood, double-hung sash window. The roof is hipped clad in asphalt shingles. The house features an interior, parged brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **710 West 26th Street**
PROPERTY NAME: House, 710 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0341
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system. The first story is clad in vinyl siding and the second story is clad in aluminum siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, gable roof; battered, wood, piers on brick pedestals; and a replacement balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a metal, storm. The house features single and paired, 6/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the windows on the north façade. The roof is gable clad in asphalt shingles. There is a 4-light, wood, casement window in the façade gable. The house features an interior, brick chimney with a corbelled cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **711 West 26th Street**
PROPERTY NAME: House, 711 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0342

DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1919. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features square, wood columns; a metal awning; and a stuccoed, brick balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door and a metal, storm door. The first story facade features paired, 1/1, wood, double-hung sash windows with storm windows. There is a gable-roofed dormer on the north façade that features paired, 1/1, wood, double-hung sash windows. The roof is side gable clad in asphalt shingles. There are a projecting, shed-roofed bay and an exterior, brick chimney with a cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **712 West 26th Street**
PROPERTY NAME: House, 712 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0343
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system. The first story is clad in vinyl siding and the second story is clad in aluminum siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, gable roof; battered, wood piers; replacement balustrade and newels; and a metal awning. The primary entrance is comprised of a single-leaf, metal, paneled door and a metal, storm door. The house features 1/1, wood, double-hung sash windows flanked by non-functional shutters. There is a gable-roofed dormer on the south façade that features an 8-light, casement, wood window. The roof is hipped and clad in asphalt shingles. There is a one-story, shed-roofed ell appended to the north elevation. There is also a wood deck on the west elevation with a single-leaf, metal, paneled door with lights accessing the deck.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1930.It incorporates a concrete slab foundation and a wood frame structural system that has been parged. It has an asphalt-shingled, side gable roof.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **713 West 26th Street**
PROPERTY NAME: House, 713 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1968
DHR NUMBER (S): 122-5087-0344
DESCRIPTION (S):
This is a one-story house designed in Modern Movement style and constructed in 1968. It incorporates a concrete slab foundation and concrete block structural system. The north façade features a one-story porch with wrought iron posts incorporated under the main roof. The primary entrance has a single-leaf, metal door with a

metal storm door. The house features 2/2, aluminum, double-hung sash windows with applied shutters and rowlock brick sills. The roof is front gable clad in asphalt shingles. The façade gable is clad in asbestos shingles. There is a single-leaf door opening on the west elevation of the house.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **715 West 26th Street**
PROPERTY NAME: House, 715 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1968
DHR NUMBER (S): 122-5087-0345
DESCRIPTION (S):
This is a one-story house designed in Modern Movement style and constructed in 1968. It incorporates a concrete slab foundation and concrete block structural system. The north façade features a one-story porch with wrought iron posts incorporated under the main roof. The primary entrance has a single-leaf, metal door with a metal storm door. The house features 2/2, aluminum, double-hung sash windows with applied shutters and rowlock brick sills. The roof is front gable clad in asphalt shingles. The façade gable is clad in asbestos shingles. There is a single-leaf door opening on the west elevation of the house.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **716 West 26th Street**
PROPERTY NAME: House, 716 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-0346
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1922. It incorporates a brick foundation and wood frame structural system clad in asbestos shingles. The south façade features an incorporated, two-story porch. The first story porch is two-bay with brick piers on brick pedestals, of which two of the brick piers have been stuccoed. The second story porch is three-bay and features wood posts and a closed balustrade clad in asbestos shingles. The primary entrance is comprised of a single-leaf, wood, paneled door and a single-light, metal storm door. There is a single-leaf, wood door with lights and a storm door accessing the second story porch on the south façade. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles. There is an asphalt-shingled, shed-roofed dormer on the south façade that features paired, metal, casement, 1-light windows and visible wood rafters under the dormer roof eaves. There is a one-story ell appended to the north elevation of the house.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **718 West 26th Street**
PROPERTY NAME: House, 718 West 26th Street

OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0347
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, gable roof; and wrought iron posts and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shape light and a storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The roof is hipped and clad in asphalt shingles. There is an asphalt-shingled, gable roof dormer on the south facade that features a casement, eight-light, wood window. There are exposed rafters under the main roof, porch roof, and dormer roof eaves.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1990. It incorporates a concrete slab foundation and wood frame structural system clad in vinyl siding. The shed has a single-leaf, metal, paneled door and an asphalt-shingled, side gable roof.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **723 West 26th Street**
PROPERTY NAME: House, 723 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0348
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1919. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, three bay porch with front and side entrances. The porch is comprised of an asphalt-shingled, hipped roof; replacement, square, wood posts; and a replacement, wood balustrade with turned balusters. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a storm door. The house features replacement, 6/6, metal, double-hung sash windows. The roof is gable clad in asphalt shingles. The closed gable on the façade features a replacement, 1/1, vinyl, double-hung sash window with applied shutters. There is a projecting, one-story, shed-roofed bay with paired windows on the west elevation.

- This resource is a one-story garage designed in the Colonial Revival style and constructed circa 1990. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The garage features paired, 6/6, vinyl, double-hung sash windows and a single-leaf, vertical board door. The roof is hipped clad in asphalt shingles.
- This is a one-story, gable-roofed shed constructed circa 1970. It incorporates a wood frame structural system clad in vinyl siding and features a single-leaf door.

CONTRIBUTING (1 - building)

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **724 West 26th Street**
PROPERTY NAME: House, 724 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0349
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1920. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, gable roof; a boxed cornice; and battered, wood piers on brick pedestals. The central pier has been removed. The primary entrance is comprised of a single-leaf, wood, paneled door with a fan-shaped light. The house features individual and paired, 6/6, vinyl, double-hung, sash windows with screens. The roof is gable clad in asphalt shingles. There is a projecting bay on the west elevation that is surmounted by an intersecting gable.

- This is a one-story shed constructed circa 1950. It incorporates a wood frame structural system with vinyl siding. The shed features 6/6, vinyl, double-hung sash windows and a single-leaf, metal door. The roof is side gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **814 West 26th Street**
PROPERTY NAME: House, 814 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-0350
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1915. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof that has partially collapsed; a replacement, wood balustrade; and replacement, square, wood posts. The primary entrance is comprised of a single-leaf, metal, paneled door. The house features individual and paired, 6/6, aluminum, double-hung sash windows with applied shutters. The roof is side gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **816 West 26th Street**
PROPERTY NAME: House, 816 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1927
DHR NUMBER (S): 122-5087-0351
DESCRIPTION (S):

This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1927. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, shed roof; replacement, wood balustrade; and square, wood, paneled columns. The primary entrance is comprised of a single-leaf, metal, paneled door with a sidelight to the east. The house features individual and paired, 6/6, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles. The house features an exterior, brick chimney with a concrete cap on the west elevation. There is also a one-story, shed-roofed ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **818 West 26th Street**
PROPERTY NAME: House, 818 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1923
DHR NUMBER (S): 122-5087-0352
DESCRIPTION (S):
This is a one-and-one-half story Bungalow constructed in 1923. It incorporates a brick foundation and wood frame structural system clad in vinyl siding and wood shingles. The south façade has a one-story, three bay porch with a central entrance. The porch is incorporated under the main roof and features battered piers clad in wood shingles resting on vinyl-clad pedestals and a metal, awning. The primary entrance is comprised of a single-leaf, wood, paneled door with eight lights and a metal, storm door. The house features double-hung sash windows and an asphalt-shingled, cross-gable roof. The gable on the south façade is clad in wood shingles and exhibits brackets. The gable on the façade also features a paired, vinyl, casement window.

- This is a one-story garage constructed in the Late 10th and Early 20th Century American Movement style and constructed circa 1923. It incorporates a wood frame structural system clad in vertical board siding and a roof clad in asphalt shingles. The garage is in a deteriorated condition.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **820 West 26th Street**
PROPERTY NAME: House, 820 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1968
DHR NUMBER (S): 122-5087-0353
DESCRIPTION (S):
This is a one-story house designed in Modern Movement style and constructed in 1968. It incorporates a concrete slab foundation and concrete block structural system. The south façade features a one-story porch with wrought iron posts incorporated under the main roof. The primary entrance has a single-leaf, metal door with a wood screen door. The house features 2/2, aluminum, double-hung sash windows with applied shutters and rowlock brick sills. The roof is front gable clad in asphalt shingles. The façade gable is clad in asbestos shingles. There is a single-leaf door opening on the east elevation of the house.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **822 West 26th Street**
PROPERTY NAME: House, 822 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1968
DHR NUMBER (S): 122-5087-0354
DESCRIPTION (S):
This is a one-story house designed in Modern Movement style and constructed in 1968. It incorporates a concrete slab foundation and concrete block structural system. The south façade features a one-story porch with wrought iron posts incorporated under the main roof. The primary entrance has a single-leaf, metal door with a metal storm door. The house features 2/2, aluminum, double-hung sash windows with applied shutters and rowlock brick sills. The roof is front gable clad in asphalt shingles. The façade gable is clad in asbestos shingles. There is a single-leaf door opening on the east elevation of the house.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **824 West 26th Street**
PROPERTY NAME: House, 824 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0355
DESCRIPTION (S):
This is a one-story house designed in the Colonial Revival-Bungalow style and constructed in 1920. It incorporates a parged, brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof with exposed wood rafters; chamfered posts with bracketed capitals; a replacement balustrade; and turned newels. The porch foundation is parged brick pier with wood lattice infill. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light and storm door. The house features 1/1, vinyl, double-hung sash windows. The roof is Jerkinhead gable clad in asphalt shingles. The rafters are exposed on the east and west elevations and there are carved outriggers on the south façade gable. There is an exterior, brick chimney with a corbelled cap on the west elevation and an incorporated porch on the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **830 West 26th Street**
PROPERTY NAME: Apartment Building, 830 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1965
DHR NUMBER (S): 122-5087-0356
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1965. It incorporates a concrete block foundation and a frame structural system clad in brick veneer. This building faces

west. The east, north, and south elevations are clad in brick veneer. The first story of the west façade is clad in brick veneer and the second story is clad in wood vertical board siding. There are two entrances located on the west façade. The entrances are located a the south and north corners and are comprised of brick stairs accessing the single-leaf, wood, paneled doors with lights. The building features metal, sliding windows on the east and west elevations. The windows on the first story façade and east elevation have rowlock brick sills. The second story facade windows have applied shutters. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **834 West 26th Street**
PROPERTY NAME: Apartment Building, 834 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1965
DHR NUMBER (S): 122-5087-0357
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1965. It incorporates a concrete block foundation and a frame structural system clad in brick veneer. This building faces east. The west, north and south elevations are clad in brick veneer. The first story of the east façade is clad in brick veneer and the second story is clad in wood vertical board siding. There are two entrances located on the east façade. The entrances are located on the north and south corners and are comprised of brick stairs accessing the single-leaf, wood, paneled doors with lights. The building features metal, sliding windows on the east and west elevations that have been boarded. The windows on the first story façade and west elevation have rowlock brick sills. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **900 West 26th Street**
PROPERTY NAME: House, 900 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1950
DHR NUMBER (S): 122-5087-0358
DESCRIPTION (S):
This is a one-and-one-half-story Modern Movement-style house that was constructed in 1950. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The south façade features a projecting, gable block on the west end. The gable block includes an incorporated, one-story, one-bay porch with a square, wood post that shelters two entrances. One entrance is comprised of a single-leaf, wood, paneled door with nine lights and a wood screen door and the other entrance is comprised of a single-leaf, wood, paneled door with six lights. The building features 6/6, wood, double-hung sash windows and 1/1, aluminum, double-hung sash windows. The roof is side gable clad in asphalt shingles. There is a gabled dormer on the façade at the east end. There is a one-story porch with an asphalt-shingled, shed roof appended to the east elevation, which has been enclosed. The windows on the ell are surmounted by cloth awnings.

- This is a one-story garage constructed circa 1950. It incorporates a wood frame structural system clad in asbestos siding. The garage features a wood garage door and an asphalt-shingled, gable roof.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **906 West 26th Street**
PROPERTY NAME: House, 906 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-0359
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1922. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a porch with one story; two bays; an asphalt-shingled, hipped roof; wood piers resting on brick pedestals; and a replacement, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door. The roof is Jerkinhead gable clad in asphalt shingles. A window opening in the façade gable has been clad in vinyl siding. The windows are 2/2, wood, double-hung sash. The house features an exterior, parged brick chimney on the north elevation. There is also an incorporated, one-story porch on the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **910 West 26th Street**
PROPERTY NAME: House, 910 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1950
DHR NUMBER (S): 122-5087-0360
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1950. It incorporates a parged concrete block foundation and a stuccoed wood frame structural system. The south façade features a one-story, one-bay porch accessed by brick stairs and surmounted by an asphalt-shingled, hipped roof. The porch features wood posts and balustrade. The house features 8/8, metal, double-hung sash windows with rowlock brick sills. The windows on the south façade are flanked by applied shutters. The roof is hipped and clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **914 West 26th Street**
PROPERTY NAME: House, 914 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-0361
DESCRIPTION (S):

This is a two-story house designed in the Colonial Revival style and constructed in 1914. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof and wrought iron posts and balustrade. The primary entrance is comprised of a single-leaf, wood door with a wrought iron storm door surmounted by a transom. The house features 2/2, wood, double-hung sash windows with metal screens. There is a large, 1/1, wood window on the first-story of the façade. The roof is gable with a boxed cornice and cornice returns on the south façade. There is a casement, four-light, wood window in the façade gable. The house features an interior, brick chimney with a corbelled cap on the north elevation. There is also a one-story, shed-roofed ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **915 West 26th Street**
PROPERTY NAME: Apartment Building, 915 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1940
DHR NUMBER (S): 122-5087-0362
DESCRIPTION (S):
This is a two-story apartment building designed in the Colonial Revival style and constructed in 1940. It incorporates a brick foundation and 3-course, Flemish-American bond brick structural system. There is a rowlock course brick watertable. The primary entrance is centrally located on the north façade. The entrance is comprised of a single-leaf, wood, paneled door with two lights framed by a classical surround. The door surround includes wood pilasters, a rounded arch with a fan-shaped motif surmounting the door and a gable with cornice returns. There is a two-story, two-bay porch appended to the east elevation of the building. The porch features wood posts and is accessed by single-leaf doors on each story. The building features 6/1, wood, double-hung sash windows with rowlock brick sills and storm windows. The roof is hipped clad in slate shingles and exhibits a wood, boxed cornice.

- This is a one-story, two-car garage designed in the Modern Movement style and constructed circa 1940. It incorporates a brick foundation and 3-course, Flemish-American bond brick structural system. The garage features two, wood, paneled, roll-up doors with six lights. The roof is flat with parapet walls and rowlock brick coping.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **918 West 26th Street**
PROPERTY NAME: House, 918 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1900
DHR NUMBER (S): 122-5087-0363
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1900. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade

features a one-story, one-bay porch with an asphalt-shingled, hipped roof and wrought iron posts and balustrade. The primary entrance and windows on the first-story façade have been boarded with plywood. The house features replacement, 1/1, vinyl windows on each elevation. The roof is gable clad in asphalt shingles and exhibits a boxed cornice with cornice returns. There is a fixed, wood, arched window in the façade gable. Two ells have been appended to the north elevation of the house. The ell abutting the north elevation is two stories with a slightly lower roofline than the main house. This ell features an interior, brick chimney. Another ell is appended to the north wall of the ell and is one story.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1950. It exhibits a frame structural system clad in corrugated metal siding and an asphalt-shingled, gable roof.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **926 West 26th Street**
PROPERTY NAME: Duplex, 926 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0364
DESCRIPTION (S):
This is a two-story duplex designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a parged brick foundation and wood frame structural system clad in vinyl siding. The south façade features a two-story, two-bay porch with an asphalt-shingled, flat roof, and replacement, wood posts and balustrade. The first story entrance is a single-leaf door opening which leads to a vestibule with two entrances for the first story unit and second story unit. There is also a single-leaf, wood door with a wood screen door accessing the second story porch. The house features individual and paired, 1/1, wood, double-hung sash windows with screens. The roof is gable clad in asphalt shingles. There are two, interior, parged brick chimneys with metal caps on the west elevation of the duplex.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1004 West 26th Street**
PROPERTY NAME: 7-Up Bottling Company
OTHER NAME (S): J & T Body Shop/Norfolk Landscaping Co.
CONSTRUCTION DATE: 1946
DHR NUMBER (S): 122-5087-0024 122-0904
DESCRIPTION (S):
This is a one-story manufacturing facility designed in the Art Deco style and constructed in 1946. It incorporates a concrete slab foundation and a concrete block structural system that as been parged. The south façade features a centrally located, pavilioned entrance bay with two entrances. The east entrance has been parged and the west entrance is comprised of a single-leaf, metal door surmounted by a parged transom. The windows on the south façade have been partially parged but are filled with a band of glass block windows. The building features, metal, industrial sash windows on the east and west elevations. There are three, metal, roll-up

doors on the east elevation. There is a one-story, projecting, squared bay appended to the west elevation that features double-leaf, metal doors. The roof is flat with a stepped parapet. The building features an interior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1010-1014 West 26th Street**
PROPERTY NAME: 7-Up Bottling Plant
OTHER NAME (S): Ray's Body Shop
CONSTRUCTION DATE: 1930
DHR NUMBER (S): 122-5087-0025 122-0478
DESCRIPTION (S):
This is a one-story manufacturing facility designed in the Art Deco style and constructed in 1930. It incorporates a concrete slab foundation and a concrete block structural system. The south portion of the building is clad in brick veneer. The south façade features a centrally located, projecting entrance bay with streamlined rounded corners; a stepped parapet; and polychrome brick beltcourses. The entrance block features a single-leaf, metal and plate glass door surmounted by a transom and flanked by glass block windows. A projecting, metal, streamline overhang surmounts the entrance. The building features metal, industrial sash windows. There is a garage bay on the east end of the south façade. There is a metal, roll-up door on the north elevation. The roof is flat with a parapet coped in a polychrome, brick soldier course on the south end. There is an oversized, interior, brick chimney on the west elevation. There is a projecting, metal air duct appended to the east elevation.

- There is a one-story, metal shelter appended to the north elevation of the building. The shelter is designed in the Modern Movement style and was constructed circa 1945. It incorporates an open metal frame structural system. The roof is a low-raking gable clad in corrugated metal.

CONTRIBUTING (1 - building)
CONTRIBUTING (1 - structure)

PROPERTY ADDRESS: **1037 West 26th Street**
PROPERTY NAME: Warehouse, 1037 West 26th Street
OTHER NAME (S):
CONSTRUCTION DATE: circa 1930
DHR NUMBER (S): 122-5087-1001
DESCRIPTION (S):
This is a one-story warehouse designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1930. It incorporates a brick foundation and a brick structural system. The building features a parged watertable on the south façade and the east and west elevation. The east elevation has been parged and features a garage bay with a roll-up, metal door. The building features multiple-light, metal industrial sash windows with rowlock brick sills. A soldier brick course lintel surmounts the windows. The roof is flat with a stepped parapet on the east and west elevation. The parapet is coped in metal. The south façade features a corbelled brick cornice.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1038 West 26th Street**
PROPERTY NAME: E. T. Gresham Co.
OTHER NAME (S):
CONSTRUCTION DATE: 1940
DHR NUMBER (S): 122-5087-0026 122-0905
DESCRIPTION (S):
This is a two-story manufacturing facility designed in the Art Deco style and constructed in 1940. It incorporates a concrete slab foundation and a brick structural system. The south end of the building has been parged. The south façade features a centrally located, two-story bay with a centrally located entrance surmounted by a projecting, streamline, metal overhang. The southeast and southwest corners of the building are curved. The first story window openings on the south façade have been parged. The second story façade features metal, industrial sash windows. The east elevation features two, single-leaf, metal doors; metal, industrial sash windows; and a sliding, metal, multiple light door. The west elevation features a one-story, projecting, squared block with a centrally located entrance surmounted by a projecting, metal, streamline overhang. The roof is monitor with a parapet on the south facade coped in metal.

- This is a large-scale manufacturing facility designed in the Modern Movement style and constructed circa 1940. It incorporates a concrete slab foundation and a metal frame structural system clad in corrugated metal. There are metal, roll-up doors on the south elevation. The building features metal, industrial sash windows. The roof is monitor clad in corrugated metal. There is a metal-framed, metal-clad garage appended to the west elevation.

CONTRIBUTING (2 - buildings)

West 27th Street

PROPERTY ADDRESS: **109 West 27th Street**
PROPERTY NAME: Garage, 109 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0370
DESCRIPTION (S):
This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a concrete slab foundation and 7-course, American bond brick structural system. The door openings on the north façade have been boarded. On the east end of the north façade the soldier course brick plinth and rowlock brick sills are still visible. The windows on the north façade are casement and wood. The roof is flat with parapet walls that step down on the east and west elevations of the building. Wood rafters are visible on the north façade and the parapet walls are coped in rowlock brick. A

portion of the west elevation has been re-bricked with concrete block. This building is associated with DHR# 122-0907/122-5087-0119, Thomas Motor Company (2609 Granby Street), an automobile dealership.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **123 West 27th Street**
PROPERTY NAME: House, 123 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-0372
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Late 19th and Early 20th Century style and constructed in 1916. It incorporates a 6-course, American bond brick foundation and structural system. The north façade features an incorporated, brick porch with brick stairs flanked by brick cheek walls coped in limestone accessing the entrance. The window and door openings are partially clad in aluminum sliding on the porch. The windows on the porch are metal and awning, and the door opening is comprised of a single-leaf, metal storm door flanked by sidelights. The house features 1/1, wood, double-hung sash windows with limestone sills. There are also casement, wood windows piercing the foundation. There is a single-leaf, metal, paneled door with a metal storm door on the west elevation. The roof is gable clad in slate shingles with brackets under the roof eave on the north façade. The house features two, interior brick chimneys with corbelled caps on the west elevation. The south chimney has been parged.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **200 West 27th Street**
PROPERTY NAME: House, 200 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-0373
DESCRIPTION (S):
This resource is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1905. It incorporates a brick foundation and a wood frame structural system. The first story is clad in rusticated ashlar stone veneer and the second story is clad in wood shingles. The south façade features a one-story, one-bay porch with an asphalt-shingled, hipped roof; and replacement, wood posts and balustrade. The primary entrance is comprised of a single-leaf, wood door with three boarded lights surmounted by a boarded transom. The east end of the south façade is a two-story, projecting, squared bay surmounted by a closed gable. The closed gable is clad in wood shingles and features a 1/1, wood, double-hung sash window. The house features 1/1, wood, double-hung sash windows with storm windows. The second story windows on the façade are surmounted by metal awnings. The roof is hipped-cross-gable clad in asphalt shingles with a boxed cornice and wide frieze. There is a hip-roofed dormer on the west elevation and a two-story, canted bay surmounted by a closed gable on the east elevation. The house features an interior, rusticated stone.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **204 West 27th Street**
PROPERTY NAME: House, 204 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0374
DESCRIPTION (S):
This resource is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1906. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof. The porch has been enclosed with plywood and wood lattice. The porch entrance is comprised of a wood frame screen door. The east end of the south façade is a two-story, projecting, squared bay surmounted by a closed gable. The closed gable is clad in diamond-cut and squared-cut wood shingles and features a wood, casement window. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is hip clad in asphalt shingles with a boxed cornice and wide frieze. There is an oversized gable-roofed dormer on the west elevation that is clad in wood shingles and features a 1/1, double-hung sash window and cornice returns. There are also gable-roofed dormers on the east elevation and south façade, which feature closed gables and six-light, wood, casement windows and diamond-cut and squared-cut shingles. The house features an interior, brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **210 West 27th Street**
PROPERTY NAME: House, 210 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1900
DHR NUMBER (S): 122-5087-0375
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1900. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch on the southwest corner of the house. The porch features an asphalt-shingled, hipped roof with an intersecting gable with cornice returns above the porch entrance, and square, wood posts with modified, plain capitals. The west corner of the porch is enclosed and is clad in vinyl siding. The enclosure features a 6/1, aluminum, double-hung sash window. The primary entrance is comprised of a single-leaf, metal, paneled door surmounted by a transom. The east end of the façade is comprised of a projecting, two-story, canted bay surmounted by a gable with paired, wood, casement windows. Windows are located on the cants of the canted bay only. The house features 1/1, wood, double-hung sash windows with storm windows. There is a stained glass window on the west elevation. There are two-story, canted bays on the west and east elevations. Windows are located on the cants of the canted bays. The west elevation features a single-leaf, metal, paneled door accessed by a wood staircase. There are hip-roofed dormers on the east and west elevations that feature paired, wood, casement windows. The roof is hipped-cross-gable clad in asphalt

shingles. The house features two interior, brick chimneys with corbelled caps on the west elevation. There is a one-story ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **211 West 27th Street**
PROPERTY NAME: House, 211 West 27th Street
OTHER NAME (S): Apartment Building, 211 West 27th Street
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-0376
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1905. It incorporates a parged brick foundation and wood, frame structural system clad in vinyl siding. The north façade features a one-story, wrap-around porch with an asphalt-shingled, hipped roof and replacement, wood posts and balustrade. The east end of the wrap around porch is incorporated under the second story. The house has been converted into a multiple family dwelling and features two entrances on the north façade. Each entrance is comprised of a single-leaf, metal, paneled door. The east entrance is setback from the north façade and is under the second story. The house features 1/1, vinyl, double-hung sash windows with metal screens. The roof is hipped-cross-gable clad in asphalt shingles with a boxed cornice, and cornice returns in the intersecting gables on the north façade and east elevation. The house has an interior, brick chimney with a corbelled cap. There is a one-story ell appended to the south façade that features a single-leaf, metal paneled door.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **213 West 27th Street**
PROPERTY NAME: House, 213 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0377
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1919. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The north façade features an incorporated, one-story, two-bay porch with an asphalt-shingled, shed roof; battered, wood piers; turned balusters; and exposed rafters. The second-story porch features metal, awning windows and is clad in asbestos siding. The primary entrance is comprised of a single-leaf, metal, paneled door surmounted by a transom and flanked by sidelights clad in asbestos siding. The second story of the north façade is an enclosed second-story porch. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles with wide eaves. There is a gable-roofed dormer on the north façade that features paired, 1/1, wood, double-hung sash windows and exposed rafters. There is an interior, parged brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **215 West 27th Street**
PROPERTY NAME: House, 215 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0378
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1919. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, shed roof; battered, wood piers; and turned balusters. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door surmounted by a transom and flanked by multi-light sidelights. The second story of the north façade porch is enclosed. The second-story porch features screened in window openings and is clad in vinyl siding. The house features individual and paired, 6/1, wood, double-hung sash windows. The roof is side gable clad in asphalt shingles with wide eaves. There is a shed-roofed dormer on the north façade that features paired, 8/8, wood, double-hung sash windows. There is an interior, parged brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **216 West 27th Street**
PROPERTY NAME: House, 216 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1904
DHR NUMBER (S): 122-5087-0379
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1904. It incorporates a stuccoed brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, two-bay porch with and asphalt-shingled, hip roof with a pedimented entrance and cornice with a wide frieze surmounting the porch entrance. The porch also features metal awnings; individual and paired, fluted, Doric columns; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door. The first story façade features a two-story, projecting, squared bay on the west end. This bay is surmounted by a closed, Jerkinhead-gable and features paired, wood, 1/1, double-hung sash windows on both sides. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows surmounted by metal awnings. The roof is hip clad in asphalt shingles. The roof features hip-roofed dormers on the east and west elevations. The house features two interior, parged brick chimneys. There is a one-story porch appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **227 West 27th Street**
PROPERTY NAME: House, 227 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906

DHR NUMBER (S): 122-5087-0380
DESCRIPTION (S):
This is a two-and-one-half story house designed in the Queen Anne style and constructed in 1906. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The north elevation features a one-story, three bay porch with an asphalt-shingled, hipped roof, and wrought iron posts and balustrade. There is a replacement wood balustrade on the west elevation of the porch and on the stairs accessing the porch entrance. The house has been converted into an apartment building and features two, single-leaf, wood doors on the north façade. The west end of the porch exhibits a second-story balcony with a wood, balustrade. There is a single-leaf, wood door with screen door accessing the second story balcony. The east end of the north façade features a two-story, canted bay surmounted by a closed gable. The closed gable features a Palladian window grouping of an arched, Queen Anne, wood window flanked by 3-light, casement, wood windows with keystone details. The house features 9/1 and 2/2, wood, double-hung sash windows. The first-story windows on the west elevation have been replaced with 1/1, vinyl windows. There is a projecting, squared bay on the west elevation that is surmounted by a closed gable. The roof is hip on deck and exhibits intersecting, closed gables on the east and west elevations. The roof is clad in slate shingles. The closed gables on the east and west elevations feature arched, wood, Queen Anne windows. There is also a gable-roofed dormer on the west end of the north façade that features a boxed cornice with cornice returns and an arched, wood, Queen Anne window with a keystone detail. The house features three central, interior, brick chimneys with corbelled caps. There is an incorporated, two-story porch with wood posts and balustrade on the west end of the south façade.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **228 West 27th Street**
PROPERTY NAME: House, 228 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0381
DESCRIPTION (S):
This resource is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1906. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood columns; and a replacement, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door. The west end of the south façade is a two-story, canted bay surmounted by a closed gable. The closed gable is clad in wood shingles and features a replacement, 1/1, vinyl, double-hung sash window. The house features replacement, 1/1, vinyl, double-hung sash windows. The roof is hipped-cross-gable clad in asphalt shingles with a boxed cornice. There are closed gables on the east and west elevations which are clad in wood shingles. There are closed gable-roofed dormers on the west elevation and south façade that are clad in wood shingles and feature window openings. The house features an interior, brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **232 West 27th Street**
PROPERTY NAME: House, 232 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-0382
DESCRIPTION (S):
This resource is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, slender, Tuscan columns; a replacement, wood balustrade; and a dentiled cornice. The primary entrance is comprised of a single-leaf, wood, paneled door with a storm door surmounted by a three-light transom and flanked by sidelights. The house features replacement, 1/1, vinyl, double-hung sash windows. The roof is hip clad in asphalt shingles with a boxed and dentiled cornice. There are hip-roofed dormers on the south façade and east elevation that feature paired 1/1, vinyl, double-hung sash windows and dentiled cornices. There is a two-story, projecting, canted bay surmounted by a closed gable on the west elevation. The closed gable features a window opening and a dentiled cornice. The house features an interior, brick chimney with a corbelled cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **233 West 27th Street**
PROPERTY NAME: House, 233 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0383
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and wood frame structural system clad in Bricktex siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; fluted, Doric columns resting on brick pedestals; and turned balusters. The primary entrance is comprised of a single-leaf, wood door with a metal, storm door surmounted by a 5-light transom and flanked by sidelights. There is a two-story canted bay on the east end of the north façade. The house features 1/1, wood, double-hung sash windows. The roof is gable clad in slate shingles. The closed gable on the north façade features a Palladian window grouping and elongated brackets under the roof cornice. There are closed gables on the east and west elevations that feature 1/1, wood, double-hung sash windows. The house features two central, interior brick chimneys with corbelled caps. There is a one-story ell appended to the south elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1960. It incorporates a wood frame structural system clad in stucco. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **234 West 27th Street**
PROPERTY NAME: House, 234 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-0384
DESCRIPTION (S):
This resource is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1915. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, wrap-around porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and turned balusters. The primary entrance is comprised of a single-leaf, wood, paneled door flanked by sidelights. On the east end of the second story façade is a canted bay surmounted by a closed gable that features a fixed, wood, octagonal window. The house features replacement, 1/1, metal, double-hung sash windows. The roof is gable clad in slate shingles with a boxed cornice. There is a two-story, canted bay surmounted by a closed gable on the east elevation. Appended to the northeast corner is a one-story, projecting block that includes a side entrance. The entrance is comprised of a single-leaf, metal, paneled door with a storm door sheltered by a one-story, one-bay porch. The house features a central, interior, brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **236 West 27th Street**
PROPERTY NAME: House, 236 West 27th Street
OTHER NAME (S): Duplex, 236 West 27th Street
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0385
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1919. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof, and replacement wood posts and balustrade. There are two entrances on the south façade. The west entrance has been boarded. The east entrance is comprised of a single-leaf, metal, paneled door. There is a canted bay surmounted by a closed gable on the east end of second story façade. The closed gable features a 1/1, wood, double-hung sash window. The house features replacement, 1/1, metal, double-hung sash windows. There is a two-story, projecting, squared bay surmounted by a closed gable on the west elevation. There is a closed gabled dormer on the east elevation. The roof is hipped-cross-gable clad in slate shingles. The house features an interior, brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **238 West 27th Street**
PROPERTY NAME: House, 238 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919

DHR NUMBER (S): 122-5087-0386
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1919. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and turned balusters. The primary entrance is comprised of a single-leaf, metal, paneled door with a wrought iron storm door. There is a canted bay surmounted by a closed gable on the east end of second story façade. The closed gable features a 1/1, wood, Queen Anne, double-hung sash window. The house features 1/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, squared bay surmounted by a closed gable on the west elevation. There is a closed gabled dormer on the east elevation. The roof is hipped-cross-gable clad in slate shingles. The house features an interior, brick chimney on the east elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1950. It incorporates a concrete slab foundation and wood frame structural system clad in wood vertical board siding. It has an asphalt-shingled, gable roof.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **240 West 27th Street**
PROPERTY NAME: House, 240 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0387
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1919. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, gable roof; battered, wood piers; turned balusters; and a metal awning. The primary entrance is comprised of a single-leaf, metal, paneled door with a metal storm door surmounted by a transom and flanked by sidelights with applied wrought iron bars. The house features individual and paired, replacement, 1/1, vinyl, double-hung sash windows. Wrought iron bars have been applied to the first story façade windows and metal awnings surmount the second story paired façade windows. The roof is gable clad in asphalt shingles and the house has an interior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **241 West 27th Street**
PROPERTY NAME: House, 241 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 2003
DHR NUMBER (S): 122-5087-0388
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 2003. It exhibits some

Queen Anne elements. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The north façade features a one-story, one-bay porch with an asphalt-shingled, shed roof and wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door. The west end of the north façade features a projecting bay surmounted by a gable roof clad in wood shingles with cornice returns. The house features 6/6 and 4/4, aluminum, double-hung sash windows. The roof is gable clad in asphalt shingles with cornice returns on the north façade.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **242 West 27th Street**
PROPERTY NAME: House, 242 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0389
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1919. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a two-story, two-bay porch with wood posts and a replacement balustrade on the first story. The second story of the porch has been enclosed and exhibits screened window openings. The main porch roof has a shed form and is clad in asphalt shingles. The first story of the porch is articulated by a false-hipped roof. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light surmounted by a multi-light transom and flanked by multi-light sidelights of which one has been boarded. There is a single-leaf, wood door accessing the second story porch. The house features individual and paired, 1/1, vinyl, double-hung sash windows. The roof is side gable clad in asphalt shingles with wide eaves. The house features an interior, parged, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **243 West 27th Street**
PROPERTY NAME: House, 243 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-0390
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1916. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The north façade features an enclosed, one-story, two-bay porch with an asphalt-shingled, hipped roof. The porch is clad vinyl siding, is pierced by fixed, screen, windows and is accessed by single-leaf, metal, screen door. The original boxed cornice and wood, Tuscan columns are still visible. There is a two-story, canted bay surmounted by a closed gable on the west end of the facade. The closed gable features a boarded, wood, double-hung sash, Queen Anne window. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is hipped-cross-gable and clad in slate shingles. There are intersecting gables on the east and west elevations.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **245 West 27th Street**
PROPERTY NAME: House, 245 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-0391
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1914. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hip roof; boxed cornice; wood, Tuscan columns; turned balusters; and a metal awning. The primary entrance is comprised of a single-leaf, wood door with a metal storm door. On the east end of the second story of the façade, there is a canted bay surmounted by a closed gable. The closed gable features paired, 2/2, metal, double-hung sash windows. The house features 2/2, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles with a boxed cornice on the facade and cornice returns on the east and west elevations. The house features an interior, brick chimney with a corbelled cap on the east elevation. There is a one-story ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **305 West 27th Street**
PROPERTY NAME: House, 305 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1904
DHR NUMBER (S): 122-5087-0392
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1904. It incorporates a brick foundation and a wood frame structural system clad in weatherboard and wood shingles. The north façade features an incorporated, one-story, two-bay porch with battered, wood piers resting on brick pedestals; a replacement, wood balustrade; and exposed wood rafters under the eaves. The primary entrance is comprised of a single-leaf, wood paneled door with a light flanked by multi-light sidelights and surmounted by a multi-light transom. The second story façade features a porch within a shed-roofed dormer. The porch is clad in wood shingles and features paired and clustered, wood posts; a wood balustrade; and exposed, wood rafters under the eaves. There is a single-leaf, wood paneled door with six lights accessing the second story porch. The house features individual and paired, 6/1, wood, double-hung sash windows. There is a gable-roofed dormer on the north façade that features exposed wood rafters under the eaves and paired, 1/1, wood, double-hung sash windows. The roof is side gable and clad in asphalt shingles. The south portion of roof is gable and perpendicular to main roof. There are exposed rafters under the eaves. There is a two-story porch at to the southeast corner.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **310 West 27th Street**
PROPERTY NAME: House, 310 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0393
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1906. It incorporates a brick foundation and wood frame structural system clad in weatherboard siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a dentiled cornice; wood, Tuscan columns; and turned balusters. The porch has been enclosed with wood-framed screens. The primary entrance is comprised of a single-leaf, wood, paneled door with a metal storm door surmounted by a transom. The east end of the façade features a two-story, canted bay surmounted by a closed gable. The closed gable features a 3/1, wood, double-hung sash window. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles. There is a closed gable and an interior, brick chimney with a corbelled cap on the east elevation. There is a one-story porch appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **311 West 27th Street**
PROPERTY NAME: House, 311 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-0394
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1921. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a boxed cornice; wood, chamfered posts; and a replacement balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a metal storm door surmounted by a board transom. The house features 2/2 and 6/6, wood, double-hung sash windows. The roof is gable clad in asphalt shingles and features a boxed cornice with cornice returns on the north façade. There is a continuous, wide frieze under the cornice and closing the façade gable. The house features two, interior, brick chimneys on the east elevation. There is a one-story, shed-roofed porch appended to the south elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1930. It incorporates a wood frame structural system clad in vinyl siding and an asphalt-shingled, gable roof. The garage features a paneled, double-leaf, wood door.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **320 West 27th Street**
PROPERTY NAME: House, 320 West 27th Street

OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-0395
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1921. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The south façade features an incorporated, three-bay porch with wood, Tuscan columns; a replacement, wood balustrade; and a metal awning. The primary entrance is comprised of a single-leaf door with a metal storm door flanked by paneled sidelights. The second story façade features an enclosed porch clad in aluminum siding with visible, battered, wood piers. Between the piers are 1/1, aluminum, double-hung sash windows. The porch features a shed roof clad in asphalt shingles. The house features 1/1, wood, double-hung sash windows with storm windows. The first story windows on the east elevation are surmounted by metal awnings. There is a slate-shingled, hip-roofed dormer on the south façade that features paired, 1/1, wood, double-hung sash windows with storm windows. The roof is hip clad in slate shingles and there is an exterior, brick chimney with a corbelled cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **322 West 27th Street**
PROPERTY NAME: House, 322 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1903
DHR NUMBER (S): 122-5087-0396
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1903. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, three bay porch with an asphalt-shingled, hip roof; replacement wood posts and balustrade; a dentiled cornice; wide frieze; and modillions. The porch foundation is comprised of brick piers infilled with lattice. The primary entrance is centrally located and has missing doors exposing the vestibule. The entrance is comprised of a single-leaf, wood door with a storm door surmounted by a transom and flanked by boarded sidelights. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The roof is gable with an intersecting gable on the west elevation and is clad in asphalt shingles. The closed gable on the south façade features a wood, Palladian window. There is a one-story, projecting, square, shed-roofed bay on the south end of the west elevation. There is a two-story, canted bay surmounted by a closed gable on the west elevation. This closed gable features carved brackets under the roof eaves. There is a two-story, shed-roofed porch with wood posts and balustrade appended to the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **329 West 27th Street**
PROPERTY NAME: House, 329 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1903

DHR NUMBER (S): 122-5087-0397
DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1903. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The first story of the north façade is clad in brick veneer. The façade features a one-story, two bay porch with an asphalt-shingled, gable roof, and wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal door. The house features 6/6, wood, double-hung sash windows. The windows on the first story façade exhibit rowlock brick sills. The roof is cross gable clad in asphalt shingles and exhibits cornice returns. The house features an interior, parged brick chimney with a metal cap on the west elevation. There is an incorporated, one-story porch located at the southwest corner of the house. Appended to the southeast corner of the house is a one-story, shed-roofed ell.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **400 West 27th Street**
PROPERTY NAME: House, 400 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0398
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hip roof; vinyl-clad, square posts; and a replacement balustrade. There is a one-story canted bay on the west end of the south façade on the first story. The primary entrance is located in the canted bay and comprised of a single-leaf door with a wrought iron storm door surmounted by a boarded transom. The house features replacement, 1/1, vinyl windows. The roof is cross gable clad in asphalt shingles. The closed gables on the south facade and east elevation feature paired, 1/1, wood windows with storm windows. These windows are recessed from the main wall plane and are articulated by wood balustrades that are flush with the main wall plane. The apex of the gable projects slightly from the main wall plane forming a shallow hood. The house features two, central, interior brick chimneys with corbelled caps. There is a one-story, shed-roofed ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **401 West 27th Street**
PROPERTY NAME: House, 401 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1941
DHR NUMBER (S): 122-5087-0399
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1941. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, gable roof; a metal awning; and wrought posts and balustrade. The primary entrance is comprised of a single-

leaf door. The house features individual and paired, 6/1, wood, double-hung sash windows. The roof is front gable clad in asphalt shingles. The house features an interior brick chimney on the east elevation. There is a one-story, lattice-clad porch appended to the south elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1970. The garage faces east to Debree Avenue. It incorporates a concrete slab foundation and wood frame structural system clad in vinyl siding. It features a single-leaf, wood paneled door with lights and a roll-up garage door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **405 West 27th Street**
PROPERTY NAME: Duplex, 405 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1956
DHR NUMBER (S): 122-5087-0400
DESCRIPTION (S):
This is a one-story duplex designed in the Modern Movement style and constructed in 1956. It incorporates a brick foundation and brick structural system. The west end of the north façade features a projecting, hip-roofed block. The hip-roofed block features a stoop with a wrought-iron balustrade and brick stairs accessing one of the duplex units. The entrance is comprised of a single-leaf metal, paneled door with a metal storm door. The hip-roofed block also features a window grouping of an oversized, fixed, wood window flanked by 2/2, wood, double-hung sash windows with a rowlock brick sill. The east end of the north façade features an entrance to one of the duplex units. The entrance is comprised of a single-leaf, metal paneled door with two lights and a metal storm door. There is a stoop with a wrought iron balustrade and brick stairs accessing the entrance. There is a brick wall that extends north at the east end of the north elevation of the projecting, hipped roof block. The roof is front gable and clad in asphalt shingles. The gable façade is clad in asbestos siding.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **406 West 27th Street**
PROPERTY NAME: House, 406 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1998
DHR NUMBER (S): 122-5087-0401
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1998. The house is a modern adaptation of the Queen Anne style. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The east end of south façade features a projecting, one-story, two-bay porch with an asphalt-shingled, shed roof and turned posts. The west end of the south façade features a two-story, projecting, squared block surmounted by a gable. The gable is clad in fishscale-shingle-cut vinyl siding and exhibits cornice returns. The primary entrance is comprised of a single-leaf, metal paneled

door with a storm door flanked on the east by sidelights. The house features 1/1, vinyl, double-hung sash windows. The roof is side gable clad in asphalt shingles and exhibits cornice returns on the east and west elevations. There is a one-story garage appended to the east elevation, which is setback from the south façade. The garage features a roll-up, metal, paneled, garage door and an asphalt-shingled, side gable roof.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **408 West 27th Street**
PROPERTY NAME: House, 408 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1996
DHR NUMBER (S): 122-5087-0402
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1996. The house is a modern adaptation of the Queen Anne style. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hip roof and plain wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door. The house features 1/1, vinyl, double-hung sash windows. The roof is gable clad in asphalt shingles. The closed gable façade is clad in fishscale-shingle-cut vinyl siding. There is a narrow, two-story, projecting, squared bay surmounted by a gable with cornice returns on the west elevation. There is a one-story, gable-roofed ell appended to the north elevation. The ell features a single-leaf, metal paneled door on the west elevation.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **409 West 27th Street**
PROPERTY NAME: Duplex, 409 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-0403
DESCRIPTION (S):
This is a two-story duplex designed in the Craftsman style and constructed in 1921. It incorporates a brick foundation and a wood frame structural system clad in textured vinyl siding. The west end of the north façade features a projecting, two-story, gable-roofed porch clad in textured vinyl siding. The second story of the porch has been enclosed with screens and exhibits vinyl brackets under the roof eaves. The east end of the façade features a stoop with replacement, wood balustrade and brick stairs accessing the primary entrance. The primary entrance is comprised of a single-leaf, metal paneled door with a storm door. The entrance accessing the first-story porch is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a wrought-iron storm door. The entrance accessing the second-story porch is single-leaf, wood with lights. The duplex features 1/1, wood, double-hung sash windows with surrounds exhibiting battered pilasters. The roof is gable clad in asphalt shingles and exhibits vinyl brackets under the wide eaves.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1930. It incorporates a concrete slab foundation and wood frame structural system clad in vinyl siding. The garage features a roll-up, metal, paneled door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **417 West 27th Street**
PROPERTY NAME: Apartment Building, 417 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0404
DESCRIPTION (S):
This is a three-story apartment building designed in the Colonial Revival style and constructed in 1918. It incorporates a brick foundation and a 7-course, American bond brick structural system whose façade is clad in common bond brick veneer. The north façade features two, three-story, one-bay porches flanking the centrally placed entrance, which are under a common porch roof. The porches feature brick piers with wood capitals, wood balustrades, and a flat roof with a dentiled cornice and modillions. The primary entrance is comprised of a 9-light, single-leaf, wood door surmounted by a transom and flanked by 5-light sidelights. There are also single-leaf, wood doors with storm doors surmounted by transoms accessing each of the six porches on the façade. The building features 9/1, wood, double-hung sash windows with limestone sills on the façade and rowlock course brick sills on the sides and rear elevations. There are two casement, wood windows with limestone sills centrally located on the façade at the second and third stories. The roof is flat with a parapet and features a corbelled cornice. The building features six, interior, parged brick chimneys on the side elevations.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **423 West 27th Street**
PROPERTY NAME: Apartment Building, 423 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-0405
DESCRIPTION (S):
This is a three-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1916. It incorporates a 7-course American bond brick foundation and a 7-course, American bond brick structural system. The north façade is clad in common bond brick veneer and portions of the façade on the third story have been parged. The north façade features a three-story, one-bay porch on the east end. The porch features a flat roof clad in metal, and replacement, wood posts and balustrades. The primary entrance is comprised of a single-leaf, wood, paneled door surmounted by a transom and wood cornice. The entrance also features a wrought iron storm door. There are also single-leaf, wood doors with storm doors surmounted by transoms accessing the second and third story porches. The building features 1/1, wood, double-hung sash windows with storm windows and rowlock brick sills. The windows on the east and west elevations are articulated by 2-course, rowlock brick, jack arch lintels. The roof is flat with a parapet coped in a rowlock

brick course. There is a frame ell appended to the south elevation of the façade. The first story of the ell is clad in vinyl siding and the second a third stories are porches. The west elevation of the building features a centrally located recess in the wall plane. The building features an interior, brick chimney with a corbelled cap on the east elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a concrete slab foundation and wood frame structural system clad in vertical board. The roof is hipped clad in asphalt shingles. The doors are vertical board and double-leaf.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **424 West 27th Street**
PROPERTY NAME: House, 424 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1941
DHR NUMBER (S): 122-5087-0406
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1941. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, gable roof; battered, wood piers; a wrought iron balustrade; and a metal awning. The primary entrance is comprised of a single-leaf, wood door with a wrought iron storm door. The house features 3/1, wood, double-hung sash windows with screens. Metal awnings surmount the windows on the west elevation. The roof is gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **426 West 27th Street**
PROPERTY NAME: House, 426 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0407
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1906. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The south façade features a one-story, four-bay porch with an asphalt-shingled, flat roof; a boxed cornice; battered, wood piers resting on brick pedestals; and a replacement wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a storm door surmounted by a three-light transom. There is a projecting, squared bay surmounted by a closed gable on the west end of the second story façade which is supported by the west end of the porch. The closed gable features a casement, wood window, vergeboards, and a raking cornice. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is deck-on-hip clad in asphalt shingles with a cornice and frieze. There are hip-roofed dormers on the south façade, and east and west elevations. The dormers feature casement, wood windows and exhibit cornices with a wide frieze. There is a

one-story ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **427 West 27th Street**
PROPERTY NAME: House, 427 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-0408
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Craftsman style and constructed in 1914. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch incorporated under the main roofline. The porch features replacement, paired, wood posts and a replacement balustrade with turned balusters. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light surmounted by a transom and flanked by paneled sidelights. There is a shed-roofed dormer on the north façade that is pierced by 1/1, vinyl, double-hung sash windows. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is side gable clad is asphalt shingles. There is a one-story, projecting, canted bay on the east elevation with windows on the canted walls only. There is a one-story, gable-roofed ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **428 West 27th Street**
PROPERTY NAME: House, 428 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0409
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1906. It incorporates a brick foundation and wood frame structural system clad in vinyl siding on the first story and aluminum siding on the second story. The south façade features a one-story, four-bay porch with an asphalt-shingled, hipped roof; and replacement wood posts and balustrade. The primary entrance is comprised of a single-leaf, wood door with a storm door. There is a projecting, squared bay surmounted by an asphalt-shingled, hipped roof on the west end of the second story façade which is supported by the west end of the porch. The house features 9/6, metal, double-hung sash windows. The roof is deck-on-hip clad in asphalt shingles with wide eaves. There are hip-roofed dormers on the south façade and east and west elevations. The dormers feature 1/1, metal, double-hung sash windows or vents.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1970. It incorporates a concrete block structural system clad in brick veneer. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **431 West 27th Street**
PROPERTY NAME: House, 431 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1950
DHR NUMBER (S): 122-5087-0410
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1950. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in aluminum siding. The north façade features a rowlock course brick veneer watertable. The north façade also features a stoop with parged brick stairs accessing the primary entrance surmounted by a gable-roofed overhang supported by carved wood brackets. The primary entrance is comprised of a single-leaf, wood, paneled door with two lights and a storm door. The house features individual and paired, 1/1, metal, double-hung sash windows with storm windows. There is also an oversized, fixed, metal window on the west end of the façade. Non-functional shutters flank the façade windows. The roof is side gable clad in asphalt shingles. The house features a central, interior, brick chimney with a cast clay chimney pot.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **433 West 27th Street**
PROPERTY NAME: House, 433 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1996
DHR NUMBER (S): 122-5087-0411
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1996. It incorporates a brick foundation clad and a wood frame structural system clad in vinyl siding. The north façade features a partially incorporated and slightly projecting, one-story, two-bay porch with an asphalt-shingled, gable roof; turned, wood posts; and a wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a storm door. The house features 6/6, aluminum, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows. The roof is gable clad in asphalt shingles. There is single-leaf door on the east elevation that is accessed by wood stair with a wood balustrade.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **437 West 27th Street**
PROPERTY NAME: House, 437 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1911
DHR NUMBER (S): 122-5087-0412
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1911. It

incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, two bay porch with an asphalt-shingled, hipped roof with an intersecting gable exhibiting cornice returns over the porch entrance. The porch features Tuscan, wood columns and wood balustrade. The porch is in a deteriorated condition. The primary entrance is comprised of a single-leaf, wood, paneled door with an oval-shaped light surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is hip clad in asphalt shingles. There is a gable-roofed dormer on the north façade that features a partially boarded, Palladian window grouping. The central window has a rounded arch upper sash and there are 4-light, casement windows flanking it. The hipped-roofed dormers on the east and west elevations feature paired, wood, double-hung sash windows. The house features an interior, brick chimney with a raised brick band at the top on the west elevation. There is a one-story porch on the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **512 West 27th Street**
PROPERTY NAME: Duplex, 512 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1929
DHR NUMBER (S): 122-5087-0413
DESCRIPTION (S):
This is a two-story duplex designed in the Late 19th and Early 20th Century American Movement style and constructed in 1929. It incorporates a brick foundation and wood frame structural system. The first story of the duplex is clad in asbestos siding and the second story is clad in wood shingles. The south façade features a two-story, two-bay porch that is incorporated under the main roof. The porch features brick piers and wood lattice balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door. There is also a single-leaf door accessing the second story porch. The house features individual and paired, 6/1, wood, double-hung sash windows. The roof is cross gable clad in asphalt shingles. The gable on the façade is clad in vertically hung vinyl siding. There is a two-story porch on the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **516 West 27th Street**
PROPERTY NAME: House, 516 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-0414
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1922. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two bay porch that is incorporated under the main roof. The porch features battered, wood piers resting on brick pedestals with limestone caps and a wrought iron balustrade. The primary entrance is comprised of a single-leaf, wood door with a storm door. The second story façade features a shed-roofed dormer that shelters a second story porch. The porch features replacement, wood posts resting on vinyl-clad pedestals and a wood balustrade.

There is a single-leaf, wood door with lights and a storm door accessing the second story porch. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles. There is a two-story, flat-roofed porch on the north elevation.

- This is a one-story garage designed in the late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a concrete slab foundation and wood frame structural system clad in weatherboard siding. The roof is hip clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **520 West 27th Street**
PROPERTY NAME: House, 520 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-0415
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1916. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The south façade features an enclosed, one-story porch clad in asbestos siding. The porch features an asphalt-shingled, hipped roof; a boxed cornice; and wide eaves and frieze. The porch is pierced by 1/1, metal, double-hung sash windows and the battered, wood piers are still visible. The porch also features awnings over the windows and door opening. The primary entrance is centrally located and is comprised of a single-leaf, wood, paneled door with a fan-shaped light and a storm door. The house features 6/1, wood, double-hung sash windows with screens. The roof is hipped clad in slate shingles with a wide frieze. The hip-roofed dormers on the south façade, and east and west elevations feature paired, 6/1, wood, double-hung sash windows. The house features interior, brick chimneys with tapered caps on the east and west elevations. There is a one-story, shed-roofed ell appended to the north elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a concrete slab foundation and wood frame structural system clad in asbestos siding. The door is vertical board and double leaf. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **522 West 27th Street**
PROPERTY NAME: House, 522 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-0416
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1916. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story,

three-bay porch with an asphalt-shingled, hipped roof; and wrought iron posts and balustrade. The primary entrance is centrally located and is comprised of a single-leaf, wood, paneled door with a fan-shaped light and a storm door. The house features 6/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in slate shingles. The hip-roofed dormers on the south façade and east and west elevations feature 1/1, wood, double-hung sash windows. The house features a central, interior, parged brick chimney. There is a one-story, shed-roofed ell appended to the north elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a concrete slab foundation and wood frame structural system clad in asbestos siding. The roof is gable clad in asphalt shingles. The door is board and batten, and double leaf.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **523 West 27th Street**
PROPERTY NAME: Apartment Building, 523 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: circa 1910
DHR NUMBER (S): 122-5087-0417
DESCRIPTION (S):
This is a two-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1910. It incorporates a parged brick foundation and wood frame structural system clad in vinyl siding. The north facade features a two-story, three-bay porch with an asphalt-shingled, deck-on-hip roof; and replacement wood posts and balustrade. There are three, centrally located entrances on the first story of the north façade. The entrances are comprised of single-leaf, wood, paneled doors with storm doors surmounted by transoms. There are also two, single-leaf doors surmounted by transoms accessing the second story porch. The building features 1/1, vinyl, double-hung sash windows. The building exhibits an asphalt-shingled, deck-on-hip-roofed block at the north end and a flat-roofed block of a lower height to the south. This block's roof is flat with a parapet. The building features an interior, brick chimney with a metal chimney pot on the west elevation. There is a two-story porch appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **525 West 27th Street**
PROPERTY NAME: House, 525 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-0027 122-0757
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1915. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, gable roof with a boxed cornice and cornice returns; and metal posts and balustrade. The primary entrance is comprised of a single-leaf, wood,

paneled door with a metal, storm door. The house features individual and paired, 3/1, wood, double-hung sash windows flanked by non-functional shutters. There is a two-light, wood, casement window in the facade gable. The roof is front gable clad in asphalt shingles with a boxed cornice and cornice returns on the north façade. The house features an interior, parged brick chimney on the west elevation. There is a one-story ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **526 West 27th Street**
PROPERTY NAME: House, 526 West 27th Street
OTHER NAME (S): House, 524 West 27th Street
CONSTRUCTION DATE: circa 1920
DHR NUMBER (S): 122-5087-0418
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed circa 1920. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The south façade features a one-story, one-bay porch with an asphalt-shingled, gable roof; and turned, wood posts and balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a fan-shaped light and a storm door. The house features 1/1, wood, double-hung sash windows with storm windows flanked by non-functional shutters. There is a fixed, octagonal-shaped, wood window centrally located on the second story façade. The roof is hipped clad in asphalt shingles with wide eaves and a wide frieze. There is a wood staircase on the east elevation accessing an alternate entrance.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a concrete slab foundation and wood frame structural system clad in asbestos siding. It features a single-leaf, wood, paneled door and a 4/1, wood, double-hung sash window. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **530 West 27th Street**
PROPERTY NAME: House, 530 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1987
DHR NUMBER (S): 122-5087-0419
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1987. It incorporates a concrete block foundation clad in brick veneer and wood frame structural system. The first story façade is clad in common bond brick veneer and the second story façade and side and rear elevations are clad in vinyl siding. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door. The house features individual and paired, metal, fixed windows flanked by non-functional shutters. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **533 West 27th Street**
PROPERTY NAME: House, 533 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0420
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and early 20th Century American Movement style and constructed in 1919. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, shed roof; and wrought iron posts and balustrade. The primary entrance is comprised of a single-leaf wood, paneled door with a diamond-shaped light and a storm door. The house features 6/1, wood, double-hung sash windows. The roof is side gable clad in asphalt shingle with wide eaves. There is a one-story, gable-roofed ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **535 West 27th Street**
PROPERTY NAME: House, 535 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0421
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and early 20th Century American Movement style and constructed in 1919. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, shed roof; battered, wood piers; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf wood, paneled door with two lights surmounted by a 5-light transom and flanked by 5-light sidelights. The house features 6/1, wood, double-hung sash windows. The roof is side gable clad in asphalt shingle. There is a one-story, shed-roofed ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **537 West 27th Street**
PROPERTY NAME: House, 537 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-0029 122-0756
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1914. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with a shed roof. The porch features battered, wood piers; and a wood balustrade. The primary

entrance is comprised of a single-leaf, wood door surmounted by a transom and flanked by paneled sidelights. The house features 6/1, wood, double-hung sash windows with storm windows. There is an asphalt-shingled, shed-roofed dormer on the façade. The roof is side gable clad in asphalt shingles. There is an interior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **600 West 27th Street**
PROPERTY NAME: Store/Dwelling, 600 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0422
DESCRIPTION (S):
This is a two-story store/dwelling designed in the Late 19th and Early 20th Century American Movement style and constructed in 1910. It incorporates a parged brick foundation and a wood frame structural system clad in vinyl siding. The first story of the south façade features an asphalt-shingled, hipped-roofed, boarded storefront. The primary entrance is a single-leaf, metal door with a light. The window openings on the storefront have bars applied to them. Other windows on the building include 1/1, wood double-hung sash with storm windows and wood, casement windows. The roof is gable clad in asphalt shingles with a boxed cornice and a wide frieze. The closed gable façade features a window opening that has been filled with a louvered vent. There is an intersecting, gable on the east elevation. This closed intersecting gable surmounts a two-story, four-bay porch with turned, wood posts and a wood paneled balustrade. There is a wood staircase appended to the west elevation that accesses a single-leaf, metal, paneled door on the second story. There is a plywood enclosure sheltering this second-story alternate entrance. There are double-leaf, metal, paneled doors accessing the enclosed area under the stair on the west elevation. There is a garage bay ell appended to the west elevation of the building. The ell is clad in plywood and features a flat roof with a parapet. The building features three, interior, parged brick chimneys.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1940. It incorporates a concrete slab foundation and wood frame structural system clad in asbestos siding. The gable roof is clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **606 West 27th Street**
PROPERTY NAME: House, 606 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1913
DHR NUMBER (S): 122-5087-0423
DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1913. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; and turned, wood posts and balusters. The primary entrance is comprised of a

single-leaf, metal door with a fan-shaped light and a wrought iron storm door. The house features 2/2, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles and is pierced by three hip-roofed dormers. The hip-roofed dormers feature paired, 2-2, double-hung sash windows with storm windows. The house features a central, interior, brick chimney. There is a one-story, flat-roofed ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **608 West 27th Street**
PROPERTY NAME: House, 608 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1900
DHR NUMBER (S): 122-5087-0424
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1900. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The house is comprised of two intersecting gable blocks with a two-story tower located at the southwest corner junction of the two gable blocks. The south façade features a one-story, wrap-around porch with an asphalt-shingled, hipped roof; brick piers; and a brick balustrade with open brickwork. The primary entrance is located on the south elevation of the tower, which is setback from the south façade wall plane. The entrance is comprised of a single-leaf, wood, paneled door with a storm door. The house features 1/1 and 4/4, wood, double-hung sash windows. There is a wood staircase appended to the west elevation accessing a second story entrance. The second story entrance is comprised of a single-leaf, wood, paneled door with a storm door. The roof is cross-gable clad in asphalt shingles. The tower roof is pyramidal and clad in asphalt shingles. The house features an interior, brick chimney with a corbelled cap on the east elevation. There is a one-story ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **609 West 27th Street**
PROPERTY NAME: Apartment Building, 609 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1963
DHR NUMBER (S): 122-5087-0425
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1963. It incorporates a concrete block foundation and concrete block structural system. The building is accessed on the east and west elevations by single-leaf, metal doors with lights. The building features metal, sliding windows with projecting, concrete sills. The roof is flat with a parapet coped in metal.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **612 West 27th Street**
PROPERTY NAME: House, 612 West 27th Street

OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-0426
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1915. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, shed roof; battered, wood piers resting on brick pedestals; and a wood balustrade. The primary entrance is comprised of a single-leaf, wood paneled door with boarded lights and a storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles with wide eaves, and brackets on the east and west elevations under the eaves. There is a shed-roofed dormer on the south façade that features a three, 1/1, wood, double-hung sash windows. The house features an exterior, brick chimney with a corbelled cap on the west elevation. The chimney has been parged above the roofline. There is a one-story ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **616 West 27th Street**
PROPERTY NAME: Duplex, 616 West 27th Street
OTHER NAME (S): Duplex, 614-616 West 27th Street
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0427
DESCRIPTION (S):
This is a two-story duplex designed in the Craftsman style and constructed in 1920. It incorporates a parged brick foundation and wood frame structural system clad in aluminum siding. The south façade features a one-story, two-bay porch with and asphalt-shingled, shed roof; battered, wood piers resting on parged brick pedestals; and a wood balustrade. There are two entrances located on the east end of the south façade. The entrances are comprised of single-leaf, wood doors with eight lights and storm doors surmounted by 4-light transoms. There is a projecting, squared bay on the east end of the second story façade. The squared bay features a tripartite window grouping of 6/1, wood, double-hung sash windows and is surmounted by a hipped-roof. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles with a wide frieze and brackets under the eaves. The brackets are paired at the building corners of the façade. The house features a central, interior, parged brick chimney. There is a one-story, projecting, shed-roofed block on the east elevation and a one-story ell appended to the north elevation.

- This is a garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a concrete slab foundation and wood frame structural system clad in aluminum siding. The garage features a single-leaf, wood door and a fixed, 6-light, wood window. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **618 West 27th Street**
PROPERTY NAME: House, 618 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0428
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, one-bay porch with an asphalt-shingled gable roof; battered, wood piers resting on parged brick pedestals; and a parged brick balustrade. The porch gable is clad in vertical board. The primary entrance is comprised of a single-leaf, wood, paneled door with a fan-shaped light and storm door flanked by partially paneled sidelights. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. The roof is gable clad in asphalt shingles with wide eaves. The façade gable is clad in vertical board and features a wood frieze and brackets under the eaves.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1950. It is clad in corrugated metal and the gable roof is clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **628 West 27th Street**
PROPERTY NAME: House, 628 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0429
DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1918. It incorporates a parged brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, three-bay porch sheltered by a shed roof. The porch features wood piers, wood balustrade, and a metal awning. The primary entrance is comprised of a single-leaf, wood door with a wrought iron storm door. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles. There is a hip-roofed dormer on the south façade that features paired, wood, casement windows. The house features an exterior, brick chimneys with a metal cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **632 West 27th Street**
PROPERTY NAME: House, 632 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0430
DESCRIPTION (S):

This is a one-and-one-half-story house designed in the Craftsman style and constructed 1920. It incorporates a brick foundation and a wood frame structural system. The first story is clad in vinyl siding and the second story is clad in wood shingles. The south façade features a one-story, two-bay porch incorporated under the main roof. The porch features wood piers resting on brick pedestals with limestone caps, a replacement, wood balustrade, and exposed wood rafters under the eaves. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a storm door. There is a tripartite window grouping of 1/1, wood, double-hung sash windows with storm windows on the first story façade. Other windows featured on the house include individual and paired, 1/1, wood, double-hung sash with storm windows. The roof is side gable clad in asphalt shingles with wide eaves. There is a shed-roofed dormer on the south façade that features a tripartite window grouping of 1/1, wood, double-hung sash windows with storm windows.

- This is a one-story shed designed in the Modern Movement and constructed circa 1950. It incorporates a wood frame structural system clad in vinyl siding and an asphalt-shingled gable with cornice returns. The shed features wood shingles in the gable and a single-leaf, metal, paneled door.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **638 West 27th Street**
PROPERTY NAME: Apartment Building, 638 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-0431
DESCRIPTION (S):
This is a two-story apartment building designed in the Colonial Revival Style and constructed in 1916. It incorporates a 5-course American bond brick foundation and a 5-course American bond brick structural system. The south façade is clad in common bond brick veneer. The south façade features two, two-story, one-bay porches sheltered under a common, asphalt-shingled, hipped roof. The porches feature Tuscan, wood columns on the second story resting on brick pedestals; a wood balustrade; and a wide frieze and cornice. The primary entrance is centrally located between the porches on the first story of the south façade. The entrance is comprised of a single-leaf, wood, paneled door with six lights surmounted by a boarded transom. There are also entrances accessing each of the four porches on the façade. These entrance are comprised of single-leaf, wood doors with nine lights and storm doors surmounted by transoms. The doors are flanked by 6/1, wood, double-hung sash windows. The building features 6/1, wood, double-hung sash windows with storm windows and rowlock brick sills. The roof is flat with a corbelled cornice on the façade. The parapet on the side elevations is coped in a rowlock brick course.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **700 West 27th Street**
PROPERTY NAME: House, 700 West 27th Street
OTHER NAME (S): Duplex, 700-702 West 27th Street
CONSTRUCTION DATE: 1995
DHR NUMBER (S): 122-5087-0432

DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1995. It exhibits Colonial Revival elements. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof and wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door flanked by 5-light sidelights. The house features individual and paired, 6/6, metal, double-hung sash windows. The roof is gable clad in asphalt shingles. The closed gable on the façade features a circular, louvered vent.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1995. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. There is an overhead track door on the east elevation. The roof is gable clad in asphalt shingles.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **706 West 27th Street**
PROPERTY NAME: House, 706 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0433
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and wood frame structural system clad in weatherboard. The south façade features a two-story, two-bay porch. The first story of the porch features battered, wood piers resting on brick pedestals, a replacement, wood balustrade, and a false shed roof on the façade and side elevations. The primary entrance is comprised of a single-leaf, wood, paneled door with a wrought iron storm door. There is a shed-roofed dormer on the south façade, which gains access to the second story of the porch. The second story is clad in vinyl siding. The second story porch features clustered, squared, wood posts and a shed roof. There is a single-leaf, metal, paneled door accessing the second story porch. The house features individual and paired, 6/6, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles with wide eaves. Projecting outriggers are visible on the side elevations of the main roof and porch roofs. The house features an exterior, brick chimney with a soldier-course-detailed cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **708 West 27th Street**
PROPERTY NAME: House, 708 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1925
DHR NUMBER (S): 122-5087-0434
DESCRIPTION (S):
This is a two-story house designed in the Craftsman-Colonial Revival-hybrid style and constructed in 1925. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade

features a two-story, three-bay porch with an asphalt-shingled, gable roof; battered, wood piers; and a replacement, wood balustrade. The porch gable is clad in vinyl, faux-fishscale shingled siding. The primary entrance is comprised of a single-leaf, wood, paneled door with a wrought iron storm door. There is a shed-roofed dormer on the south façade features a single-leaf, wood door with multiple lights and a storm door accessing the second story porch. The house features individual and paired, 6/6, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles with wide eaves and projecting outriggers on the side elevations. The house features an interior, parged brick chimney with a squared cap on the east elevation.

- This is a one-story shed designed in Late 19th and Early 20th Century American Movement style and constructed circa 1930. It incorporates a wood frame structural system clad in vertical board and a gable roof clad in asphalt shingles. The shed features a single-leaf, metal door.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **710 West 27th Street**
PROPERTY NAME: House, 710 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0435
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1912. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The second story façade is clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; battered, wood piers; a replacement, wood balustrade; and a metal awning. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light and storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The windows on the second story façade are surmounted by a common, metal awning. The roof is hipped clad in asphalt shingles. The house features an interior, brick chimney on the east elevation. There is a one-story ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **711 West 27th Street**
PROPERTY NAME: House, 711 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1924
DHR NUMBER (S): 122-5087-0436
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1924. It incorporates a parged brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, gable roof; battered, wood piers resting on parged, brick pedestals; and a wood balustrade. The primary entrance is comprised of a single-leaf, wood door with a wrought iron storm door. The house

features 1/1, metal, double-hung sash windows. The roof is gable clad in asphalt shingles. There are gable-roofed, wall dormers on the east and west elevations that feature boarded window openings.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **714 West 27th Street**
PROPERTY NAME: Apartment Building, 714 West 27th Street
OTHER NAME (S): Apartment Building, 714-718 West 27th Street
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0437
DESCRIPTION (S):
This is a two-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a parged brick foundation and a wood frame structural system clad in replacement, horizontal wood siding. The south façade features two, two-story, one-bay porches with a common, asphalt-shingled, hipped roof with exposed wood rafters under the eaves. The porches are comprised of battered, wood piers resting on parged, brick pedestals and vertical board-clad balustrades. The primary entrance is centrally located on the first story of the façade between the two porches. The entrance is comprised of a single-leaf door. There are also single-leaf, wood, paneled doors with six lights and storm doors accessing each of the four apartment unit porches. The apartment building features paired and individual, 6/1, wood, double-hung sash windows with storm windows. The roof is flat with a parapet that is stepped on the east and west elevations. There are recessed stairwells that break the wall planes on the east and west elevations.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **715 West 27th Street**
PROPERTY NAME: Duplex, 715 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0438
DESCRIPTION (S):
This is a two-story duplex designed in Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a brick foundation and wood frame structural system clad in wood shingles. The north façade is clad in aluminum siding. The north façade features a two-story, two-bay porch incorporated under the main roof. The porch is comprised of square, wood posts and a plain balustrade on the first story, and slender, wood posts and a wood lattice balustrade on the second story. There are entrances to the duplex located on the first story façade at the east and west ends. The entrances are comprised of single-leaf, metal, paneled, doors with storm doors. There is a single-leaf, wood, paneled door with nine lights and a storm door accessing the second story porch. The duplex features individual and paired, 6/1, wood, double-hung sash windows with storm windows. The roof is Jerkinhead gable clad in asphalt shingles. The façade gable is clad in wood shingles. There is a two-story porch located on the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **717 West 27th Street**
PROPERTY NAME: House, 717 West 27th Street
OTHER NAME (S): Yale Apartments, 717-719 West 27th Street
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-0439
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1916. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; replacement, wood posts and balustrade; and a metal awning. The primary entrance is comprised of a single-leaf, metal, six-paneled door with a storm door. The house features 1/1, wood, double-hung sash windows with storm windows. The windows on the second story façade are surmounted by a common metal awning. The roof is hipped clad in asphalt shingles. There is a hip-roofed dormer on the north façade that features a replacement, sliding window. The sliding window has a single-pane and a six-light pane. There is a one-story ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **719 West 27th Street**
PROPERTY NAME: House, 719 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1930
DHR NUMBER (S): 122-5087-0440
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1930. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two bay porch with an asphalt-shingled, shed roof; battered, wood piers resting on brick pedestals, and a wood balustrade. The primary entrance is comprised of a single-leaf, 4-panel, wood door with a storm door. The façade features paired, 6/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles with wood brackets under the rakes. There are false eaves with brackets appended to the east and west elevations of the building.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system clad in vinyl siding. The door is 6-panel and metal. The roof is side gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **720 West 27th Street**
PROPERTY NAME: House, 720 West 27th Street
OTHER NAME (S): Apartment Building, 720 West 27th Street
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0441

DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1906. It incorporates a parged brick foundation and a wood frame structural system. The south façade is clad in weatherboard siding and the side and rear elevations are clad in asbestos siding. The south façade features a wrap around porch that has been enclosed on the east end of the first story and a one-bay porch on the second story. The first story porch includes an asphalt-shingled, hipped roof; a wide frieze; paneled, wood posts; replacement, wood balustrade; and engaged, wood columns. There are three entrances on the first story façade; one on the east end and two on the west end. The east end entrance is comprised of a single-leaf, wood door. The westernmost west entrance is comprised of a single-leaf, wood, paneled door with four lights. The easternmost west entrance is comprised of a single-leaf, wood, paneled door with a storm door. The second story porch is comprised of a flat roof with a cornice and wide frieze; a partially enclosed balustrade; and plain, wood posts. There is a single-leaf, wood door accessing the second story porch. The houses features 1/1, wood, double-hung sash windows with storm windows. The first story façade windows are flanked by non-functional shutters. The roof is hipped-cross-gable clad in slate shingles with a wood cornice and wide frieze. There is a hip-roofed dormer on the south façade that features paired, replacement, 1/1, vinyl, double-hung sash windows. The east end of the first story wraparound porch is clad in plywood. There is a projecting, canted bay on the east elevation surmounted by a closed gable. There is a parged, brick wall appended to the east elevation of the house extending east.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **723 West 27th Street**
PROPERTY NAME: House, 723 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1936
DHR NUMBER (S): 122-5087-0442
DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1936. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The north façade features a projecting, one-story, one-bay porch with an asphalt-shingled, gable roof on the west end. The porch is comprised of battered, wood piers resting on brick pedestals; a wood balustrade; and a metal awning. The primary entrance is comprised of a single-leaf, wood door with a storm door. The house features individual and paired, 6/6, wood, double-hung sash windows with storm windows. The metal awning on the porch extends to the east and surmounts the first story façade windows. The roof is gable clad in asphalt shingles with exposed wood rafters under the eaves on the east and west elevations. There are intersecting gables on the east and west elevations that feature 6/6, wood, double-hung sash windows with storm windows and brackets at the rakes. Brackets are also features on the façade and porch gable roofs.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1940. It incorporates a brick foundation and brick structural system. It features a sliding, wood door and a fixed, 4-light, wood window. The roof is gable clad in asphalt shingles. The façade gable is clad in wood shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **724 West 27th Street**
PROPERTY NAME: Apartment Building, 724 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0443
DESCRIPTION (S):
This is a two-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features two, two-story, one-bay porches incorporated under the main roof. The porch is comprised of a flat roof with a cornice; brick piers; and wood balustrades. The primary entrance is centrally located between the porches on the first story and is comprised of a single-leaf, wood, paneled door. There are single-leaf, wood, 15-light doors accessing the porches on the façade. The building features individual and paired, 6/1, wood, double hung sash windows with storm windows. The roof is flat and clad in asphalt shingles. There are interior, parged brick chimneys on the east and west elevations.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **726 West 27th Street**
PROPERTY NAME: House, 726 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1928
DHR NUMBER (S): 122-5087-0444
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1928. It incorporates a brick foundation and wood frame structural system clad in wood shingles. The south façade features a one-story, two bay porch with an asphalt-shingled, side gable roof on the east end and a shed roof at the west end. The east portion of the porch roof is a porte-cochere. The porch entrance is on the west end. The porch and porte-cochere are comprised of battered, wood piers resting on brick pedestals and with a wood balustrade on the porch. The primary entrance is comprised of a single-leaf, wood, paneled door with a light and wrought iron storm door. The house features individual and paired, 1/1, metal, double-hung sash windows. The roof is gable clad in asphalt shingles with brackets at the gable ends and carved outriggers and ridge beams at the gable apexes. There are projecting, squared bays surmounted by intersecting gables on the east and west elevations.

- This is a one-story shed designed in the Craftsman style and constructed circa 1930. It incorporates a wood frame structural system clad in wood shingles. The shed features a single-leaf, metal, paneled door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **729 West 27th Street**

PROPERTY NAME: House, 729 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1927
DHR NUMBER (S): 122-5087-0445
DESCRIPTION (S):
This is a one-story house designed in the Bungalow style and constructed in 1927. It incorporates a parged brick foundation and wood frame structural system clad in wood shingles. The north façade features an entrance surmounted by a gable-roofed overhang with wood brackets and brick stairs. The primary entrance is comprised of a single-leaf, wood, 15-light door with a storm door flanked by five-light sidelights. There is an incorporated, one-bay porch on the northwest corner. The porch is comprised of a battered, wood pier resting on a parged brick pedestal; a wood balustrade; and a metal awning. There is a single-leaf, wood door accessing the corner porch. The house features individual and paired, 1/1, wood, double-hung sash windows. The block features paired, 1/1, wood, double-hung sash windows and exposed rafters under the eaves. The roof is Jerkinhead gable clad in asphalt shingles with exposed wood rafters on the north façade. There is a one-story, gable-roofed ell appended to the south end of the west elevation. The ell features a single-leaf door and exposed rafters under the eaves. There is a Jerkinhead-gable-roofed dormer on the east end of the north façade forming a second or half story.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **809 West 27th Street**
PROPERTY NAME: House, 809 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0446
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features an enclosed, one-story, two-bay porch. The porch is clad in vinyl siding and features battered piers, resting on brick pedestals; and a cornice with a wide frieze. The porch is pierced by a single-leaf, metal storm door and 1/1, metal, double-hung sash windows. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in slate shingles with wide eaves. There is a hip-roofed dormer on the north façade that features paired, wood, casement windows. The house features a central, interior, parged brick chimney. There is a one-story, shed-roofed ell appended to the south elevation. The ell features a projecting, canted, bay window and single-leaf door surmounted by a metal awning on the west elevation.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1990. It incorporates a wood frame structural system clad in vinyl siding. It features a single-leaf door and a vinyl window flanked by non-functional shutters. The roof is side gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **810 West 27th Street**
PROPERTY NAME: House, 810 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-0447
DESCRIPTION (S):
This is a one-and-one-half story Bungalow constructed in 1922. It incorporates a stuccoed brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, one-bay porch incorporated under the main roof at the southeast corner. The porch features a wrought-iron balustrade and wrought iron posts. The primary entrance is comprised of a single-leaf, wood, paneled door with a storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The windows on the façade are flanked by non-functional shutters. The roof is side gable clad in asphalt shingles with wide eaves. There is a shed-roofed dormer on the south façade that features paired, 1/1, wood, double-hung sash windows with storm windows flanked by non-functional shutters.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **812 West 27th Street**
PROPERTY NAME: Apartment Building, 812 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 2000
DHR NUMBER (S): 122-5087-0448
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 2000. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system. The first story of the building is clad in common bond brick veneer and the second story is clad in vinyl siding. The south façade features eight entrances accessing each of the apartment units. These entrances are comprised of single-leaf, metal, paneled doors with wrought iron storm doors. There is a wood stair leading to the cantilevered wood balcony with wood balustrade on the second story, which is appended to the façade. The building features individual and paired, 1/1, metal, double-hung sash windows. The first story windows feature rowlock brick sills. Air conditioning units pierce the façade wall. The roof is side gable clad in asphalt shingles. The center portion of the roof extends over the balcony sheltering the second story entrances on the south facade. The east and west ends of the roof are lower than the main roof.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **813 West 27th Street**
PROPERTY NAME: House, 813 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-0449
DESCRIPTION (S):

This is a one-story Bungalow constructed in 1922. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The north façade features an enclosed, one-story porch clad in aluminum siding. The porch features an asphalt-shingled, shed roof; a battered, wood pier resting on a brick pedestal; a metal awning; and metal, double-hung sash windows flanked by non-functional shutters. The porch is accessed by a single-leaf, wood and screen door on the east elevation. The house features 6/1, wood, double-hung sash windows. The windows on the east elevation are surmounted by metal awnings. The roof is gable clad in asphalt shingles. The house features an interior, brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **817 West 27th Street**
PROPERTY NAME: Apartment Building, 817 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0450
DESCRIPTION (S):
This is a two-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a stuccoed brick foundation and a stuccoed brick structural system. There are two, two-story porches on the façade sharing a common roof which flanks the central entrance. The porches have been enclosed, but the common bond brick piers are visible on the north façade. The porches exhibit 6/1, wood, double-hung sash windows. The primary entrance is comprised of a single-leaf, wood paneled door that has been partially boarded and is flanked by paneled sidelights. The building features individual and paired, 6/1, wood, double-hung sash windows. The windows on the first story have been boarded with plywood. There is a wood, double-hung sash window surmounting the primary entrance on the second story. This window features a rounded-arch upper sash with Colonial Revival details. The roof is hipped clad in asphalt shingles and features a cornice with a wide frieze.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **820 West 27th Street**
PROPERTY NAME: House, 820 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-0451
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1914. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof with a boxed cornice; square, wood columns; pilasters; and a replacement balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with lights surmounted by a 6-light transom and flanked by 8-light and 2-panel sidelights. The house features individual and paired, 6/1, metal, double-hung sash windows. The roof is hipped clad in asphalt shingles. There are gable-roofed dormers on the façade and east elevation. The dormers feature paired, 6-light, metal, casement windows.

The house features an interior, brick chimney with a corbelled cap on the east elevation and a parged, central interior chimney. There is a one-story ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **821 West 27th Street**
PROPERTY NAME: House, 821 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1928
DHR NUMBER (S): 122-5087-0452
DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1928. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade is clad in vertically hung vinyl siding and features a one-story, three-bay porch incorporated under the extended main roof. The porch features brick piers, wood posts, and a wood balustrade. The primary entrance is centrally located and comprised of a single-leaf, metal, paneled door with a storm door. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles with wide eaves. There is a gable-roofed dormer on the north façade that features a tripartite window grouping of 1/1, wood, double-hung sash windows. The house features an exterior, brick chimney with a parged cap on the east elevation. There is a one-story porch appended to the south elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1930. It incorporates a brick foundation and brick structural system. The garage features a roll-up, garage door with lights. The roof is gable clad in asphalt shingles. The façade gable is clad in vinyl siding.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **824 West 27th Street**
PROPERTY NAME: House, 824 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1908
DHR NUMBER (S): 122-5087-0453
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1908. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, gable roof with wood brackets under the rakes; battered, wood piers; a ceiling fan; and a replacement balustrade. The primary entrance is comprised of a single-leaf, metal, 6-panel, door with a storm door. The house features individual and paired, metal, double-hung sash windows. The roof is gable clad in asphalt shingles with brackets under the rakes. There is a one-story, shed-roofed ell appended to the north elevation.

- This is a one-story shed designed in the Modern movement style and constructed circa 1970. It incorporates a wood frame structural system clad in vertical board siding and features a double-leaf, wood door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **825 West 27th Street**
PROPERTY NAME: House, 825 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1926
DHR NUMBER (S): 122-5087-0454
DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1926. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, gable roof; battered, wood piers resting on brick pedestals; plain, wood posts; and a replacement balustrade. The primary entrance is comprised of a single-leaf, wood door with a wrought-iron storm door. The house features individual and paired, 1/1, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles with wide eaves on the east and west elevations. There is a gable-roofed dormer on the north façade that features a paired window grouping. The house features an exterior, brick chimney with a cap on the west elevation. There is a shed-roofed ell appended to the south elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system clad in vinyl siding and features a double-leaf, wood door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **828 West 27th Street**
PROPERTY NAME: House, 828 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1923
DHR NUMBER (S): 122-5087-0455
DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1923. It incorporates a concrete block foundation and wood frame structural system clad stucco. The south façade features a one-story, one-bay porch incorporated under the main roof on the southwest corner. The porch features plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, wood door with a storm door located on the east elevation of the porch. The house features individual and paired, 3/1, wood, double-hung sash windows. The roof is side gable clad in asphalt shingles with wide eaves and brackets on the east and west elevations. There is a gable-roofed dormer on the north façade that features paired, 3/1, wood, double-hung sash windows and brackets under the rakes.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1940. It incorporates a wood frame structural system clad in asbestos siding. The garage features a single-leaf, wood door on a shed-roofed ell at the west end, and a roll-up, garage door on the east end. There is also a metal, sliding window located on the façade. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **830 West 27th Street**
PROPERTY NAME: Apartment Building, 830 West 27th Street
OTHER NAME (S): Valreine Apartments, 830-832 West 27th Street
CONSTRUCTION DATE: 1927
DHR NUMBER (S): 122-5087-0456
DESCRIPTION (S):
This is a two-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1927. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The south façade features two projecting, two-story, one-bay porches incorporated under the main roof. The porches feature plain, wood posts and balustrades. The primary entrance is centrally located and is comprised of a single-leaf, wood, door flanked by paneled sidelights. There are single-leaf, wood, paneled doors with lights and storm doors accessing each of the porches. The building features 1/1, wood, double-hung sash windows with storm windows. There is a 1/1, wood, double-hung sash window surmounting the main entrance on the second story. The roof is hipped clad in asphalt shingles with wide eaves.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **831 West 27th Street**
PROPERTY NAME: House, 831 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0457
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1920. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, shed roof; battered, wood piers resting on brick pedestals; and cast concrete balustrade. The primary entrance is comprised of a single-leaf, wood door with a storm door. The house features 1/1, metal, double-hung sash windows. The roof is gable clad in asphalt shingles with cornice returns on the north façade. There is a one-story, shed roofed ell appended to the south elevation.

- This is a one-story garage designed in the Modern Movement and constructed circa 1970. It incorporates a concrete block foundation and structural system. The west façade features a roll-up, wood, paneled, garage door. The windows have been filled with concrete block, but the rowlock brick sills are still visible. The roof is hipped clad in asphalt shingles and there is an exterior, brick chimney with a corbelled cap on the east elevation.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **834 West 27th Street**
PROPERTY NAME: House, 834 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0458
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt shingled, hipped roof; battered, wood piers resting on brick pedestals; and no balustrade. The primary entrance is comprised of a single-leaf, metal, 6-panel door. The second story façade features an enclosed, one-bay porch clad in vinyl siding, pierced by 1/1, metal, double-hung sash windows above the main porch. The enclosed porch has an asphalt-shingled, shed roof and paired, wood posts. The house features 1/1, wood, double-hung sash windows with storm windows. The windows on the first story façade are flanked by non-functional shutters. There is a projecting, one-story, squared bay with a shed roof on the west elevation. The roof is side gable clad in asphalt shingles with wide eaves on the east and west elevations. There is a one-story, shed-roofed ell appended to the north elevation.

- This is a garage designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, roll-up garage door on the west elevation. The roof is side gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **900 West 27th Street**
PROPERTY NAME: House, 900 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1926
DHR NUMBER (S): 122-5087-0459
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1926. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The south façade features a one-story, three bay porch with a slate-shingled, gable roof, battered, wood piers resting on brick pedestals; a wood balustrade; and metal awning. The primary entrance is centrally located and comprised of a single-leaf, wood, paneled door with a wrought iron storm door. The house features 1/1, wood, double-hung sash windows with storm windows; and multi-light windows. The roof is gable clad in slate shingles. There is a projecting, gable-roofed block on the east elevation. The house features an exterior, brick chimney with a corbelled cap on the east elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1930. It incorporates a wood frame structural system clad in asbestos siding and features a wood, roll-up, garage door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **901 West 27th Street**
PROPERTY NAME: House, 901 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1923
DHR NUMBER (S): 122-5087-0460
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1923. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, shed roof; battered, wood piers; a replacement, wood balustrade; and a metal awning. The primary entrance is comprised of a single-leaf, wood, paneled door with a wrought iron storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The roof is gable clad in asphalt shingles and features brackets under the rakes on the north façade. The house features an exterior, brick chimney with a parged cap on the east elevation. There is a one-story, projecting, squared bay with a shed roof on the east elevation. There is a one-story, shed-roofed ell appended to the south elevation.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system clad in vinyl siding and features a single-leaf door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **903 West 27th Street**
PROPERTY NAME: House, 903 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1923
DHR NUMBER (S): 122-5087-0461
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1923. It incorporates a brick foundation and wood frame structural system clad in wood shingles. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; battered, wood piers resting on brick pedestals; a wood balustrade; and a wide frieze. The primary entrance is comprised of a single-leaf, wood, paneled door with nine lights and a storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles with wide eaves. The house features a hip-roofed dormer on the north façade that features paired, 6-light, wood, casement windows and exposed rafters under the eaves.

- This is a one-story garage designed in the Craftsman style and constructed circa 1930. It incorporates a wood frame structural system clad in wood shingles and features a wood, garage door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **904 West 27th Street**
PROPERTY NAME: House, 904 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1924
DHR NUMBER (S): 122-5087-0462
DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1924. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, three-bay porch incorporated under an asphalt-shingled, shed roof. The porch features stuccoed, battered piers resting on brick pedestals and a wrought iron balustrade. The primary entrance is centrally located and comprised of a single-leaf, wood, paneled door with a light and a storm door. The house features individual, paired, and tripartite, 6/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles with wide eaves and brackets at the building corners. There is a gable-roofed dormer on the south façade that features paired, 2-light, wood, casement windows and brackets under the rakes. There is a one-story, gable-roofed addition appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **907 West 27th Street**
PROPERTY NAME: House, 907 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1924
DHR NUMBER (S): 122-5087-0463
DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1924. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, three-bay porch incorporated under the main roof. The porch features battered, wood piers resting on brick pedestals; a wood balustrade; and a metal awning. The primary entrance is centrally located and comprised of a single-leaf, wood, paneled door with a storm door. The house features individual and paired, 1/1, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles with wide eaves and brackets on the roof rakes. There is a gable-roofed dormer on the north façade that features paired, 1/1, vinyl, double-hung sash windows.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1930. It incorporates a wood frame structural system clad in wood shingles and features a double-leaf, wood, garage door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **908 West 27th Street**
PROPERTY NAME: House, 908 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1926
DHR NUMBER (S): 122-5087-0464
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1926. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The south façade features a one-story, two-bay porch with a shed roof. The porch features battered, wood piers, and a wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door. The second story façade is comprised of an oversized, gable-roofed dormer. The gable-roofed dormer features brackets under the rakes. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles with wide eaves and brackets on the rakes. The house features a one-story, projecting, shed-roofed block on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **909 West 27th Street**
PROPERTY NAME: House, 909 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1925
DHR NUMBER (S): 122-5087-0465
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1925. It incorporates a parged brick foundation and wood frame structural system clad in aluminum siding. The north façade features a one-story, one-bay porch incorporated under the main roof. The porch features parged brick piers; and a replacement, wood balustrade. The primary entrance is centrally located and comprised of a single-leaf, wood, paneled door with a storm door. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is gable clad in asphalt shingles with brackets under the rakes. There is a projecting, squared, gable-roofed block on the west elevation. The house features a central, interior, brick chimney with a metal chimney pot.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1930. It incorporates a wood frame structural system clad in aluminum siding and features a double-leaf, wood door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **910 West 27th Street**
PROPERTY NAME: House, 910 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1925

DHR NUMBER (S): 122-5087-0466
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1925. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, shed roof; square, wood columns; and no balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a wrought iron storm door. The house features individual and paired, 1/1, wood windows. The roof is cross-gable clad in asphalt shingles. There is an exterior, brick chimney with a corbelled cap on the west elevation. There is a one-story, projecting, squared bay with a shed roof on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **911 West 27th Street**
PROPERTY NAME: House, 911 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-0467
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1922. It incorporates a brick foundation and wood frame structural system. The first story is clad in vinyl siding and the second story is clad in wood shingles. The north façade features a one-story, four-bay porch incorporated under the main roof. The porch features replacement, wood posts and balustrade. The primary entrance is comprised of a single-leaf, wood door with a storm door. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. The second story façade and north elevation feature shed-roofed dormers. The roof is side gable clad in asphalt shingles with wide eaves and exposed outriggers. The house features an exterior, brick chimney with a cap on the east elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1930. It incorporates a wood frame structural system clad weatherboard and features a double-leaf, wood door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **914 West 27th Street**
PROPERTY NAME: House, 914 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0468
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1919. It incorporates a parged brick foundation and wood frame structural system clad in asbestos siding. The south façade features a one-story, one-bay porch with replacement posts and balustrade. The west portion of the porch has been enclosed. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door. The house

features individual and paired, 6/6, wood windows with storm windows. The windows on the first-story façade of the enclosed porch are surmounted by a metal awning. The roof is gable clad in asphalt shingles with cornice returns on the south facade. There is a fixed, wood, fan-shaped window with an articulated keystone on the façade gable.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **915 West 27th Street**
PROPERTY NAME: House, 915 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1950
DHR NUMBER (S): 122-5087-0469
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Modern Movement style and constructed in 1950. It incorporates a concrete block foundation and a wood frame structural system clad in vinyl siding. The primary entrance is accessed by concrete stairs with a wood balustrade and is surmounted by an asphalt-shingled, gable-roofed overhang supported by braces. The primary entrance is comprised of a single-leaf, metal, paneled door with two lights and a 12-light storm door. The house features individual and paired, 6/6, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **916 West 27th Street**
PROPERTY NAME: House, 916 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0470
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1919. It incorporates a parged brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; and replacement, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door. The house features individual and paired, 6/6, wood windows with storm windows. The roof is side gable clad in asphalt shingles. The house features a central, interior, brick chimney with a brick cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **920 West 27th Street**
PROPERTY NAME: House, 920 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0471
DESCRIPTION (S):

This is a two-story house designed in the Craftsman style and constructed in 1920. It incorporates a parged brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood posts; and a vinyl-clad balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a wood screen door. The house features individual and paired, 6/1, wood windows with storm windows. The roof is hipped clad in asphalt shingles. The house features a central, interior, brick chimney with a cap. There is a one-story ell appended to the north elevation. The ell features a one-story porch that projects from the east elevation and is sheltered by an awning.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **921 West 27th Street**
PROPERTY NAME: House, 921 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1948
DHR NUMBER (S): 122-5087-0472
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1948. It incorporates a brick foundation and wood frame structural system clad in horizontal wood siding. The façade is clad in diagonal wood siding. The north façade features an enclosed, one-story porch clad in horizontal wood siding with an asphalt-shingled, gable roof. The porch is pierced by oversized, fixed, wood windows. The primary entrance is comprised of a single-leaf, wood door with three, vertical lights. The house features 1/1, wood, double-hung sash windows. The roof is gable clad in asphalt shingles. The house features an interior, brick chimney with a clay chimney pot. There is a boarded window in the apex of the gable façade.

- This is a shed designed in the Modern Movement style and constructed circa 1950. It incorporates a frame structural system clad in metal siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **923 West 27th Street**
PROPERTY NAME: House, 923 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1948
DHR NUMBER (S): 122-5087-0473
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1948. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; and wrought iron posts and balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a storm door. The house features 3/1, wood, double-hung sash windows with storm windows. The roof is gable clad in asphalt shingles. The house features an interior, brick chimney on the east roof pitch. There is a 3/1, wood, double-hung sash window in the apex of the gable façade. There is a one-story, gable-roofed ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **927 West 27th Street**
PROPERTY NAME: House, 927 West 27th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1992
DHR NUMBER (S): 122-5087-0474
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1992. This house is a modern adaptation of the Colonial Revival style. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, one-bay porch with an asphalt-shingled, gable roof; plain, wood posts; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a 12-light storm door. The house features individual and paired, 1/1, wood windows with storm windows. The roof is gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1001 West 27th Street**
PROPERTY NAME: Manufacturing Facility, 1001 West 27th Street
OTHER NAME (S): Tidewater Automotive Service Center
CONSTRUCTION DATE: 1951
DHR NUMBER (S): 122-5087-0476
DESCRIPTION (S):
This is a one-story manufacturing facility designed in the Modern Movement style and constructed in 1951. It incorporates a concrete slab foundation and a concrete block structural system. The building currently faces east to Killam Avenue. The east elevation features a single-leaf, metal door with a light surmounted by a metal awning. The south end of the east elevation features a sliding garage door. The building features metal, industrial sash windows with rowlock brick sills. The north facade is clad in brick veneer and features window and door openings that have been boarded or filled with concrete block. The west elevation features a roll-up, metal, garage door and a single-leaf metal door. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

West 28th Street

PROPERTY ADDRESS: **200 West 28th Street**
PROPERTY NAME: Church, 200 West 28th Street
OTHER NAME (S): Church of God in Christ-Garden of Prayer No. 3
CONSTRUCTION DATE: circa 1940
DHR NUMBER (S): 122-5087-0486
DESCRIPTION (S):
This is a one-story church designed in the Modern Movement style and constructed circa 1940. It incorporates a

concrete block foundation clad in brick veneer and a wood frame structural system. The church was originally clad in asbestos siding and is now clad in brick veneer. The church has a center steeple plan with a projecting, rectangular entrance block surmounted by a square tower. The entrance block is articulated with a wood cornice, soldier-course brick frieze and brick quoins. The main entrance is comprised of a double-leaf, wood door, which is recessed within the entrance block. The tower has a rounded-arch, louvered lantern with wood louvers and a rowlock and header course brick surround. The tower has a six-sided spire clad in metal sheets. The east and west elevations are punctuated by 6/6, wood, double-hung sash windows. Extending to the west is a hipped-roofed ell at the south corner. There is an intersecting gable block projecting south at the southwest corner. The gable end features a metal, single-leaf door. The roof is gable clad in asphalt shingles with a wood cornice and raking cornice.

- This is a one-story church school designed in the Modern Movement style and constructed in 1959. It incorporates a concrete block foundation clad in brick veneer and a concrete block structural system clad in brick veneer. The church school is appended to the east elevation of the southeast wing of the main church by a hyphen. The south façade features a single-leaf, metal, paneled door surmounted by a broken pediment and an intersecting gable. The building features paired, 6/6, metal, double-hung sash windows with rowlock brick sills flanked by non-functional shutters. The roof is gable clad in asphalt shingles with wide eaves. There is a parapet wall at the east end of the building.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **207 West 28th Street**
PROPERTY NAME: House, 207 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1924
DHR NUMBER (S): 122-5087-0487
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1924. It incorporates a brick foundation and wood frame structural system clad in weatherboard. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; Tuscan columns; and turned balusters. The primary entrance is comprised of a single-leaf, wood, 6-panel door surmounted by a boarded transom and flanked by boarded sidelights. At the east end of the original façade is a two-story, projecting, canted bay surmounted by a closed gable. The closed gable features a Palladian window with a 1/1, wood, double-hung sash window flanked by smaller, 1/1, wood double-hung sash windows. The windows on the first story have been boarded. The second story windows are 1/1, wood, double-hung sash with storm windows. The roof is hipped-cross-gable clad in slate shingles. There is an intersecting gable on the west elevation, which features a window opening. There is a two-story, hip-roofed, squared block appended to the northeast corner of the house. The block is clad in aluminum siding. The house features a central interior, brick chimney with a clay chimney pot.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **209 West 28th Street**
PROPERTY NAME: House, 209 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1902
DHR NUMBER (S): 122-5087-0488
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1902. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof and replacement, wood posts and balustrade. The primary entrance is comprised of a single-leaf wood door surmounted by a boarded transom. The house features 1/1, wood, double-hung sash windows with storm windows. There is a diamond-shaped, wood window on the west elevation. The roof is gable clad in asphalt shingles. There are intersecting gables on the east and west elevations. The closed gables on the façade and east and west elevations feature 2/2, wood, double-hung sash windows. The house features an interior brick chimney with a parged cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **212 West 28th Street**
PROPERTY NAME: House, 212 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0489
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; wood, turned posts; a spindle frieze; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf, wood door with a light and wrought iron storm door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows flanked by non-functional shutters. There is a two-story, projecting, canted bay on the east elevation surmounted by a closed gable. The roof is side gable clad in asphalt shingles. There is a gable-roofed dormer on the west elevation. The closed façade gable features paired, 1/1, wood double-hung sash windows with storm windows flanked by non-functional shutters. The gable on the east elevation features a 1/1, wood, double-hung sash window. The dormer also exhibits a 1/1, wood, double-hung sash window. The house features an interior brick chimney with a corbelled cap on the east roof pitch.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **213 West 28th Street**
PROPERTY NAME: House, 213 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1909

DHR NUMBER (S): 122-5087-0490
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1909. It incorporates a brick foundation and wood frame structural system. The north facade is clad in vinyl siding and the east and west elevations are clad in asbestos siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; boxed cornice; metal awnings; wood, turned posts; and a portion of the balustrade. The primary entrance is comprised of a single-leaf, door that has been boarded. There is a two-story, projecting, canted bay on the east end of the façade that is surmounted by a closed gable. The closed gable features a boarded window opening. The façade and first story windows have been boarded. The second story windows are 2/2, wood, double-hung sash with storm windows. The roof is hipped clad in asphalt shingles. The house features a central interior, brick chimney with a corbelled cap. There is a one-story, shed-roofed ell appended to the south elevation.

- This is a one-story garage designed in the Modern Movement style and constructed in 1930. It incorporates a wood frame structural system clad in asbestos siding. The roof is a hipped and clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **214 West 28th Street**
PROPERTY NAME: House, 214 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0491
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, shed roof; battered, wood piers on brick pedestals; and a replacement, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door surmounted by a boarded transom and flanked by boarded sidelights. The first story façade windows are tripartite, 6/6, wood, double-hung sash. The house features individual and paired, replacement, 1/1, metal, double-hung sash windows. There is a one-story, projecting, squared bay on the first story of the west elevation. The gable façade features a replacement 1/1, metal, double-hung sash window. The roof is gable clad in asphalt shingles with wide eaves on the east and west elevations.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **216 West 28th Street**
PROPERTY NAME: House, 216 West 28th Street
OTHER NAME (S): Apartment Building, 216 West 28th Street
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-0492
DESCRIPTION (S):

This is a two-story house designed in Craftsman style and constructed in 1914. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; and replacement, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with nine lights surmounted by a boarded transom. The house features paired, 1/1, wood, diamond-pane, double-hung sash windows with storm windows. There is a hip-roofed dormer on the façade that features paired, wood, casement windows and exposed wood rafters under the eaves. The roof is hipped clad in asphalt shingles. The house features a central, interior, parged brick chimney.

- This is a one-story shed designed in the Modern Movement and constructed in 1940. It incorporates a wood frame structural system clad in wood siding.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **218 West 28th Street**
PROPERTY NAME: House, 218 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-0493
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1914. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, shed roof; Tuscan columns; and exposed wood rafters under the eaves. The primary entrance is single-leaf and has been boarded. The first story windows have been boarded. The second story windows are paired, 1/1, wood, and double-hung sash with storm windows. There is a gable-roofed, wall dormer on the façade. The wall dormer features paired, 6/6, wood double-hung sash windows, a cornice, and cornice returns. The roof is gable clad in slate shingles. The house features an interior, parged brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **220 West 28th Street**
PROPERTY NAME: House, 220 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-0494
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1905. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; Tuscan columns; and a replacement, wood balustrade. There is a closed gable with wood shingles and raking cornice surmounting the porch entrance. The primary entrance is comprised of a single-leaf, metal, paneled, door surmounted by a transom. There is a two-story, projecting, bay surmounted by an oversized closed gable on the east end of the façade.

The closed gable in clad in wood shingles and features a Palladian window with a rounded arch, wood, double-hung sash window flanked by fixed, wood windows. The houses feature 1/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, canted bay on the east elevation surmounted by a closed gable. The roof is hipped-cross-gable clad in slate shingles with a wide frieze. There is an intersecting gable on the west elevation. The house features a central, interior, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **223 West 28th Street**
PROPERTY NAME: House, 223 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1992
DHR NUMBER (S): 122-5087-0495
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1992. It is designed to resemble a Colonial Revival style house. It incorporates a concrete block foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, one-bay porch with an asphalt-shingled, gable roof; and wood, Tuscan columns. The primary entrance is comprised of a single-leaf, door and storm door. The house features 1/1, metal, double-hung sash windows. The windows on the north façade are flanked by non-functional shutters. The roof is gable clad in asphalt shingles with wide eaves on the east and west elevations. There is a one-story porch appended to the south elevation.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **224 West 28th Street**
PROPERTY NAME: House, 224 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-0496
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1905. It incorporates a parged brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; a wrought iron balustrade; and wrought-iron-work added between and near the top of the columns. There are two entrances on the façade. The west end entrance is comprised of a single-leaf, metal, paneled door with a storm door. The east end entrance is comprised of a single-leaf, wood door. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is deck on hip clad in asphalt shingles. There are hip-roofed dormers on the façade and east and west elevations. The dormers feature paired, 1/1, wood, double-hung sash windows. There is a one-story, shed-roofed ell appended to the north elevation.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1940. It incorporates a wood frame structural system clad in asbestos siding and features a single-leaf door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **227 West 28th Street**
PROPERTY NAME: Apartment Building, 227 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1913
DHR NUMBER (S): 122-5087-0497
DESCRIPTION (S):
This is a two-story apartment building design in the Late 19th and Early 20th Century American Movement style and constructed in 1913. It incorporates a brick foundation and wood frame structural system clad in weatherboard siding. The north end of the building is built up with a deck on hip roof and exposed wood rafters under the eaves. The upper portion of this block is clad in wood shingles. The north façade features a two-story, three-bay porch with a slate-shingled, hipped roof; square, wood columns and balustrade; and exposed wood rafters under the eaves. There are four entrances centrally located and setback from the façade wall plane. The entrances are comprised of single-leaf, wood, paneled doors with storm doors. One of the doors features a diamond-shaped light. There are also two, single-leaf doors with storm doors accessing the second story of the porch. The building features replacement, 1/1, metal, double-hung sash windows flanked by non-functional shutters. The south end of the building features a low-pitch gable roof clad in standing-seam metal with exposed wood rafters under the eaves.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **228 West 28th Street**
PROPERTY NAME: House, 228 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-0498
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1914. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; turned balusters; and a dentiled cornice. The primary entrance is comprised of a single-leaf, wood, paneled door with a light and a storm door surmounted by a diamond-paned transom and flanked by diamond-paned sidelights with wood panels. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable features a 1/1, wood, double-hung sash window. There is also a two-story, projecting canted bay surmounted by a closed gable on the east elevation. This gable features a single-leaf, wood door with a light surmounted by a transom on the south canted wall of the first story. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is hipped-cross-gable clad in slate shingles with a wide frieze and boxed eaves. There is an intersecting gable on the west elevation. The house features two interior, brick, chimneys with a corbelled caps on the east roof pitch.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **230 West 28th Street**
PROPERTY NAME: House, 230 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0499
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1906. It incorporates a parged brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, four-bay porch with an asphalt-shingled, hipped roof; a boxed cornice; and replacement, wood posts and balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a light and a wrought iron storm door surmounted by a boarded transom. There is a two-story, projecting, squared bay on the east end of the façade. The squared bay is surmounted by a closed gable with wood, fishscale shingles and features a 1/1, wood, diamond pane, double-hung sash window. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles. There are gable-roofed dormers on the façade and east and west elevations. The dormers are clad in slate shingles and feature boxed cornices, and 1/1, wood, diamond pane, double-hung sash windows. The dormers on the façade and east elevation have closed gables with wood shingles, cornices, and raking cornices. The dormer on the west elevation has a cornice, raking cornices and cornice returns. The house features a central, interior chimney with a corbelled cap and an interior, parged brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **232 West 28th Street**
PROPERTY NAME: Duplex, 232 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0500
DESCRIPTION (S):
This is a two-and-one-half-story duplex designed in the Colonial Revival style and constructed in 1906. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; wide frieze; and replacement, wood posts and balustrade. There are two entrances on the façade. Both entrances are comprised of single-leaf doors with storm doors. The duplex features 1/1, metal, double-hung sash windows. The façade windows feature non-functional shutters. The roof is gable clad in asphalt shingles with cornice returns on the south facade. A sunburst pattern has been applied at the façade gable apex. There are intersecting gables on the east and west elevations. The duplex features four interior, brick chimneys located at each corner of the house. The chimneys on the southwest and northeast corners have corbelled caps. There is a one-story, shed-roofed ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **233 West 28th Street**
PROPERTY NAME: House, 233 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0501
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1912. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; a wide frieze; and replacement wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door surmounted by a boarded transom. The house features replacement, 6/6, metal, double-hung sash windows. The east end of the façade features a two-story, projecting, squared block with a projecting, two-story, pentagonal bay surmounted by a hip roof. The main roof is hipped clad in asphalt shingles with wide eaves and modillions. There are intersecting gables on the east and west elevations, which feature 6/6, metal, double-hung sash windows. There is also a gable-roofed dormer on the façade, which features a 6/6, metal, double-hung sash window. There is a two-story, projecting, canted bay surmounted by a closed gable and a one-story, shed-roofed, addition on the east elevation. The house features two, interior brick chimneys. The chimney on the east elevation features a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **234 West 28th Street**
PROPERTY NAME: House, 234 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-0502
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1922. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a partially enclosed, one-story, two-bay porch with an asphalt-shingled, gable roof. The west end of the porch is clad in vinyl siding and features screened window openings and a single-leaf, wood door with fifteen lights. The east end of the porch features a wood balustrade; and battered, wood piers resting on brick pedestals. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a wrought iron storm door flanked by sidelights. The house features 3/1, wood, double-hung sash windows. There is a one-story, projecting, gable-roofed, squared bay on the east elevation. The roof is gable clad in asphalt shingles. The house features an interior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **235 West 28th Street**
PROPERTY NAME: House, 235 West 28th Street
OTHER NAME (S):

CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0503
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The north façade features a two-story, two-bay porch with a shed roof extending from the main roof. The porch features battered, wood piers and a replacement, wood balustrade on the first story and paired, wood posts; and an asbestos-clad balustrade on the second story. The wood rafters are visible between the first and second story of the porch and under the porch roof on the façade. The primary entrance is comprised of a single-leaf, wood door. There is also a single-leaf, wood, door with lights accessing the second story porch. The house features individual and paired, 1/1, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles. There is a gable-roofed dormer on the façade clad in asphalt shingles. The dormer features paired, 1/1, wood, double-hung sash windows with storm windows. There is a one-story, projecting, squared, shed-roofed bay on the east elevation. The house features an interior, brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **236 West 28th Street**
PROPERTY NAME: House, 236 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-0504
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1916. It incorporates a brick foundation and wood frame structural system. The first story is clad in vinyl siding and the second story is clad in wood shingles. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; battered, wood piers resting on brick pedestals; a wood balustrade; and metal awnings. The primary entrance is comprised of a single-leaf, wood door with a diamond-shaped light and a storm door flanked by boarded sidelights. The house features individual, paired and tripartite, 1/1, wood, double-hung sash windows with storm windows. The second story façade windows are paired and surmounted by metal awnings. The roof is hipped clad in asphalt shingles with exposed wood rafter under the eaves. There are hip-roofed dormers on the façade and the east and west elevations. The dormers feature louvered, wood vents and exposed wood rafters under the eaves. There is a one-story, projecting, squared bay on the east elevation. The house features an interior, brick chimney with a metal cap on the east elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in wood, vertical board siding. The roof is hipped clad in asphalt.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **242 West 28th Street**
PROPERTY NAME: House, 242 West 28th Street

OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0505
DESCRIPTION (S):
This is a one-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1910. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The south façade features a one-story stoop. The stoop features a wrought iron balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door. The entrance is recessed from the façade wall. The house features 1/1, wood, double-hung sash windows. The roof is gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **300 West 28th Street**
PROPERTY NAME: House, 300 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1897
DHR NUMBER (S): 122-5087-0506
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1897. It incorporates a parged brick foundation and wood frame structural system clad in asbestos siding. The south façade features a one-story, wrap around porch with an asphalt-shingled, hipped roof; wood, turned posts; and a replacement, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a screen door surmounted by a transom. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable features a 1/1, wood double-hung sash window. The house features replacement, 1/1, metal, double-hung sash windows. There is a single-leaf door with wrought iron storm door on the east elevation. The east elevation features a two-story, projecting, canted bay surmounted by a closed gable. The west elevation features a two-story, squared, projecting block surmounted by a hipped roof. Appended to the west elevation is a small, two-story addition with a single-leaf, wood door surmounted by a flat-roofed overhang. The roof is hipped-cross-gable clad in slate shingles with banded, diamond-cut slate shingle patterning. The house features two, interior, brick chimneys with corbelled caps on the east elevation. There is also an interior brick chimney on the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **303 West 28th Street**
PROPERTY NAME: House, 303 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0079
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1906. It incorporates a brick foundation and a wood frame structural system. The first story façade is clad in common bond brick veneer and

the second story façade and side elevations are clad in vinyl siding. The north façade features a one-story, three-bay porch and porte-cochere under a common, asphalt-shingled, hipped roof. The porch features wood, turned posts resting on brick pedestals; plain, wood balustrade; and a spindlefrieze. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light. The house features 9/6, metal, double-hung sash windows. There is an intersecting gable clad in asbestos shingles that features a louvered vent and cornice returns on the façade. The roof is hipped clad in asphalt shingles. The house features an interior brick chimney on the east elevation. There is a one-story ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **304 West 28th Street**
PROPERTY NAME: House, 304 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 2004
DHR NUMBER (S): 122-5087-1645
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed 2004. It is designed to resemble a Colonial Revival-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The west end of the south façade features a one-story porch with an asphalt-shingled, shed roof. The primary entrance is comprised of a single-leaf, metal, paneled door. The house features individual and paired, 6/6, metal, double-hung sash windows. There is a two-story, projecting, squared bay on the east end of the façade that is surmounted by a gable roof. The bay features a roll-up, metal, paneled garage door. The façade gable is closed. The roof is gable clad in asphalt shingles with cornice returns.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **308 West 28th Street**
PROPERTY NAME: House, 308 West 28th Street
OTHER NAME (S): Duplex, 308 West 28th Street
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-0507
DESCRIPTION (S):
This is a three-story house designed in the Craftsman style and constructed in 1922. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a two-story, two-bay porch with an asphalt-shingled, shed roof. The first story porch is comprised of battered, wood piers; and a replacement, wood balustrade. The second story porch features wood piers and a vinyl-clad balustrade. There is a hipped-roof appended to the façade between the first and second story porches. The primary entrance is comprised of a single-leaf, metal, paneled door with two lights flanked by sidelights. There is a single-leaf, wood door with lights accessing the second story porch. The house features replacement, 6/6, metal, double-hung sash windows. The roof has been built up at the south end to a third story with a gable roof. There is a two-story, shed-roofed block appended to the north elevation and a one-story, shed-roofed ell appended to the

block. The east elevation features a one-story, squared, projecting bay.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **309 West 28th Street**
PROPERTY NAME: House, 309 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1894
DHR NUMBER (S): 122-5087-0077
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1894. It incorporates a brick foundation and a wood frame structural system. The first story of the north facade is clad in vinyl siding and the second story is clad in aluminum siding. The east elevation is clad in wood shingles and the west elevation is clad in aluminum siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; a concrete block foundation; and plain, wood posts. The primary entrance is comprised of a single-leaf door with a storm door. The house features 2/2, wood, double-hung sash windows with storm windows. The roof is shed clad in asphalt shingles with a wood cornice and scrolled cut brackets on the façade.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **310 West 28th Street**
PROPERTY NAME: House, 310 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1985
DHR NUMBER (S): 122-5087-0508
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1985. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, one-bay porch with an asphalt-shingled gable roof supported by wood posts. The primary entrance is comprised of a single-leaf door with a storm door. The house features paired, 1/1, metal, double-hung sash windows. The windows on the second story façade are flanked by non-functional shutters. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **313 West 28th Street**
PROPERTY NAME: House, 313 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1985
DHR NUMBER (S): 122-5087-0076
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1985. It incorporates a

concrete block foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story porch comprised of a gable-roofed overhang supported by plain, wood posts. The primary entrance is comprised of a single-leaf, metal, 6-panel door with a storm door. The house features paired, 1/1, metal, double-hung sash windows. Non-functional shutters flank the façade windows. The roof is gable clad in asphalt shingles. There is a one-story, shed-roofed ell appended on the south elevation.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **314 West 28th Street**
PROPERTY NAME: Apartment Building, 314 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1966
DHR NUMBER (S): 122-5087-0509
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1966. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in brick veneer. The primary entrance is comprised of a single-leaf, metal paneled door with a classical surround featuring a broken pediment. The building features 6/1, metal, double-hung sash windows with rowlock brick sills flanked by non-functional shutters. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **315 West 28th Street**
PROPERTY NAME: House, 315 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1909
DHR NUMBER (S): 122-5087-0075
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1909. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; and wrought iron posts and balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door surmounted by a transom. The house features 1/1, wood, Queen Anne windows with storm windows. There is a one-story, projecting, canted bay surmounted by a closed gable on the east end of the second story façade. The closed gable features a 1/1, wood, double-hung sash window. There are intersecting, closed gables on the east and west elevations. The roof is hipped-cross-gable clad in asphalt shingles with wide eaves. The house features an interior, parged brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **316 West 28th Street**
PROPERTY NAME: House, 316 West 28th Street
OTHER NAME (S):

CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0036 122-0617
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch incorporated under the main roof. The porch is comprised of wood, paneled piers resting on brick pedestals and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal door with a diamond-shaped light. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a shed-roofed dormer on the south façade that shelters a two-bay, second story porch. The second story porch is comprised of clustered, paneled piers resting on vinyl-clad pedestals and a plain, wood balustrade. There is a single-leaf door with a storm door accessing the second story porch. The roof is side gable clad in asphalt shingles. There is a two-story, low-pitch gable-roofed ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **318 West 28th Street**
PROPERTY NAME: House, 318 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0045 122-0618
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and wood frame structural system clad in weatherboard. The south façade features a one-story, two-bay porch incorporated under the main roof. The porch is comprised of wood piers resting on brick pedestals and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, 2-paneled door with six lights. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The first story façade windows are flanked by non-functional shutters. There is a shed-roofed dormer on the south façade that shelters a two-bay, second story porch. The second story porch is comprised of clustered, wood piers resting on aluminum-clad pedestals and a wood balustrade. There is a single-leaf, metal, paneled door accessing the second story porch. The roof is side gable clad in asphalt shingles. The east and west elevation gables are clad in wood shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **319 West 28th Street**
PROPERTY NAME: House, 319 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0074
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1912. It

incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and turned balusters. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable features a Palladian window of a 1/1, wood, double-hung sash window with a rounded arch upper light flanked by fixed, wood windows. There is a one-story, projecting, canted bay surmounted by a closed gable on the second story of the east elevation. There is an intersecting, closed gable and a single-leaf door with a storm door on the west elevation. The roof is hipped clad in asphalt shingles with a boxed cornice and wide eaves. The house features an interior, brick chimney with a corbelled cap on the east elevation and a central, interior chimney. There is a one-story ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **320 West 28th Street**
PROPERTY NAME: House, 320 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1909
DHR NUMBER (S): 122-5087-0510
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1909. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; and wrought iron posts and balustrade. The primary entrance is comprised of a double-leaf, wood, paneled door surmounted by a boarded transom. The house features 2/2 and 6/6, wood, double-hung sash windows with storm windows. There is a gable-roofed dormer on the façade that features a closed gable and a tripartite window. The window grouping is comprised of a boarded window flanked by 6-light, wood, casement windows. The roof is side gable clad in asphalt shingles. The raking cornices feature returns on the east and west elevations. There is a 2-story, shed-roofed ell appended to the north elevation. The house features an interior, brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **322 West 28th Street**
PROPERTY NAME: House, 322 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0511
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; and replacement wood posts and balustrade. The primary

entrance is comprised of a single-leaf, wood, paneled door with a storm door surmounted by a transom. The south façade also features a two-story, projecting, canted bay surmounted by a pressed metal shingle-clad tower at the east end. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in pressed metal shingles with a cornice and wide frieze. The house features two, interior, brick chimneys with corbelled caps on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **323 West 28th Street**
PROPERTY NAME: Apartment Building, 323 West 28th Street
OTHER NAME (S): Braemar Apartments
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-0073
DESCRIPTION (S):
This is a three-story apartment building designed in the Colonial Revival style and constructed in 1922. It incorporates a 7-course, American bond brick foundation and a 7-course, American bond brick structural system. The north façade is clad in common bond brick veneer and features polychrome brick quoins. The north façade features two, three-story, one-bay porches with a common asphalt-shingled, hipped roof flanking a central entrance. The porches feature brick piers and turned balusters. The porch roof features a boxed cornice with modillions under the eaves and a dentiled cornice that wraps the side elevations. The primary entrance is comprised of a single-leaf, metal, 6-panel door surmounted by a transom and a brick flat arch. There are single-leaf, wood doors with storm doors surmounted by transoms accessing each of the porches. The building features 9/1, wood, double-hung sash windows with storm windows surmounted by brick flat arches. The roof is flat with a parapet coped in a rowlock brick course. The building features a corbelled cornice. There is an interior, brick chimney embedded in the east elevation wall.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1930. It incorporates a brick foundation and a brick structural system. The garage features single-leaf, metal, paneled doors surrounded by vertical board siding. The roof is hipped clad in slate shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **324 West 28th Street**
PROPERTY NAME: House, 324 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0512
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with a standing-seam metal-clad, hipped roof; square columns and a replacement balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door surmounted by a 7-light transom and flanked

by sidelights. The lower portions of the sidelights have wood panels. The house features replacement, 1/1, metal, double-hung sash windows. The windows on the second story façade are surmounted by a shallow, asphalt-shingled, pent roof with modillions under the eaves. The main roof is gable clad in slate-shingles with modillions under the eaves. The façade gable features cornice returns and a carved vergeboard. There is a projecting, gable-roofed block on the second story of the west elevation. The block features cornice returns and modillions under the eaves and at its base between the first and second stories. There is a shed-roofed wall dormer on the east elevation. There is a one-story, shed-roofed ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **404 West 28th Street**
PROPERTY NAME: Apartment Building, 404 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1985
DHR NUMBER (S): 122-5087-0513
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1985. It incorporates a concrete block foundation and wood frame structural system clad in brick veneer. The south façade features a one-story, one-bay porch with an asphalt-shingled, gable roof and plain, wood posts and balustrade. The gable is clad in vinyl siding. There are three entrances on the south façade. Each entrance is comprised of a single-leaf, metal, paneled door. The building features 1/1, metal, double-hung sash windows with rowlock brick sills. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **409 West 28th Street**
PROPERTY NAME: House, 409 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 2003
DHR NUMBER (S): 122-5087-0514
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 2003. It incorporates a concrete block foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, turned post; and a wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door. There is a one-story, projecting, canted bay on the east end of the first story façade. The facade also features a two-story, projecting, squared bay surmounted by a gable on the second story of the west end. The squared bay features a 4/4, metal, double-hung sash window and cornice returns. The house features paired, 6/6, metal, double-hung sash windows. The roof is gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **410 West 28th Street**

PROPERTY NAME: Apartment Building, 410 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1964
DHR NUMBER (S): 122-5087-0522
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1964. It incorporates a concrete block foundation and wood frame structural system clad in brick veneer. The south façade features a boarded, single-leaf entrance surmounted by a projecting, metal overhang. The entrance is accessed by brick stairs. The windows have been boarded with plywood and the rowlock brick sills are visible. The roof is hipped clad in asphalt shingles with wide eaves.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **411 West 28th Street**
PROPERTY NAME: Apartment Building, 411 West 28th Street
OTHER NAME (S): Lee Apartments
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-0071
DESCRIPTION (S):
This is a two-story apartment building designed in the Colonial Revival style and constructed in 1914. It incorporates a brick foundation and structural system. The north façade features a two-story, three-bay porch under a flat roof with a central entrance. The porch features brick piers and wood balustrade. The porch roof features a cornice with modillions and a wide frieze that extends across the facade and around the side elevations. The façade features brick quoins at the corners and four entrances. There is a centrally located double-leaf entrance, which is recessed from the façade. There are single-leaf, metal, paneled doors on the east and west ends of the façade accessed by open stoops. There are also two, single-leaf, metal paneled doors centrally located on the second story that access the second story porches. The building features 1/1, wood, double-hung sash windows with limestone sills. The windows on the east and west elevations feature brick, jack arch lintels. The roof is flat with a stepped parapet on the east and west elevations. The parapet is coped in a rowlock brick course.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **414 West 28th Street**
PROPERTY NAME: House, 414 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-0515
DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The upper portion of the house is clad in wood shingles. The south façade features a one-story, three-bay porch with a shed roof extending from the main roof. The porch

features brick piers at the corners, wood posts on wood pedestals flanking the entrance; and a wood balustrade. There is an awning applied to the porch on the west elevation. The primary entrance is centrally located on the façade and is comprised of a single-leaf, wood door with a wrought iron storm door. The house features individual and paired, 3/1, wood, double-hung sash windows. Several of the windows on the west elevation are surmounted by awnings. There is a gable-roofed dormer on the south façade, which features a tripartite window of 4-light, wood, casement windows. The dormer is clad in wood shingles and has exposed wood rafters under the eaves and brackets on the rake. The roof is side gable clad in asphalt shingles with brackets on the rakes. The wood roof rafters are visible on the south façade. The house features an exterior, brick chimney with a metal cap on the west elevation. There is a one-story porch incorporated under the main roof on the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **416 West 28th Street**
PROPERTY NAME: House, 416 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-0083
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system. The first story is clad in weatherboard and the second story is clad in wood shingles. The south façade features a one-story, enclosed porch with a hipped roof with exposed, wood rafters. The porch is clad in wood punctuated by 6/6, metal, double-hung sash windows. The primary entrance is comprised of a double-leaf, plate glass door. The house features individual and paired, 6/2 and 6/6, wood, double-hung sash windows with storm windows. The roof is hipped clad in slate shingles with exposed, wood rafters under the eaves. There are hip-roofed dormers that features tripartite, 6/1, wood, double-hung sash windows and exposed, wood rafters under the eaves on the façade and the east elevation. The house features an interior, brick chimney with a corbelled cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **419 West 28th Street**
PROPERTY NAME: Church, 419 West 28th Street
OTHER NAME (S): Richardson Adult Care / Church of the Nazarene/Nursing Home, 419 West 28th Street
CONSTRUCTION DATE: 1946
DHR NUMBER (S): 122-5087-0070
DESCRIPTION (S):
This is a one-story church designed in the Modern Movement style and constructed in 1946. It incorporates a 5-course American Bond brick foundation and structural system. The building occupies an irregular, U-shaped footprint. The north façade features a projecting, central, gable-roofed, brick pavilion flanked by plate glass blocks. The pavilion features double-leaf, plate glass and metal doors surmounted by a header brick course and

flanked by brick-buttress walls. The blocks feature brick watertables and have rounded atriums. The side elevations features tripartite windows of 4/4, wood, double-hung sash windows surmounted by header brick courses and rowlock brick sills. Brick buttresses flank the window groupings on the east and west elevations. The central pavilion of the building only extends southward for half of the block. There are one-story, flat-roofed wings appended to the east and west elevations, which are set back from the street. The wings feature single-leaf, metal doors, and tripartite windows of 4/4, wood, double-hung sash windows surmounted by header brick courses and rowlock brick sills. The wings extend on a north-south axis to the south and abut West 27th Street. This creates two parallel wings on the south elevation. Both wings on the south elevation feature handicapped entrances with double-leaf, metal doors with 3 lights. The wings feature 2/2, metal, double-hung sash windows with rowlock brick sills. The roof is flat with a parapet coped in metal. The building features a central, interior brick chimney. This property has been converted to a nursing home.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **420 West 28th Street**
PROPERTY NAME: Apartment Building, 420 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1964
DHR NUMBER (S): 122-5087-0082
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1964. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in brick veneer. The building is oriented to the east. The east façade features two-story porch incorporated under the main roof. The porch features metal staircases, posts and balustrade. There are multiple, single-leaf entrance on the first and second story of the east façade. The roof is flat.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **424 West 28th Street**
PROPERTY NAME: House, 424 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1908
DHR NUMBER (S): 122-5087-0081
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1908. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; square, wood columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door surmounted by a boarded transom. The house features individual and paired, 2/2, wood, double-hung sash windows with storm windows. The roof is hipped clad in slate shingles with wide eaves.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1945. It incorporates a wood frame structural system clad in corrugated metal. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **425 West 28th Street**
PROPERTY NAME: House, 425 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1913
DHR NUMBER (S): 122-5087-0516
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1913. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, columns; saw-cut, wood balustrade; and a simplified-type of spindlefrieze. The primary entrance is comprised of a single-leaf, wood, paneled door surmounted by a transom. The north façade also features a two-story, projecting, canted bay surmounted by a closed gable on the west end. The closed gable features a wood, louvered vent. The house features 1/1, wood, double-hung sash windows with storm windows. There is an intersecting gable on the east elevation that features a wood, louvered vent. The house features a central, interior, parged brick chimney with a corbelled cap and an interior, brick chimney with a corbelled cap on the west elevation. The roof is hipped clad in asphalt shingles. There is a one-story, shed-roofed ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **426 West 28th Street**
PROPERTY NAME: House, 426 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1908
DHR NUMBER (S): 122-5087-0517
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1908. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, paneled posts; and a replacement, wood balustrade. The primary entrance is comprised of a single-leaf, wood door with a storm door surmounted by a transom and flanked on the east by a multi-light sidelight. The south façade also features a two-story, projecting, canted bay on the east end. The house features 1/1, wood, double-hung sash windows with storm windows. An asphalt-shingled, hipped roof overhang with brackets under the eaves is appended to the south façade above the second story windows and canted bay. There is a gable-roofed dormer on the west elevation that features paired, 1/1, wood, double-hung sash windows. The house features an interior, brick chimney on the east elevation. The roof is gable clad in asphalt shingles with a wide frieze on the east and west elevations.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **427 West 28th Street**
PROPERTY NAME: House, 427 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1913
DHR NUMBER (S): 122-5087-0518
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1913. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; and replacement posts and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door surmounted by a transom. The north façade also features a two-story, projecting, canted bay surmounted by a closed gable on the west end. The closed gable features a vinyl-clad vent. The house features 1/1, metal, double-hung sash windows. There is an intersecting gable on the east elevation. The house features a central, interior, brick chimney with a cap and an interior, brick chimney with a corbelled cap on the west elevation. The roof is hipped clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **432 West 28th Street**
PROPERTY NAME: House, 432 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-0080 122-0620
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1905. It incorporates a stuccoed brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof: wood, Tuscan columns; and turned balusters. The primary entrance is comprised of a single-leaf door with a storm door. There is a two-story, projecting, canted bay surmounted by a closed gable with flared eaves on the east end of the façade. The closed gable features a 1/1, wood, double-hung sash window with a rounded arch upper sash and brackets under the eaves. The house features 9/1 and 15/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, canted bay surmounted by a closed gable with flared eaves on the east elevation. There is a two-story, projecting, squared bay surmounted by a closed gable with flared eaves on the west elevation. The closed gable features a 1/1, wood, double-hung sash window with a round arch, upper light. The roof is hipped clad in slate shingles with a wide frieze and wide eaves. The house features a central, interior brick chimney with a corbelled cap.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1925. It incorporates a wood frame structural system clad in asbestos siding. The garage features a roll-up door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **433 West 28th Street**
PROPERTY NAME: House, 433 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1911
DHR NUMBER (S): 122-5087-0519
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1911. It incorporates a parged brick foundation and wood frame structural system clad in aluminum siding. The north façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; and replacement, wood posts and balustrade. There are two entrances on the north façade. These entrances are comprised of single-leaf, metal doors. The north façade also features a one-story, projecting, canted bay on the west end. There is a two-story, projecting, canted bay surmounted by a closed gable on the east elevation. There is a single-leaf, metal, paneled door with two lights on the first-story, canted wall on the north elevation of bay. The house features 6/6 and 9/9, metal, double-hung sash windows. There is an asphalt-shingled, hipped roof dormer that features two, 1/1, vinyl, double-hung sash windows on the north façade. The house features a central, interior, parged brick chimney and an interior, brick chimney on the west elevation. There is a one-story, shed-roofed ell appended to the south elevation. The roof is hipped clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **435 West 28th Street**
PROPERTY NAME: House, 435 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-0061 122-0619
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1915. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; turned balusters; and a wide frieze. The primary entrance is comprised of a single-leaf, wood, paneled door with two lights and a storm door surmounted by a boarded, 3-light transom and flanked by boarded sidelights. The first story façade features a tripartite window of multiple-light, wood, double-hung sash, Queen Anne windows surmounted by transom windows. The house features 9/9, wood, double-hung sash windows. There is a one-story, projecting, canted bay on the east end of the second story façade. The canted bay is surmounted by a closed gable that features a 4/1, wood, double-hung sash window and a dentiled raking cornice with modillions. Carved brackets are located at the corners of the closed gabled under the eaves. The roof is hipped clad in asphalt shingles with a dentiled cornice and modillions. There is a closed gable on the west elevation and a hip-roofed dormer on the east elevation. The house features a central, interior brick chimney with a corbelled cap and an interior, brick chimney with a corbelled cap on the east elevation. There is a one-story, shed-roofed ell appended to the south elevation.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **439 West 28th Street**
PROPERTY NAME: House, 439 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0520
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1912. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, shed roof; wood, Tuscan columns resting on brick pedestals; and a wrought iron wood balustrade. The primary entrance is comprised of a single-leaf, wood door with a light and a storm door surmounted by a transom and flanked by sidelights. The house features individual and tripartite, 1/1, wood, double-hung sash windows with storm windows. The windows on the façade are flanked by non-functional shutters. There is an asphalt-shingled, gable-roofed wall dormer that features paired, 1/1, wood, double-hung sash windows on the north facade. There are also gable-roofed wall dormers on the east and west elevations. The house features an interior, brick chimney with a cap on the east elevation. The roof is hipped clad in asphalt shingles. There is an incorporated, one-story porch located on the south elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1970. It incorporates a concrete slab foundation and wood frame structural system clad in aluminum siding. The garage features a roll-up, metal, paneled garage door. The roof is side gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **441 West 28th Street**
PROPERTY NAME: House, 441 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0521
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival-Craftsman style and constructed in 1910. It incorporates a brick foundation and wood frame structural system. The first story of the north façade is clad in vinyl siding and the second story façade and elevations are clad in asbestos siding. The north façade features a one-story, four-bay porch with an asphalt-shingled, hipped roof; replacement, vinyl posts of varying sizes; and a replacement, wood balustrade. The base of the porch is clad with wood lattice. The primary entrance is comprised of a single-leaf, metal door. The north façade also features a one-story, projecting, squared bay on the west end. The house features 6/6, metal and wood, double-hung sash windows. There is a shed-roofed oriel on the second story of the east elevation. The west elevation features a one-story, one-bay porch with Tuscan columns and a gable roof. There is an 8-light and 2-panel door accessing the porch flanked by boarded sidelights. The west elevation also features a hip-roofed dormer with paired, 6/6, wood, double-hung sash

windows. There is a two-story porch on the south elevation. The house features an exterior, brick chimney with a cap on the second story of the north façade. The projecting squared bay obscures the first story of the exterior chimney. There is also an interior chimney on the south elevation. The roof is hipped clad in asphalt shingles with exposed wood rafters.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **506 West 28th Street**
PROPERTY NAME: House, 506 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1966
DHR NUMBER (S): 122-5087-0028
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1966. It incorporates a concrete block foundation clad in brick veneer and wood frame structural system. The first story is clad in brick veneer and the second story is clad in aluminum siding. The south façade features a brick stoop and single-leaf entrance surmounted by a metal awning. The primary entrance is comprised of a single-leaf, wood door with six lights and a wrought iron storm door. The house features 2/2, wood, double-hung sash windows with storm windows. The first story windows feature rowlock brick sills and the second story windows are flanked by non-functional shutters. The roof is side gable clad in asphalt shingles. There is a one-story, shed-roofed, aluminum-clad ell appended to the north elevation.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **510 West 28th Street**
PROPERTY NAME: House, 510 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1966
DHR NUMBER (S): 122-5087-0523
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1966. It incorporates a concrete block foundation clad in brick veneer and wood frame structural system. The first story is clad in brick veneer and the second story is clad in aluminum siding. The south façade features a stoop comprised of brick stairs surmounted by a metal awning. The primary entrance is comprised of a single-leaf, wood door with six lights and a wrought iron storm door. The house features 2/2, wood, double-hung sash windows with storm windows. The first story windows feature rowlock brick sills and the second story windows are flanked by non-functional shutters. The roof is gable clad in asphalt shingles. There is a one-story, shed-roofed, aluminum-clad ell appended to the north elevation.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **511 West 28th Street**
PROPERTY NAME: House, 511 West 28th Street

OTHER NAME (S):
CONSTRUCTION DATE: 1951
DHR NUMBER (S): 122-5087-0095
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1951. It incorporates a parged brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a single-leaf, metal, paneled door sheltered by a shed roof extending from the main roof. The house features individual and paired, 6/6, metal, double-hung sash windows. Non-functional shutters flank the façade windows. The roof is side gable clad in asphalt shingles. The house features a central, interior, parged chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **514 West 28th Street**
PROPERTY NAME: House, 514 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0030 122-0760
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1920. It incorporates a brick foundation and wood frame structural system clad in weatherboard. The south façade features a one-story, two-bay porch with an asphalt-shingled, gable roof; battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The roof is gable clad in asphalt shingles with brackets under the rakes. There is a wood, louvered vent at the roof apex of the façade gable. There is a tapered, interior, brick chimney on the west elevation. There is also an intersecting gable on the west elevation.

- This is a one-story garage designed in the Craftsman style and constructed circa 1930. It incorporates a wood frame structural system clad in weatherboard. The garage features double-leaf, wood doors. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **515 West 28th Street**
PROPERTY NAME: House, 515 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0094
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1919. It incorporates a brick foundation and wood frame structural system. The first story is clad in brick veneer and the second story is clad in vinyl siding. The north façade features a one-story, one-bay porch with a shed roof extending from the main roof. The porch features battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, door with a storm door. The house features 6/6, metal, double-

hung sash windows. There is an asphalt-shingled, shed-roofed dormer that shelters a second-story, enclosed porch. The second story porch is clad in vinyl siding and punctuated by window openings. The roof is side gable clad in asphalt shingles. There is an exterior, brick chimney on the west elevation. The chimney has a parged brick corbelled cap. There are foundation windows and a door opening on the west elevation that have been filled with vinyl siding.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **518 West 28th Street**
PROPERTY NAME: House, 518 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1926
DHR NUMBER (S): 122-5087-0524
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1926. It incorporates a brick foundation and wood frame structural system clad in weatherboard. The second story is clad in wood shingles. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; square, wood columns; and a wood balustrade. The primary entrance is comprised of a single-leaf, wood door with a storm door. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. There is an asphalt-shingled, hip-roofed dormer on the south façade that features paired, 6-light, wood, casement windows and exposed wood rafters under the eaves. The roof is hipped clad in asphalt shingles with exposed rafters under the eaves.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **519 West 28th Street**
PROPERTY NAME: House, 519 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-0093
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1914. It incorporates a brick foundation and wood frame structural system clad in weatherboard. The north façade features a one-story, one-bay porch with a shed roof extending from the main roof. The porch features paired, battered, wood piers resting on brick pedestals; a wood balustrade; and a wide frieze. The primary entrance is comprised of a single-leaf, wood door surmounted by a transom and flanked by a paneled sidelight on the east. The house features 1/1, wood, double-hung sash windows with storm windows. There is an asphalt-shingled, shed-roofed dormer that shelters a second-story, enclosed porch. The second story porch is clad in weatherboard and punctuated by window openings. The roof is side gable clad in asphalt shingles. There is an exterior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **521 West 28th Street**
PROPERTY NAME: House, 521 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-0525
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1914. It incorporates a brick foundation and wood frame structural system clad in weatherboard. The north façade features a one-story, one-bay porch under the main roof. The porch features paired, battered, wood piers resting on brick pedestals; a wood balustrade; and a wide frieze. The primary entrance is comprised of a single-leaf, wood door surmounted by a transom and flanked by a paneled sidelight on the east. The house features 1/1, wood, double-hung sash windows with storm windows. There is an asphalt-shingled, shed-roofed dormer that shelters a second-story, enclosed porch. The second story porch is clad in weatherboard and has been screened. The roof is side gable clad in asphalt shingles. There is an exterior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **522 West 28th Street**
PROPERTY NAME: House, 522 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0031
DESCRIPTION (S):
This is a one-story house designed in the Craftsman style and constructed in 1919. It incorporates a parged brick foundation and wood frame structural system clad in wood shingles. The south façade features a one-story, one-bay porch incorporated under the main roof. The porch features wood-shingled piers. The primary entrance is centrally located and has been boarded with plywood. The window openings have also been boarded with plywood. The roof is cross-gable clad in asphalt shingles with wide eaves. There is a wood, louvered vent at the roof apex of the façade gable.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **523 West 28th Street**
PROPERTY NAME: House, 523 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-0092
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1914. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, gable roof; battered, wood piers on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door

surmounted by a boarded transom. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The windows on the first story façade have metal bars applied over them. The roof is hipped clad in asphalt shingles.

- This is a garage designed in the Modern Movement style and constructed circa 1940. It incorporates a wood frame structural system clad in corrugated metal with a shed roof.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **525 West 28th Street**
PROPERTY NAME: Duplex, 525 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0091
DESCRIPTION (S):
This is a two-story duplex designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system. The façade is clad in vinyl siding and the side elevations are clad in Stone-tex asphalt siding. The north façade features a two-story, one-bay porch incorporated under the main roof. The porch features wide, wood piers and vinyl-clad balustrades. The second story porch has been screened. The primary entrance is comprised of a single-leaf, metal paneled door with a fan-shaped light. There is a single-leaf door accessing the second story porch. The duplex features individual and paired, 1/1, wood double-hung sash windows with storm windows. The windows on the first story façade are flanked by non-functional shutters. The roof is flat clad in metal. The roof features wide eaves with elongated brackets.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **526 West 28th Street**
PROPERTY NAME: Apartment Building, 526 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1969
DHR NUMBER (S): 122-5087-0032
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1969. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in brick veneer. The building is oriented to the north. The building features 4/4 and 6/6, metal, double-hung sash windows with rowlock brick sills. The roof is gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **529 West 28th Street**
PROPERTY NAME: House, 529 West 28th Street
OTHER NAME (S):

CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0088 122-0621
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1920. It incorporates a parged brick foundation and wood frame structural system clad in stucco. The north façade features a one-story, three-bay porch incorporated under the main roof. The porch is comprised of battered, stuccoed piers resting on brick pedestals and a stuccoed balustrade. The primary is entrance is centrally located and is comprised of a single-leaf door with a wrought-iron storm door. The house features individual and paired, 1/1, metal, double-hung sash windows. There is a projecting, parallel, gable-roofed block. This projecting block features a single-leaf, metal, paneled door with a fan-shaped light and a wrought iron storm door. There is a projecting, squared bay surmounted by a gable roof on the west elevation. The roof is hipped clad in asphalt shingles with wide eaves. There is an exterior, brick chimney that has been parged above the roof on the east elevation. There is also a central, interior, parged brick chimney.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1980. It incorporates a wood frame structural system clad in vertical board and a shed roof.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **534 West 28th Street**
PROPERTY NAME: House, 534 West 28th Street
OTHER NAME (S): Apartment Building, 534 West 28th Street
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-0034
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1905. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, door with a storm door surmounted by a boarded transom and flanked by wood paneled sidelights. There is a two-story, projecting, canted bay surmounted by a closed gable on the west end of the façade. The closed gable features a louvered vent. The house features 1/1, wood, double-hung sash windows with storm windows. The windows on the second story façade and west elevation are surmounted by awnings. The roof is hipped-cross-gable clad in asphalt shingles. There is a two-story, canted bay surmounted by a closed gable on the west elevation. The house features an interior, parged brick chimney with a corbelled cap and a chimney pot on the west elevation. There is a one-story porch appended to the north elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1945. It incorporates a wood frame structural system clad in corrugated metal siding. The roof is gable. The garage features a one-story, shed-roofed addition. The addition features a concrete block foundation and is clad in asbestos siding. The addition features 2/2, metal, double-hung sash windows.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **535 West 28th Street**
PROPERTY NAME: House, 535 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1995
DHR NUMBER (S): 122-5087-0087
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1995. It incorporates a concrete block foundation clad in brick veneer and wood frame structural system clad in vinyl siding. The north façade features a two-story, wraparound porch with an asphalt-shingled, hipped roof; wood, square columns and; a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door. The house features individual and paired, 6/6, metal, double-hung sash windows. Non-functional shutters flank the façade windows. The façade gable is clad in faux-fishscale cut vinyl siding and features an octagonal-shaped, louvered, vent. The roof is gable clad in asphalt shingles.

- This is a one-story shed designed in the Modern Movement style and constructed in 1995. It incorporates wood frame structural system clad in vinyl siding. The shed features a single-leaf, metal, paneled door. The roof is gable clad in asphalt shingles.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **600 West 28th Street**
PROPERTY NAME: Apartment Building, 600 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-0035
DESCRIPTION (S):
This is a two-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1905. It incorporates a 6-course, American bond brick foundation and structural system. The south façade features a two-story, two-bay portico with an asphalt-shingled, hipped roof; and brick piers. This was the former two-story, three-bay porch that is missing a pier and does not support the current porches. The portico shelters two, one-story, one-bay porches with balconies that flank the central entrance. The porches features plain, wood balustrades and posts. The primary entrance is centrally located and is comprised of a single-leaf, metal, paneled door. There are single-leaf, metal, paneled doors accessing each of the porches and balconies. The building features 1/1, metal, double-hung sash windows with 2-course, rowlock brick sills surmounted by 2-course, brick segmental arches. The roof is flat with a stepped parapet on the east and west elevations. The parapet is coped in a rowlock brick course. There is a two-story, two-bay porch appended to the north elevation. The porch features plain, wood posts and balustrades.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1940. It incorporates a wood frame structural system clad in aluminum siding. The east façade features a boarded door. The roof is gable clad in standing-seam metal.
- This is a one-story shed designed in the Modern Movement style and constructed circa 1940. It incorporates a brick structural system and a side gable roof.

CONTRIBUTING (3 - buildings)

PROPERTY ADDRESS: **601 West 28th Street**
PROPERTY NAME: Duplex, 601 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1941
DHR NUMBER (S): 122-5087-0526
DESCRIPTION (S):
This is a one-story duplex designed in the Modern Movement style and constructed in 1941. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features two entrances located on each end. The entrances are comprised of single-leaf doors with storm doors surmounted by metal awnings that are accessed by brick stairs with wrought iron balustrades. The entrances are surmounted by gable roofs connected by a shed roof surmounting the façade windows. The duplex features individual and paired, 1/1, metal, double-hung sash windows. The roof is gable clad in asphalt shingles. The duplex features an interior, brick chimney with a cap on the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **606 West 28th Street**
PROPERTY NAME: House, 606 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1902
DHR NUMBER (S): 122-5087-0037
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1902. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The original weatherboard siding is visible on the east elevation. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a light surmounted by a transom. The house features 1/1, metal, double-hung sash windows. There is a closed gable on the façade that features a 1/1, metal, double-hung sash window. The roof is gable clad in asphalt shingles with a wide frieze. The house features two, interior, brick chimneys on the east elevation. The south chimney features a corbelled cap. There is one-story ell appended to the north elevation. The ell features an exterior, brick chimney on the northwest corner and a porch with wood, turned posts on the northeast corner.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **607 West 28th Street**
PROPERTY NAME: House, 607 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 2000
DHR NUMBER (S): 122-5087-0090
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 2000. It incorporates a concrete block foundation clad in brick veneer and wood frame structural system clad in vinyl siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof. The porch entrance is surmounted by a gable roof. The porch is comprised of plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door flanked b 3-light and paneled sidelights. The house features 6/6, metal, double-hung sash windows. There is a two-story, projecting, squared bay on the west end of the north façade. The squared bay is surmounted by a gable roof with cornice returns. The roof is gable clad in asphalt shingles with cornice returns.

- This is a one-story shed designed in the Modern Movement style and constructed circa 2000. It incorporates wood frame structural system clad in vinyl siding. The shed features a single-leaf, metal, paneled door. The roof is gable clad in asphalt shingles.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **608 West 28th Street**
PROPERTY NAME: House, 608 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1923
DHR NUMBER (S): 122-5087-0038 122-0759
DESCRIPTION (S):
This is a one-story house designed in the Bungalow style and constructed in 1923. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, enclosed porch with a shed roof extending from the main roof. The porch is clad in vinyl siding and 6-light, wood, casement windows fill the porch openings above the vinyl-clad balustrade. The primary entrance is centrally located and is comprised of a single-leaf, wood door with a light and a storm door flanked by fixed, wood windows. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a gable-roofed dormer on the south façade that features a tripartite window of 6-light, wood casement windows. There are one-story, shed-roofed, projecting, squared bays on the east and west elevations. The roof is side gable clad in asphalt shingles with exposed outriggers on the east and west elevations.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **610 West 28th Street**
PROPERTY NAME: House, 610 West 28th Street

OTHER NAME (S):
CONSTRUCTION DATE: 1926
DHR NUMBER (S): 122-5087-0039
DESCRIPTION (S):
This is a two-story house designed in the Dutch Colonial Revival style and constructed in 1926. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The south façade features a one-story, projecting, squared, gable-roofed entrance pavilion. The pavilion features a single-leaf door with a storm door surmounted by a metal awning and a broken pediment. The projecting entrance pavilion is flanked by wood decks with plain, wood balustrades. The house features individual and paired, 6/6, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows. There are wood, half-circle windows on the east and west elevations at the roof apexes. There is an oversized, shed-roofed dormer on the south façade. There is a single-leaf door surmounted by a metal awning on the west elevation. The roof is side-gambrel clad in slate shingles. There is a two-story block appended to the east elevation, which is shorter than the main building. The block features a shed-roofed dormer and a side-gambrel roof clad in slate shingles. The house features an exterior, brick chimney on the east elevation between the main house and the block. Metal, louvered quarter-circle vents flank the chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **611 West 28th Street**
PROPERTY NAME: House, 611 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1926
DHR NUMBER (S): 122-5087-0089
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1926. It incorporates a parged brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, one-bay porch with an asphalt-shingled, hipped roof; paired, wood, Tuscan columns; a vinyl-clad balustrade; and a metal awning. There is a vinyl-clad balustrade located on the east end of the porch roof. The primary entrance is comprised of a single-leaf door with a storm door. The house features individual and paired, 1/1, metal, double-hung sash windows. The roof is side gable clad in composite tiles. The house features an interior, brick chimney on the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **612 West 28th Street**
PROPERTY NAME: House, 612 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1923
DHR NUMBER (S): 122-5087-0040
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1923. It incorporates a brick

foundation and wood frame structural system clad in aluminum siding. The south façade features a one-story, three-bay porch with a shed roof extending from the main roof. The porch is comprised of clustered, wood piers resting on aluminum-clad pedestals and; an aluminum-clad balustrade. The primary entrance is comprised of a single-leaf door with a storm door flanked by louvered shutters. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows. There are oversized, shed-roofed dormers on the south façade and north elevation. The dormer on the south façade features a 4-part window of 1/1, wood, double-hung sash windows with storm windows flanked by non-functional shutters. There is a one-story, squared oriel on the east elevation that features a tripartite window. The roof is side gable clad in asphalt shingles with brackets under the rakes. The house features an exterior, brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **615 West 28th Street**
PROPERTY NAME: House, 615 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0527
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1920. It incorporates a rusticated concrete block foundation and wood frame structural system clad in aluminum siding. The north façade features a one-story, enclosed porch with an asphalt-shingled, gable roof. The porch is clad in plywood and features battered, wood piers resting on paneled, wood pedestals; and a wood shingle-clad balustrade. The porch is accessed by a single-leaf, wood, screen door. The house features 6/2, wood, double-hung sash windows. There is an asphalt-shingled, gable-roofed dormer that features paired, 6-light, wood, casement windows on the north façade. The roof is hipped clad in asphalt shingles. There is a one-story, shed-roofed ell appended to the south elevation.

- This is a one-story garage designed in the Craftsman style and constructed circa 1920. It incorporates a wood frame structural system clad in weatherboard. The garage features a double-leaf, vertical board door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **617 West 28th Street**
PROPERTY NAME: Apartment Building, 617 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1987
DHR NUMBER (S): 122-5087-0528
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1987. It incorporates a concrete block foundation clad in brick veneer and wood frame structural system. The north façade is clad in brick veneer and the side elevations are clad in aluminum siding. The north façade features a

one-story, one-bay porch with an asphalt-shingled, gable roof; wood, turned posts; and plain, wood balustrade. The gable is clad in aluminum siding. There are three entrances on the north façade. Each entrance is comprised of a single-leaf, metal, paneled door. The building features paired, 1/1, metal, double-hung sash windows with rowlock brick sills. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **618 West 28th Street**
PROPERTY NAME: House, 618 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1913
DHR NUMBER (S): 122-5087-0041
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1913. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; squared, wood posts and; a vinyl-clad balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a hip-roofed dormer on the south façade that features paired, double-hung sash windows and exposed, wood rafters under the eaves. The roof is hipped clad in asphalt shingles with exposed, wood, rafters under the eaves.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **621 West 28th Street**
PROPERTY NAME: Duplex, 621 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-0086
DESCRIPTION (S):
This is a two-story duplex designed in the Late 19th and Early 20th Century American Movement style and constructed in 1915. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The north façade features a two-story, two-bay porch with an asphalt-shingled, hipped roof with exposed rafters. The first story porch features wood piers resting on brick pedestals and a plain, wood balustrade. The second story porch has been enclosed with screens and features square, wood columns and a plain, wood balustrade. There are two entrances on the first story of the north facade. The entrances are comprised of single-leaf, metal paneled doors. There is also a single-leaf, wood door with multiple lights accessing the second story porch. The duplex features 1/1, wood double-hung sash windows with storm windows. There is a louvered, wood vent at the roof apex of the north façade. The roof is gable clad in asphalt shingles. The duplex features an interior, parged brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **623 West 28th Street**

PROPERTY NAME: House, 623 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-0069
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1915. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, door with eighteen lights surmounted by a 5-light transom and flanked by wood-paneled sidelights. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The windows on the first story façade are flanked by non-functional shutters. There is a louvered, wood vent at the roof apex of the north façade. The roof is Jerkinhead-gable clad in asphalt shingles. The house features an interior, parged brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **624 West 28th Street**
PROPERTY NAME: House, 624 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0042
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1910. It incorporates a brick foundation and wood frame structural system. The first story is clad in aluminum siding and the second story is clad in wood shingles. The south façade features a one-story, one-bay porch incorporated under the main roof. The porch features a squared, wood post and; a wrought iron balustrade. The primary entrance is comprised of a single-leaf door with a storm door. The house features individual and paired, 9/1, wood, double-hung sash windows with storm windows. There is a hip-roofed dormer on the south façade that features a 9-light, wood, casement window and exposed, wood rafters under the eaves. There is a Jerkinhead-gable wall dormer on the east elevation with exposed rafters under the eaves. The roof is hipped clad in asphalt shingles with exposed, wood rafters under the eaves. The house features an interior, brick chimney on the west elevation.

- This is a one-story shed designed in the Modern Movement style and constructed in 1920. It incorporates a wood frame structural system clad in wood. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **626 West 28th Street**
PROPERTY NAME: House, 626 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1913
DHR NUMBER (S): 122-5087-0043
DESCRIPTION (S):

This is a one-story Bungalow constructed in 1913. It incorporates a brick foundation and a wood frame structural system clad in brick veneer. The façade gable is clad in aluminum siding. The south façade features the primary entrance. The entrance is comprised of a single-leaf, metal door with a storm door that is accessed by brick stairs with a wrought iron balustrade. There is a rowlock brick course surmounting the primary entrance. The façade features metal, sliding windows with rowlock brick sills. The windows on the façade are flanked by non-functional shutters and are surmounted by rowlock brick course lintels. The side elevation windows are 1/1, metal, double-hung sash with rowlock brick sills. There is a 4-light, wood, casement window in the façade gable. The roof is gable clad in asphalt shingles with wide eaves. The house features an interior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **627 West 28th Street**
PROPERTY NAME: Apartment Building, 627 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1967
DHR NUMBER (S): 122-5087-0068
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1967. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in brick veneer. The building is oriented to the west. The west façade features an entrance surmounted by a shed-roofed overhang. The windows on the north elevation are metal, sliding windows with rowlock brick sills. The windows first and second stories of the north elevation are surrounded by banded Roman bricks in a stack bond. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **629 West 28th Street**
PROPERTY NAME: Apartment Building, 629 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1966
DHR NUMBER (S): 122-5087-0067
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1966. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in brick veneer. The building is oriented to the east. The east façade features an entrance surmounted by a shed-roofed overhang. The windows on the north elevation are metal, sliding windows with rowlock brick sills. The windows on the first and second stories of the north elevation are surrounded by stack bond Roman bricks. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **633 West 28th Street**

PROPERTY NAME: House, 633 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0066
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1920. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; modillions under the eaves; paneled, wood posts; and turned balusters. The east end of the porch has been enclosed with screens. The primary entrance is comprised of a single-leaf, wood, paneled door with a light and a storm door surmounted by a transom and flanked by sidelights. The east end of the north façade features a two-story, projecting canted bay. The house features 1/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, canted bay on the south end of the east elevation. There is a single-leaf, wood, paneled door with a storm door surmounted by a transom located on the first story, canted wall of the bay. The roof is hipped clad in asphalt shingles with wide eaves and modillions. There are hip-roofed dormers on the east and west elevations. The dormers features paired, 1/1, double-hung sash windows and modillions. There is also a hip-roofed dormer on the north façade that features a tripartite window of 1/1, double-hung sash windows, and modillions.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a wood frame structural system clad in vinyl siding and an asphalt-shingled, gable roof.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **635 West 28th Street**
PROPERTY NAME: House, 635 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-0065
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The north façade features an enclosed, one-story porch incorporated under the main roof and clad in wood shingles. The porch features wood, Tuscan, columns resting on brick pedestals and is punctuated by 1/1, metal, double-hung sash windows. The primary entrance is comprised of a single-leaf door with wrought iron storm door. The house features 1/1, metal, double-hung sash windows with storm windows. There is an oversized, gable-roofed dormer on the north façade. There is an octagonal-shaped, louvered vent in the gable apex of the dormer. The roof is side gable clad in asphalt shingles with brackets under the rakes. The house features an interior, brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **637 West 28th Street**

PROPERTY NAME: Apartment Building, 637 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0064 122-0758
DESCRIPTION (S):
This is a two-story apartment building designed in the Late 19th and 20th Century Revival style and constructed in 1920. It incorporates a brick foundation and a brick structural system clad in stucco. The primary entrance is centrally located on the west elevation and is comprised of a single-leaf door with a storm door that features a Classical door surround. The door surround is comprised of pilasters and a broken, Georgian pediment. The building features individual, paired, and tripartite, 4/1 and 5/1, wood, double-hung sash windows with wood sills. The west elevation features two, two-story, projecting, squared blocks. There is a single-leaf, metal, paneled door with a fan-shaped light and storm door surmounted by a wood cornice on the north facade. The door is setback back from the façade on the east end. The roof is flat with a stepped parapet coped in composition tile. The central bay on the west elevation features a scrolled parapet with a finial.

- This is a one-story garage designed in the Late 19th and 20th Century Revival style and constructed circa 1920. It incorporates a stuccoed, brick structural system. The garage features a roll-up, metal garage door. The roof is flat with a parapet.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **703 West 28th Street**
PROPERTY NAME: House, 703 West 28th Street
OTHER NAME (S): Apartment Building, 637 West 28th Street
CONSTRUCTION DATE: 1923
DHR NUMBER (S): 122-5087-0063
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1923. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a two-story, two-bay porch with an asphalt-shingled, hipped roof and exposed, wood rafters under the eaves. The first story porch features wood piers resting on brick pedestals; and a plain, wood balustrade. The second story porch features plain, wood piers and a wood balustrade. The primary entrance is comprised of a single-leaf, metal door with a storm door flanked by boarded sidelights. There is a single-leaf, metal door with a storm door flanked by multiple-light sidelights accessing the second story porch. The house features individual and paired, 1/1, metal, double-hung sash windows. There is a two-story, projecting, squared block on the south end of the east elevation. The block features an asphalt-shingled, hipped roof with exposed, wood rafters under the eaves; and an entrance accessed by stairs with a wood balustrade. There are hip-roofed dormers on the north façade and the east elevation that feature paired, 6/6, wood, double-hung sash windows and exposed, wood rafters under the eaves. The roof is hipped clad in asphalt shingles with exposed, wood rafters under the eaves. The house features an exterior, brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **705 West 28th Street**
PROPERTY NAME: House, 705 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0062
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, shed roof; squared, wood columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with wrought iron storm door surmounted by a transom. The house features 6/1, wood, double-hung sash windows with storm windows. There is a gable-roofed dormer on the west elevation that is clad in asbestos shingles. The roof is gable clad in asphalt shingles. The façade gable is clad in asbestos shingles. The house features a central, interior chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **706 West 28th Street**
PROPERTY NAME: House, 706 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1952
DHR NUMBER (S): 122-5087-0046
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1952. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The south façade features a one-story, one-bay porch with an asphalt-shingled, gable roof; wood, Tuscan columns; and turned balusters. The primary entrance is comprised of a single-leaf, metal, paneled door with four lights and a storm door. The house features paired and tripartite, 6/6, metal, double-hung sash windows flanked by non-functional shutters. There is an octagonal, louvered vent at the roof apex on the façade. There is an intersecting, gable-roofed block on the west elevation. The gable-roofed block features a single-leaf door with a storm door. The roof is gable clad in asphalt shingles. The house features a central, interior, brick chimney with a corbelled cap.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1952. It incorporates a wood frame structural system clad in vinyl siding and a metal, roll-up, garage door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **707 West 28th Street**
PROPERTY NAME: House, 707 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1989

DHR NUMBER (S): 122-5087-0529
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1989. It is designed to resemble a Queen Anne style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The primary entrance is located on the north façade. The entrance is comprised of a single-leaf, metal, paneled door with a storm door surmounted by a vinyl, sunburst-motif pediment. The entrance is accessed by brick stairs with a wrought iron balustrade. There is a projecting, canted bay surmounted by an asphalt-shingled, hipped roof on the east end of the north façade. The house features individual and paired, 6/6, metal, double-hung sash windows. The second story façade windows are flanked by non-functional shutters. There is an octagonal-shaped, metal window on the second story of the east elevation. The roof is gable clad in asphalt shingles. There is an octagonal-shaped, louvered vent in the façade gable. There is an additional entrance on the east elevation. The entrance is comprised of a single-leaf door with a storm door accessed by a wood stair.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **720 West 28th Street**
PROPERTY NAME: House, 720 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-0047
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1922. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; boxed cornice; battered, wood piers; turned balusters; and a metal awning. The primary entrance is comprised of a single-leaf door with a storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows. There is a hip-roofed dormer on the south façade that features paired, double-hung sash windows. The roof is side gable clad in asphalt shingles with cornice returns on the east and west elevations. The house features an exterior, brick chimney with a corbelled cap on the east elevation. There is a one-story, low-pitch gable-roofed ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **724 West 28th Street**
PROPERTY NAME: House, 724 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0048
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1918. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The south façade features a one-story,

three-bay porch with an asphalt-shingled, hipped roof; a wide frieze; wrought iron posts and balustrade; and a metal awning. The primary entrance is comprised of a single-leaf door. The house features individual and paired, 1/1, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles with cornice returns on facade. The house features an interior, brick chimney on the east elevation. There is a one-story ell appended to the north elevation.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1980. It incorporates a wood frame structural system clad in wood siding. The shed features a single-leaf door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **725 West 28th Street**
PROPERTY NAME: House, 725 West 28th Street
OTHER NAME (S): Duplex, 725 West 28th Street
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-0060
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1907. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; a boxed cornice; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal door with an oval-shaped light and storm door surmounted by a multiple-light transom and flanked by 2-light sidelights. The house features 2/2, wood, double-hung sash and Queen Anne windows. There is an intersecting, closed gable on the east elevation. The roof is gable clad in asphalt shingles with a wide frieze; a boxed cornice; a raking cornice; and cornice returns on the façade. The house features an interior, parged brick chimney with a corbelled cap on the west elevation. There is a one-story, incorporated porch on the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **729 West 28th Street**
PROPERTY NAME: Duplex, 729 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-0059
DESCRIPTION (S):
This is a two-story duplex designed in the Craftsman style and constructed in 1921. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north facade features a two-story, three-bay porch with a central entrance sheltered by a shed roof extending from the main roof. The porch features vinyl-clad piers resting on brick pedestals. The first story porch has a plain, wood balustrade and the second story porch has a vinyl-clad balustrade. There are two entrances on the façade that are comprised of single-leaf, metal, 6-panel doors with storm doors. There is a single-leaf door accessing the second story porch.

The duplex features individual and paired 1/1, metal, double-hung sash windows. There is a one-story, shed-roofed, projecting, squared bay on the east elevation. There is a steeply pitched, false gable roof with brackets under the rakes appended to the east and west elevations. The roof is side gable clad in asphalt shingles. The duplex features an exterior, brick chimney on the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **732 West 28th Street**
PROPERTY NAME: House, 732 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1997
DHR NUMBER (S): 122-5087-0049
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1997. It is designed to resemble a Queen Anne-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door flanked by a sidelight on the west. The house features 6/6, metal, double-hung sash windows. The roof is gable clad in asphalt shingles. There is a closed gable on the facade that is clad in fishscale-cut, vinyl siding. There is a one-story garage appended to the east elevation. The garage features a roll-up, metal door and; an asphalt-shingled, gable roof.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **733 West 28th Street**
PROPERTY NAME: House, 733 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1940
DHR NUMBER (S): 122-5087-0058
DESCRIPTION (S):
This is a one-story house designed in the Bungalow style and constructed in 1940. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, gable roof; battered, wood piers; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with wrought iron storm door. The house features 6/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles. The house features an interior, brick chimney on the south elevation.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1990. It incorporates a wood frame structural system clad in wood siding. The roof is gable clad in asphalt shingles. The shed features a single-leaf, metal, paneled door.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **735 West 28th Street**
PROPERTY NAME: House, 735 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1937
DHR NUMBER (S): 122-5087-0057
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Colonial Revival style and constructed in 1937. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch partially-incorporated under the main roof. The porch features wrought iron posts and metal awnings. The primary entrance is comprised of a single-leaf, metal, paneled door with a light. The house features 1/1, metal, double-hung sash windows surmounted by metal awnings. There is an intersecting, gable-roofed block on the west end of the façade. The roof is side gable clad in asphalt shingles. The house features an interior, brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **736 West 28th Street**
PROPERTY NAME: House, 736 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1941
DHR NUMBER (S): 122-5087-0050
DESCRIPTION (S):
This is a one-story house designed in the Bungalow style and constructed in 1941. It incorporates a parged brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with a gable roof. The porch features battered, wood piers; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door. The house features 1/1, metal, double-hung sash windows. Non-functional shutters flank the façade windows. The roof is gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **737 West 28th Street**
PROPERTY NAME: House, 737 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0056
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1912. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade is clad in composition shingles. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; a boxed cornice; a wide frieze; wood, Tuscan columns; and turned balusters. The porch exhibits a central entrance that is surmounted by a projecting, pediment supported by wood, Tuscan columns. The primary entrance is comprised of a single-leaf, door with a wrought iron storm door surmounted by a transom and

flanked by sidelights. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows flanked by non-functional shutters. There is a closed gable on the façade that features a tripartite window of a 1/1, double-hung sash window flanked by fixed windows. The house features an interior, brick chimney with a corbelled cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **740 West 28th Street**
PROPERTY NAME: House, 740 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1925
DHR NUMBER (S): 122-5087-0051
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Bungalow style and constructed in 1925. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, one-bay porch with a shed roof extending from the main roof. The porch features battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with six lights and a wrought iron storm door. The house features individual and paired, 6/6, metal, double-hung sash windows flanked by non-functional shutters. There is a gable-roofed dormer on the façade that features paired, 6/6, wood, double-hung sash windows. The roof is side gable clad in asphalt shingles.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1940. It incorporates a wood frame structural system clad in wood siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **741 West 28th Street**
PROPERTY NAME: House, 741 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0055
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1919. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a multiple-light transom. The house features individual and paired, 1/1, metal, double-hung sash windows. There is a shallow shed-roofed dormer on the façade that features a tripartite window. There is a shed-roofed dormer on the south elevation. The roof is side gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **742 West 28th Street**
PROPERTY NAME: House, 742 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1925
DHR NUMBER (S): 122-5087-0052
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1925. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a two-story, two-bay porch surmounted by a hipped roof. The first story porch features aluminum-clad posts and balustrade and; a false, asphalt-shingled hipped roof. The second-story porch is enclosed and features a 5-part window of 6/6, metal, double-hung sash windows. There is a gable-roofed dormer on the hip-roofed porch that features a double-hung sash window and exposed, wood rafters under the eaves. The primary entrance is comprised of a single-leaf, wood, paneled door with lights and a wrought iron storm door surmounted by a transom and flanked by sidelights with panels. The house features 6/6, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles. The house features an interior, parged brick chimney on the west elevation. There is a one-story ell appended to the north elevation.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1970. It incorporates a wood frame structural system clad in wood siding. The shed features a single-leaf, metal, paneled door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **743 West 28th Street**
PROPERTY NAME: House, 743 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0054
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1919. It incorporates a brick foundation and a wood frame structural system clad in composition shingles. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with lights and a wrought iron storm door surmounted by a boarded transom. The house features individual and paired, 6/6, wood, double-hung sash windows with storm windows. There is a shallow shed-roofed dormer on the façade that features a tripartite window surmounted by a metal awning and; exposed, wood rafters under the eaves. There is a shed-roofed dormer on the south elevation. The roof is side gable clad in asphalt shingles. The house features an interior, brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **744 West 28th Street**
PROPERTY NAME: House, 744 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1925
DHR NUMBER (S): 122-5087-0053
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1925. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, two-bay porch incorporated under the main roof. The porch features brick piers; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door flanked by sidelights. The house features individual and tripartite, 6/1, metal, double-hung sash windows. There is a gable-roofed dormer on the facade that features paired, louvered vents and a composition tile roof. The roof is hipped clad in composite tiles with wide eaves. The house features an exterior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **809 West 28th Street**
PROPERTY NAME: House, 809 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0530
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, shed roof with a false gable applied to the east and west elevations. The porch is comprised of square, wood columns and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a wrought iron storm door. The house features individual and paired, 1/1, wood double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles with wide eaves. There is a gable-roofed dormer on the north façade that features a five-light, wood window. There is an exterior, brick chimney on the west elevation. There is an additional single-leaf door on the first story of the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **811 West 28th Street**
PROPERTY NAME: House, 811 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0531
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1919. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, one-

bay porch with an asphalt-shingled gable roof and a central entrance. The porch is comprised of battered, wood piers; a plain, wood balustrade; and features exposed wood rafters under the eaves. The primary entrance is comprised of a single-leaf, wood door with a storm door. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is side gable with wide eaves and exposed rafters under the eaves and outriggers on the rakes. There is a shed-roofed wall dormer on the north façade that features exposed rafters under the eaves. There is a one-story porch appended to the east elevation. The porch incorporates a brick pier foundation and a wood frame structural system clad in wood lattice. The porch has a side gable roof clad in asphalt shingles. There is a one-story, gable-roofed ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **815 West 28th Street**
PROPERTY NAME: House, 815 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0532
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1920. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal paneled door with a storm door. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable features a fixed, wood, single-light window. The house features 1/1, metal, double-hung sash windows. The roof is hipped clad in asphalt shingles with wide eaves. The house exhibits a central, interior, parged brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **819 West 28th Street**
PROPERTY NAME: Duplex, 819 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0533
DESCRIPTION (S):
This is a two-story duplex designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The north façade features a two-story, two-bay porch incorporated under an asphalt-shingled, hipped roof with wide eaves. The first-story porch is comprised of asbestos-clad, battered piers and a closed balustrade. The second story porch is enclosed and clad in vinyl siding with 1/1, double-hung sash windows punctuating the façade. There is a gable-roofed dormer surmounting the east end of the second story, enclosed porch. The gable-roofed dormer features a square, wood, fixed window. The entrances are located on the east end of the façade. The entrances are comprised of single-leaf, metal, paneled doors surmounted by transoms. The house features individual and paired, 1/1, metal double-hung sash windows. There is a diamond-shaped, wood

window on the east elevation. The roof is gable clad in asphalt shingles. There is an intersecting gable on the east elevation. The west elevation features a two-story, projecting, canted bay surmounted by a closed gable.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **823 West 28th Street**
PROPERTY NAME: Duplex, 823 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0534
DESCRIPTION (S):
This is a two-story duplex designed in the Late 19th and Early 20th Century American Movement style and constructed in 1919. It incorporates a brick foundation and wood frame structural system. The north façade is clad in vinyl siding and the side elevations are clad in Bricktex siding. The north façade features a two-story, two-bay porch incorporated under an asphalt-shingled, hipped roof with wide eaves. The east end of the first-story porch has been enclosed with screens and a vinyl-clad balustrade. The enclosed portion features a single-leaf, wood, screen door. The first and second story porches have replacement, plain, wood posts and balustrades. The entrances are located on the east end of the façade. The entrances are comprised of single-leaf, metal, paneled doors with fan-shaped lights and storm doors surmounted by transoms. There is a single-leaf, metal door with a storm door accessing the second story porch. There is a gable-roofed dormer surmounting the east end of the second story, enclosed porch. The gable-roofed dormer features a square, wood, louvered vent. The house features 1/1, wood, double-hung sash windows with storm windows. There is a diamond-shaped, wood window on the east elevation. The roof is gable clad in asphalt shingles. There is an intersecting gable on the east elevation. The west elevation features a two-story, projecting, canted bay surmounted by a closed gable.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **827 West 28th Street**
PROPERTY NAME: Duplex, 827 West 28th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0535
DESCRIPTION (S):
This is a two-story duplex designed in the Late 19th and Early 20th Century American Movement style and constructed in 1919. It incorporates a brick foundation and wood frame structural system. The first story is clad in vinyl siding and the second story is clad in aluminum siding. The north façade features a two-story, two-bay porch incorporated under an asphalt-shingled, hipped roof with wide eaves. The porches feature plain, wood posts and balustrades. The entrances are located on the east end of the façade. The entrances are comprised of single-leaf, metal, paneled doors. There is a single-leaf, wood door with a storm door accessing the second story porch. There is a gable-roofed dormer surmounting the east end of the second story, enclosed porch. The gable-roofed dormer features a square, wood, louvered vent. The house features 1/1, wood, double-hung sash

windows with storm windows. There is a diamond-shaped, wood window on the east elevation. The roof is gable clad in asphalt shingles. There is an intersecting gable on the east elevation. The west elevation features a two-story, projecting, canted bay surmounted by a closed gable.
CONTRIBUTING (1 - building)

West 29th Street

PROPERTY ADDRESS: **204 West 29th Street**
PROPERTY NAME: House, 204 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-0537
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, wraparound porch that is incorporated under the main roof on the west end. The east end of the porch projects from side elevation and features an asphalt-shingled gable roof. The porch features battered, wood piers resting on brick pedestals; a wrought iron balustrade; and a metal awning. The west end of the porch has been enclosed with screens and the east end is enclosed with an aluminum-clad balustrade and screens. The primary entrance is comprised of a single-leaf door with a storm door flanked by multiple-light sidelights. The house features 6/1, wood, double-hung sash windows with storm windows. The south façade features a shed-roofed dormer sheltering a second story, enclosed porch. The second story porch is clad in aluminum siding and features plain, wood posts, and tripartite, metal, sliding windows. The roof is side gable with wide eaves. There are louvered vents at the roof apex on the side elevations.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **206 West 29th Street**
PROPERTY NAME: House, 206 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1897
DHR NUMBER (S): 122-5087-0538
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1897. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The south façade features a one-story porch incorporated under a hipped roof that extends from the main roof on the east end. The porch has been enclosed with asbestos siding and 1/1, metal, double-hung sash windows. The porch features a single-leaf, metal, storm door with lights surmounted by a transom and flanked by sidelights. The original spindlefrieze is visible under the eaves. The west end of the south façade features a two-story,

projecting, squared block surmounted by a gable roof. The gable apex features a carved vergeboard with a sunburst motif and pediment and a Palladian window grouping with 1/1, wood, double-hung sash windows with storm windows. Within the gable, there is square-cut and diamond-cut, wood shingle banding. The house features individual and paired, 8/1, wood, double-hung sash and Queen Anne windows with storm windows. The windows on the façade and the second story of the west elevation are surmounted by metal awnings. There is a gable-roofed dormer on the south façade porch roof that features a carved vergeboard similar to the adjacent gable; wood panels; and an 8/1, wood, double-hung sash window with a storm window flanked by rounded-half-arch windows. The roof is hipped-cross-gable clad in rounded-cut slate shingles. The gable roof apex on the east elevation features a carved vergeboard. There is a gable-roofed dormer on the west elevation. The house features an interior, parged brick chimney on the south façade and a central interior, parged brick chimney. Both chimneys have brick banding, recessed panels and corbelled caps.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **210 West 29th Street**
PROPERTY NAME: House, 210 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-0539
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1914. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The south façade features a one-story, two-bay porch incorporated under the main roof. The porch features asbestos-clad piers resting on brick pedestals; and a plain, wood balustrade. The east and west elevations of the porch feature stucco-clad balustrades and 6/6/6, wood, triple-hung sash windows. The east elevation of the porch is surmounted by a metal awning. The house features 9/1, wood, double-hung sash windows with storm windows. The façade windows are flanked by non-functional shutters and the windows on the first story have been boarded. There is an oversized, gable-roofed dormer on the south façade that is surmounted by a closed gable. The closed gable features exposed wood rafters under the eaves and a diamond-shaped, wood window. The roof is side gable clad in asphalt shingles with wide eaves. There is a one-story, shed-roofed bay on the east elevation. The house features an interior, brick chimney with a cap on the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **211 West 29th Street**
PROPERTY NAME: House, 211 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-0540
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1907. It incorporates a parged brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-

story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; a wide frieze; and turned balusters. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a transom. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the north façade. The closed gable is clad in fishscale-cut, wood shingles and features a wood, Queen Anne, double-hung sash window. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is hipped-cross-gable clad in asphalt shingles with a wide frieze. There is a hip-roofed dormer on the north façade that features a wood, Queen Anne, double-hung sash window. There is a two-story, projecting, canted bay on the east elevation. There is an interior, parged brick chimney with a corbelled cap on the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **212 West 29th Street**
PROPERTY NAME: House, 212 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-0541
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1905. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof. The east end of the porch features a projecting gable surmounted by roof cresting. The porch is comprised of plain, wood posts; a dentiled cornice with modillions; and no balustrade. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a transom. There is a one-story, projecting, canted bay surmounted by a closed gable on the second story of the west end of the façade. The closed gable features a wood, Queen Anne, double-hung sash window; carved brackets with pendants under the eaves at the gable ends; and roof cresting. The house features wood, Queen Anne, double-hung sash windows with storm windows. The roof is hipped clad in slate shingles with a wide frieze and roof cresting. There is a hip-roofed dormer on the south façade that features a wood, Queen Anne, casement window and roof cresting. There is a hip-roofed dormer on the east elevation that features paired, wood, double-hung sash windows and roof cresting. There are two, interior, brick chimneys with corbelled caps on the west elevation. There is a one-story ell appended to the north elevation.

- This is a one-story garage designed in the Modern Movement style constructed circa 1940. It incorporates a wood frame structural system clad in vertical board siding. The doors have been removed. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **213 West 29th Street**
PROPERTY NAME: House, 213 West 29th Street
OTHER NAME (S): Duplex, 213 West 29th Street
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-0542
DESCRIPTION (S):

This is a two-story house designed in the Queen Anne style and constructed in 1907. It incorporates a parged brick foundation and a wood frame structural system clad in wood shingles. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; a wide frieze; and a wood-shingled balustrade. There are two entrances on the west end of the façade. The entrances are comprised of single-leaf, wood doors with lights and storm doors. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the north façade. The closed gable is clad in fishscale-cut, wood shingles and features a 1/1, wood, double-hung sash window. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is hipped-cross-gable clad in asphalt shingles with a wide frieze. There is a hip-roofed dormer on the north façade that features a 1/1, wood, double-hung sash window. There is a one-story, projecting, canted bay surmounted by a closed gable on the second story of the east elevation. There is a recessed entrance on the east elevation. There is a gable-roofed dormer on the west elevation that features cornice returns.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **215 West 29th Street**
PROPERTY NAME: House, 215 West 29th Street
OTHER NAME (S): Duplex, 215 West 29th Street
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-0543
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1907. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; a boxed cornice; and turned balusters. There are two entrances on the west end of the façade. The entrances are comprised of single-leaf, wood, paneled doors surmounted by boarded transoms. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the north façade. The house features 1/1, metal, double-hung sash windows with storm windows. The roof is hipped-cross-gable clad in asphalt shingles. There is a hip-roofed dormer on the north façade that features a boarded window. There is a two-story, projecting, canted bay surmounted by a closed gable on the east elevation. There is a gable-roofed dormer on the west elevation. The house features an interior, parged brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **216 West 29th Street**
PROPERTY NAME: House, 216 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1903
DHR NUMBER (S): 122-5087-0544
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1903. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story,

three-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns resting on brick pedestals; a wide frieze; and a balustrade with no balusters. The east end of the porch projects from the house and forms a porte-cochere. The primary entrance is comprised of a single-leaf, wood door with a light and a wrought iron storm door. There is a two-story, projecting, canted bay on the east end of the façade. There is a one-story, projecting, squared block on the second story of the west end of the façade that rests on the porch. The squared block is clad in vinyl siding and is punctuated by tripartite, 1/1, metal, double-hung sash windows. The house features 1/1, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles with a cornice that forms closed gables on the east and west elevations. The roof at the north end is flat. There is an incorporated porch on the northeast corner of the house that has been enclosed with screens. There is a one-story, flat-roofed, concrete block ell appended to the northwest corner of the house.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **217 West 29th Street**
PROPERTY NAME: House, 217 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0545
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; and replacement, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal door with a light. There is a two-story, projecting, squared block surmounted by a raking cornice and gable roof on the east end of the façade. The gable features cornice returns. The house features replacement, 6/6, metal, double-hung sash windows. The roof is hipped-cross-gable clad in asphalt shingles with a cornice and wide frieze. There is a hip-roofed dormer on the north façade. The intersecting gables on the east and west elevation feature cornice returns. The house features a central, interior, brick chimney with a corbelled cap. There is a two-story ell appended to the south elevation. The second story of the ell is slightly cantilevered above the first story.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **218 West 29th Street**
PROPERTY NAME: House, 218 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1904
DHR NUMBER (S): 122-5087-0546
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1904. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; a boxed cornice with modillions; wood, Tuscan columns; and turned balusters. The primary entrance is recessed at the east end of the building and is comprised

of a single-leaf door with a storm door surmounted by a transom. There is a two-story, projecting, squared block surmounted by a closed gable on the west end of the façade. The closed gable is clad in fishscale-cut, wood shingles and features a boxed cornice with modillions; and a Palladian window grouping of a rounded arch, wood window flanked by fixed wood windows. The house features 2/2, wood, double-hung sash windows with storm windows. The roof is hipped-cross-gable clad in asphalt shingles. The roof features a boxed cornice with modillions and a wide frieze. The cornice forms closed gables on the east and west elevations. The house features an interior, brick chimney with a corbelled cap on the north elevation. There is a one-story ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **221 West 29th Street**
PROPERTY NAME: House, 221 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 2004
DHR NUMBER (S): 122-5087-0547
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 2004. It incorporates a concrete block foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, turned posts; and a replacement balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door. There is a two-story, projecting, squared bay surmounted by a gable roof on the east end of the façade. The squared bay features a 4/4, metal, double-hung sash window and cornice returns. There is also a one-story, projecting, canted bay on the first story of the west end of the façade. The house features paired, 6/6, metal, double-hung sash windows. The roof is gable clad in asphalt shingles with cornice returns on the façade. There is a one-story, incorporated porch with wood, turned posts on the southeast corner of the house.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **222 West 29th Street**
PROPERTY NAME: House, 222 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0548
DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1920. It incorporates a brick foundation and a wood frame structural system. The house is clad in vinyl siding below the first story window sills, while above the sills the house is clad in wood shingles. The south façade features a one-story, two-bay porch with a shed roof continuing the main roof. The porch features battered, wood posts and a wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a wrought iron storm door. The house features individual, paired and tripartite, 6/1 and 8/1, wood, double-hung sash windows with storm windows. There is a gable-roofed dormer on the south façade that features exposed, wood rafters under the eaves and brackets on the

rakes; and tripartite, 6/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingled with brackets under the rakes. There is a one-story, projecting, squared bay with a shed roof on the east elevation. There is a wood stair appended to the east elevation that accesses a single-leaf door on the second story. There are two, exterior, brick chimneys with caps on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **226 West 29th Street**
PROPERTY NAME: House, 226 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-0549
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns resting on brick pedestals; wood, turned balusters; a boxed cornice; and a wide frieze. The porch has been screened and features a single-leaf, metal storm door. The primary entrance is a single-leaf, wood door with a storm door surmounted by a diamond-paned transom and flanked by diamond-paned sidelights. There is a two-story, projecting, canted bay on the east end of the façade. The house features wood, Queen Anne, double-hung sash windows with storm windows. There is a hip-roofed dormer on the south façade that features paired, wood, Queen Anne, double-hung sash windows with storm windows. The roof is hipped clad in asphalt-shingles with wide eaves. There are brackets under the eaves at the building corners on the south façade. There is a hip-roofed dormer on the east elevation and a closed gable on the west elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in weatherboard. The garage features double-leaf, wood, paneled doors with six lights. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **227 West 29th Street**
PROPERTY NAME: House, 227 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0550
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; battered, wood piers resting on brick pedestals; wood, turned balusters; a cornice; and a wide frieze. The primary entrance is a single-leaf door with a wrought iron storm door surmounted by a diamond-paned transom and flanked by diamond-paned

sidelights. There is a two-story, projecting, canted bay on the east end of the façade. The house features 1/1, wood, double-hung sash windows with storm windows. There is a hip-roofed dormer on the north façade that features tripartite, 1/1, wood, double-hung sash windows with storm windows and a wide frieze. The roof is hipped-cross-gable clad in asphalt-shingles with wide eaves. There are brackets under the eaves on the north façade. There is a two-story, projecting, canted bay surmounted by a closed gable, and a one-story, projecting, squared bay on the east elevation. There is a closed gable on the west elevation. The house features an interior, brick chimney on the east elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system clad in corrugated metal. The garage features double-leaf, corrugated metal doors. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **229 West 29th Street**
PROPERTY NAME: House, 229 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0551
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1906. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with a low-pitch, shed roof; wood, Tuscan columns; wood, turned balusters; and a wide frieze. The primary entrance is a single-leaf door with a storm door surmounted by a transom. The porch roof features a second story balcony with a plain, wood balustrade. The second story balcony is accessed by a single-leaf, metal, paneled door. There is a two-story, projecting, canted bay on the east end of the façade surmounted by a closed gable. The closed gable features a 1/1, wood, double-hung sash window. The house features 1/1, wood, double-hung sash windows with storm windows. The façade and west elevation windows are flanked by non-functional shutters. There is a hip-roofed dormer on the north façade that features a wood, Queen Anne, double-hung sash window. The roof is hipped-cross-gable clad in slate-shingles with wide eaves. There is a two-story, projecting, canted bay surmounted by a closed gable on the east elevation. There is a closed gable on the west elevation that features a wood, Queen Anne, double-hung sash window flanked by non-functional shutters. The house features two, interior, brick chimneys with corbelled caps on the east elevation, and a central, interior brick chimney on the south end of the house.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in vinyl siding. The roof is Jerkinhead gable clad in asphalt shingles.
- This is a one-story outbuilding designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1930. This building is located to the southwest of the house. It incorporates a brick foundation and a wood frame structural system. The lower portion is clad in vertical board and the upper portion is clad in horizontally hung wood siding. The north façade features a single-leaf,

wood door and 1/1, aluminum, double-hung sash windows. The outbuilding in enclosed with screens. The roof is gable clad in asphalt shingles with wide eaves.

- This is a one-story outbuilding designed in the Modern Movement style constructed circa 1950. This building is located to the southwest of the house and west of the other outbuilding on the property. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a single-leaf, metal, storm door. The building features screens on all the elevations. The roof is gable clad in asphalt shingles.

CONTRIBUTING (4 - buildings)

PROPERTY ADDRESS: **237 West 29th Street**
PROPERTY NAME: House, 237 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1909
DHR NUMBER (S): 122-5087-0552
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1909. It incorporates a brick foundation and wood frame structural system clad in wood shingles. The north façade features a one-story, one-bay porch incorporated under the main roof. The porch features stuccoed columns resting on brick pedestals; a plain, wood balustrade; a wide frieze; and exposed, wood rafters under the eaves. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door. The house features individual, paired and tripartite, 9/1, wood, double-hung sash windows with storm window. There is a shed-roofed dormer on the north façade that features six-light, wood, casement windows; louvered vents; and exposed wood rafters under the eaves. The roof is side gable clad in asphalt shingles with exposed wood rafters under the eaves. The house features an exterior, brick chimney with a concrete cap on the east elevation. There is a one-story, shed-roofed ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **240 West 29th Street**
PROPERTY NAME: House, 240 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1904
DHR NUMBER (S): 122-5087-0553
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1904. It incorporates a rusticated stone foundation and a wood frame structural system clad in wood shingles. The south façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; wood, fluted, Doric columns; a wide frieze; and modillion cornice. The east portion of the porch has been enclosed with glass and is accessed by a single-leaf door with a transom. The primary entrance is comprised of double-leaf, wood, paneled doors with lights and a double-leaf storm door surmounted by a common transom. The house features 1/1, wood, double-hung sash with storm windows. The east end of the south façade features a two-story, projecting, squared bay. The closed

façade gable features a window opening, a wide frieze, and modillions. The roof is hipped-cross-gable clad in asphalt shingles. The east and west elevations feature two-story, projecting, canted bays surmounted by gables. There is a two-story porch with wood, turned posts and balusters appended to the north elevation of the house. The house features an interior brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **241 West 29th Street**
PROPERTY NAME: House, 241 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0554
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system. The first story is clad in common bond brick veneer and the second story is clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; brick piers and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood paneled door with a light surmounted by a 3-light transom and flanked by paneled sidelights. The house features individual and paired, 9/1, wood, double-hung sash windows with storm windows. There are gable-roofed wall dormers on the north façade and the east and west elevations. The wall dormers feature 9-light, wood, casement windows. The window opening on the façade wall dormer has been boarded. The roof is hipped clad is slate shingles with wide eaves. The house features an exterior, brick chimney on the east elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1930. It incorporates a wood frame structural system clad in wood shingles. The garage features a double-leaf, metal garage door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **242 West 29th Street**
PROPERTY NAME: House, 242 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0555
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in weatherboard. Within the east and west gables is wood shingles. The south façade features a one-story porch incorporated under the main roof. The porch is comprised of wood piers resting on brick pedestals; a plain, wood balustrade; and exposed, wood rafters under the eaves. The primary entrance is comprised of a single-leaf, wood door with three lights. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The second-story of the façade features an oversized shed-roofed dormer that incorporates a two-bay porch. The second-story porch is clad in wood

shingles and features clustered, wood piers; a wood balustrade; and exposed wood rafters under the eaves. There is a single-leaf, wood door with lights accessing the second-story porch. The roof is side gable clad in asphalt shingles. The north end of the roof is a low-pitch gable.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **244 West 29th Street**
PROPERTY NAME: House, 244 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1913
DHR NUMBER (S): 122-5087-0556
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1913. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood door with a wrought iron storm door surmounted by a multiple-light transom and flanked by boarded sidelights. The house features individual and tripartite, 1/1, wood, double-hung sash with storm windows. The façade gable features a tripartite, 4/4 and 6/6, wood, double-hung sash window grouping with storm windows and projecting outriggers. The roof is gable clad in asphalt shingles. The house features an exterior, brick chimney with a concrete cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **246 West 29th Street**
PROPERTY NAME: Duplex, 246 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0557
DESCRIPTION (S):
This is a two-story duplex designed in the Colonial Revival style and constructed in 1906. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, four-bay porch with an asphalt-shingled, hipped roof; wide eaves; plain, wood posts; and an asbestos-clad balustrade. There are two entrances on the south façade. Both entrances are comprised of single-leaf, metal, paneled doors with storm doors. The duplex features 1/1, metal, double-hung sash windows. Non-functional shutters flank the windows on the south facade. The roof is gable clad in asphalt shingles. The house features an exterior, brick chimney with a cap on the north elevation. There is a shed-roofed ell appended to the west end of the north elevation and a gable-roofed addition appended to the east end of the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **247 West 29th Street**
PROPERTY NAME: Apartment Building, 247 West 29th Street
OTHER NAME (S):

CONSTRUCTION DATE: 1984
DHR NUMBER (S): 122-5087-0558
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1984. It incorporates a concrete block foundation and a wood frame structural system clad in vinyl siding. The north facade features a centrally located, projecting entrance block surmounted by a shed roof extending from the main roof. The west corner of the block is inset and features a single-leaf, metal, paneled door. The building features paired, metal, sliding windows flanked by non-functional shutters. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **309 West 29th Street**
PROPERTY NAME: House, 309 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1993
DHR NUMBER (S): 122-5087-0559
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1993. It is designed to resemble a Queen Anne-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The north façade features a one-story, one-bay porch with an asphalt-shingled, shed roof; clustered, wood posts resting on wood, paneled pedestals; and a wood balustrade with a diamond-cut motif. The primary entrance is comprised of a single-leaf, metal door with multiple lights. The house features 1/1, metal, double-hung sash windows. There is a two-story, projecting, squared block surmounted by a gable on the west end of the façade. The roof is gable clad in asphalt shingles. The house also features a single-leaf door with a storm door on the west elevation.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **310 West 29th Street**
PROPERTY NAME: House, 310 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1999
DHR NUMBER (S): 122-5087-0560
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1999. It is designed to resemble a Queen Anne-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The south façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; wood, turned posts; and a wood balustrade. The primary entrance is comprised of a single-leaf, metal door with a multiple-light storm door framed by a Classical door surround. The door surround is comprised of pilasters supporting a plain cornice. The house features 6/6, metal, double-hung sash windows. The roof is gable clad in asphalt shingles with returns on the façade and a frieze. The

façade gable is clad in faux-fishscale cut vinyl siding and features gable returns and a half-arch, louvered vent.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **314 West 29th Street**
PROPERTY NAME: House, 314 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1994
DHR NUMBER (S): 122-5087-0561
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1994. It is designed to resemble a Queen Anne-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, shed roof; and plain, wood posts and balustrade. An intersecting gable clad in wood shingles surmounts the porch entrance. The primary entrance is comprised of a single-leaf, metal door with a storm door framed by a Classical door surround. The door is flanked by pilasters and surmounted by a pediment. The house features 6/6, metal, double-hung sash windows. There is a two-story, projecting, squared block surmounted by a gable on the west end of the façade. The roof is gable clad in asphalt shingles. The gables on the facade are clad in wood shingles. The house also features a single-leaf door with a multiple-light storm door accessed by wood stairs on the on the west elevation.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1995. It is incorporates a wood frame structural system clad in vinyl siding. The roof is gable clad in asphalt shingles.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **315 West 29th Street**
PROPERTY NAME: House, 315 West 29th Street
OTHER NAME (S): Duplex, 315 West 29th Street
CONSTRUCTION DATE: 1902
DHR NUMBER (S): 122-5087-0562
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1902. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The north façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; modillion cornice; fluted, wood, columns with Corinthian capitals; engaged columns on the east elevation and west end of the north façade; and turned balusters. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a transom. The house features 1/1 and Queen Anne, wood, double-hung sash windows with storm windows. There is a two-story, projecting canted bay on the east end of the façade surmounted by a closed gable. The closed gable features brackets with pendants, a modillion cornice, and a Palladian window incorporating wood, Queen Anne, double-hung sash windows. The central window has a rounded arch upper light and is flanked by wood, diamond-paned, double-hung sash windows. The rounded arch window features an articulated keystone.

There is a gable-roofed dormer on the north façade that features a closed gable with a wood, diamond-paned, double-hung sash window and modillion cornice. The roof is hipped-cross-gable clad in slate shingles with diamond-patterned bands of slate shingles on the intersecting gable roofs. The house features a wide frieze, a modillion cornice and carved brackets. There is a two-story, projecting, canted bay on the east elevation surmounted by a shed roof with carved brackets and a modillion cornice. The intersecting gable on the east elevation surmounts the shed roof. The gable features a 1/1, wood, double-hung sash window; cornice returns; and vergeboard with spindlework at the roof apex. There is a gable-roofed dormer on the west elevation that features paired, 1/1, wood, double-hung sash windows surmounted by a closed gable. There is a one-story porch appended to the south elevation. This house has been divided into multiple units.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **318 West 29th Street**
PROPERTY NAME: Apartment Building, 318 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1966
DHR NUMBER (S): 122-5087-0563
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1966. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad brick veneer. The south facade features two centrally located entrances surmounted by an asphalt-shingled, shed roof overhang. The entrances are comprised of single-leaf, wood, paneled doors wit two lights. The building features metal, sliding windows with rowlock brick sills flanked by lighter-colored brickwork emulating shutters. Air conditioning units punctuate the façade. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **319 West 29th Street**
PROPERTY NAME: Apartment Building, 319 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1989
DHR NUMBER (S): 122-5087-0564
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1989. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad brick veneer. The second story of the east and west elevations is clad in vinyl siding. The north facade features five, centrally located entrances; three on the first story and two on the second story. The entrances are comprised of single-leaf, metal, paneled doors. The second story entrances are accessed by a wood staircase appended to the façade. The north façade is sheltered by the wide eave of the main roof. The building features 1/1, metal, double-hung sash windows. Air conditioning units punctuate the façade. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **321 West 29th Street/321-323 West 29th Street**
PROPERTY NAME: Apartment Building, 321 West 29th Street
OTHER NAME (S): Manchester Apartments
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0565
DESCRIPTION (S):
This is a two-story apartment building designed in the Colonial Revival style and constructed in 1912. It incorporates a 7-course American bond brick foundation and a 7-course American bond brick structural system. The north façade is clad in common bond brick veneer. The façade features a two-story porch with an asphalt-shingled, hipped roof; wood, paneled piers; and two, centrally located entrances. The first story of the porch is four-bay and features a plain, wood balustrade. The second story of the porch has two bays and features turned balusters. There are two entrances on the façade. Both entrances are comprised of single-leaf door with storm doors surmounted by boarded transoms and two-course header brick arches. There are two, single-leaf doors with storm doors surmounted by boarded transoms and jack arches accessing the second story porch. The building features 1/1, wood, double-hung sash windows with storm windows surmounted by jack arches. The north facade features polychromatic, brick quoins and a corbelled cornice. The roof is flat with a parapet coped in brick. The building features ten brick chimneys with corbelled caps; five are located on the west elevations and five are located on the east elevation. The chimneys are embedded in the elevation walls and break the roof parapet.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **400 West 29th Street**
PROPERTY NAME: House, 400 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0566
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1912. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped, roof; a wide frieze, wood, Tuscan columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door surmounted by a transom. There is a two-story, projecting, canted bay on the east end of the façade surmounted by a closed gable. The closed gable is clad in wood shingles and features a 1/6, wood, double-hung sash window. The house features 1/1, wood, double-hung sash windows with storm windows. There is a gable-roofed dormer on the north façade that is clad in wood shingles and features a 1/1, wood, double-hung sash window surmounted by a closed gable. The roof is hipped-cross-gable clad in asphalt shingles with a wide frieze. There is a two-story, projecting, canted bay on the east elevation surmounted by a closed gable. The house features an interior, parged brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **404 West 29th Street**
PROPERTY NAME: House, 404 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0567
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1912. It incorporates a brick foundation and a wood frame structural system clad in weatherboard siding. The south façade features a one-story, screened porch with an asphalt-shingled, hipped, roof; wood, Tuscan columns; and a metal awning. The primary entrance has been enclosed with screens and features a single-leaf, metal storm door. There is a two-story, projecting, canted bay on the east end of the façade surmounted by a closed gable. The closed gable is clad in fishscale-cut, wood shingles and features a 1/1, wood, double-hung sash window. The house features 1/1, wood, double-hung sash windows with storm windows. There is a gable-roofed dormer on the south façade that is clad in fishscale-cut, wood shingles and features a 1/1, wood, double-hung sash window surmounted by a closed gable. The roof is hipped-cross-gable clad in asphalt shingles with a wide frieze. There is a two-story, projecting, canted bay on the east elevation surmounted by a closed gable. The closed gable is clad in fishscale-cut, wood shingles and features a 1/1, wood, double-hung sash window. There is a gable-roofed dormer on the west elevation that is clad in fishscale-cut, wood shingles and features a 1/1, wood, double-hung sash window surmounted by a closed gable. The house features two, interior, brick chimneys with a corbelled caps on the east elevation. There is also an interior, parged brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **405 West 29th Street**
PROPERTY NAME: House, 405 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1913
DHR NUMBER (S): 122-5087-0568
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1913. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north facade features a two-story, two-bay porch with a shed roof. The first story porch has been screened and features battered, wood piers and turned balusters. The first story porch is accessed by a single-leaf, storm door. The second story porch has been enclosed with metal, sliding windows and features clustered, wood posts and a closed balustrade. The primary entrance to the house is comprised of a single-leaf door surmounted by a transom and flanked by sidelights. The house features 1/1, wood, double-hung sash windows with storm windows. There is a gable-roofed dormer on the north façade that features tripartite, wood, Queen Anne, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles with wide eaves. There is a one-story, projecting, squared bay on the east elevation that is surmounted by a shed roof. The house features and interior, brick chimney on the east elevation.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **408 West 29th Street**
PROPERTY NAME: House, 408 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1911
DHR NUMBER (S): 122-5087-0569
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1911. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and turned balusters. A section of an original wraparound porch has been enclosed with paired and tripartite, 6/6, wood, double-hung sash windows and is clad in asbestos siding at the east end. The primary entrance is comprised of a single-leaf, wood, paneled door with six lights and a wrought iron storm door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. The façade is dominating by a projecting, squared block surmounted by a closed gable. The closed gable features paired, 1/1, wood, double-hung sash windows with storm windows. There is a one-story, projecting, canted bay centrally located on the first story façade. There is a two-story, projecting, squared block on the east elevation that is surmounted by a closed gable. The first story of the block has a projecting, canted bay on the first story with a hipped roof. There is a hip-roofed dormer on the west elevation. There is a one-story ell appended to the north elevation. The roof is hipped-cross-gable clad in asphalt shingles. The house features a central, interior, brick chimney with a corbelled cap and an interior, brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **409 West 29th Street**
PROPERTY NAME: House, 409 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1992
DHR NUMBER (S): 122-5087-0570
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1992. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The north façade features a one-story, one-bay porch with an asphalt-shingled, gable roof and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door. The house features individual and paired, 6/6, metal double-hung sash windows. Non-functional shutters flank the façade windows. The roof is gable clad in asphalt shingles with a louvered vent in the gable apex.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **410-412 West 29th Street**
PROPERTY NAME: Duplex, 410 West 29th Street

OTHER NAME (S): Duplex, 410-412 West 29th Street
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-0072 122-0920
DESCRIPTION (S):
This is a two-story duplex designed in the Colonial Revival style and constructed in 1905. It incorporates a 7-course, American bond brick foundation and 7-course, American bond brick structural system. The south façade is clad in common bond brick veneer. The south facade features a one-story, six-bay porch with an asphalt-shingled, hipped roof; a boxed cornice; a wide frieze; plain, wood posts; engaged, wood columns; and a closed balustrade. There are two centrally located entrances on the south façade that are surmounted by an intersecting, closed gable on the porch roof. The entrances are comprised of single-leaf, wood, paneled doors with storm doors surmounted by boarded transoms. The building features 1/1, wood, double-hung sash windows with diamond-paned upper lights, storm windows and limestone sills. The second story façade windows are surmounted by polychrome brick jack arches and the side elevation windows are surmounted by 2-course, brick segmental arches. The roof is flat with a stepped parapet on the east and west elevations. The parapet is coped in a rowlock brick course. There is a corbelled cornice surmounted by an applied wood, dentiled cornice with a wide frieze, and cornice returns on the south façade. The building features four chimneys with parged, corbelled caps imbedded in the east and west elevation walls.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **413 West 29th Street**
PROPERTY NAME: House, 413 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1992
DHR NUMBER (S): 122-5087-0571
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1992. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The north façade features a one-story, one-bay porch with an asphalt-shingled, gable roof; wood, turned posts; and turned balusters. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door. The house features individual and paired, 6/6, metal double-hung sash windows. Non-functional shutters flank the façade windows. The roof is gable clad in asphalt shingles with a louvered vent in the gable apex.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **415 West 29th Street**
PROPERTY NAME: House, 415 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-0572
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1907. It incorporates a brick

foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped, roof; a wide frieze; wood, Tuscan columns; and wood, turned balusters. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door surmounted by a transom. There is a two-story, projecting, canted bay on the west end of the façade surmounted by a closed gable. The closed gable features a 1/1, wood, double-hung sash window. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles. The house features an interior, brick chimney with a corbelled cap on the west elevation. There is a one-story ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **416 West 29th Street**
PROPERTY NAME: House, 416 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0573
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped, roof; wood, Tuscan columns; wood, turned balusters; and a metal awning. The primary entrance is centrally located and is comprised of a single-leaf, wood, paneled door with lights and a storm door. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles. The intersecting, closed gable on the façade features a 1/1, metal, double-hung sash window. There is a gable-roofed dormer on the façade that features a 1/1, metal, double-hung sash window surmounted by a closed gable. There are gable-roofed dormers on the east and west elevations. The side elevation dormers feature cornice returns and 1/1, double-hung sash windows. The house features an interior, brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **418 West 29th Street**
PROPERTY NAME: House, 418 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0574
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1912. It incorporates a parged brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns resting on parged brick piers; a replacement, wood balustrade; and a boxed cornice with a wide frieze. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light. There is a two-story, projecting, canted bay on the east end of the façade. The house features 6/6, metal, double-hung sash windows. The façade gable is closed and

features two, 1/1, metal, double-hung sash windows. The roof is cross-gable clad in slate shingles. The gable on the west elevation features a 1/1, metal, double-hung sash window. The house features an interior, brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **419 West 29th Street**
PROPERTY NAME: House, 419 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1902
DHR NUMBER (S): 122-5087-0575
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1902. It incorporates a brick foundation and a wood frame structural system clad in weatherboard. There is a common bond brick plinth on the north façade that features a rowlock brick watertable. The north façade features a one-story, projecting, squared block with an asphalt-shingled, gable roof. The block features paired, fixed, vinyl windows with transom windows; a closed gable clad in fishscale-cut, wood siding; and a boxed cornice. The primary entrance is located on the east elevation of this block. The entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, squared bay surmounted by a closed gable on the east end of the façade. The closed gable is clad in fishscale-cut, wood siding and features a fan-shaped, wood window. There is a gable-roofed dormer on the north façade that is clad in wood shingles and features a 1/1, double-hung sash window. The roof is deck on hip clad in asphalt shingles with a bracketed cornice, and wide frieze. There is a one-story, projecting, canted bay on the east elevation. There is a one-story, projecting, hipped-roofed oriel on the west elevation between the first and second stories. The house features an interior, brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **426 West 29th Street**
PROPERTY NAME: House, 426 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 2003
DHR NUMBER (S): 122-5087-0576
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 2003.It is designed to resemble a Queen Anne-style house. It incorporates a concrete block foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, turned posts; and a plain balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door. There is a one-story, projecting, canted bay on the west end of the first story façade. There is a one-story, projecting, squared bay surmounted by a gable with cornice returns on the second story of the east end of the façade. The house features individual and paired, 6/6 and 4/4, metal, double-hung sash windows.

The roof is gable clad in asphalt shingles. The façade gable features a rounded-arch, vinyl, louvered vent and cornice returns. There is a one-story, incorporated porch with wood, turned posts on the north elevation.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **427 West 29th Street**
PROPERTY NAME: House, 427 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1902
DHR NUMBER (S): 122-5087-0577
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1902. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, one-bay porch with an asphalt-shingled, gable roof; paired, wood posts; engaged posts; a wood balustrade; a closed gable; and a bracketed cornice. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light. The house features individual and paired, 1/1, metal, double-hung sash windows. Non-functional shutters flank the windows on the façade. There is a one-story, projecting, squared bay surmounted by a closed gable on the west end of the second story façade. The closed gable features a boarded window opening. There is a gable-roofed dormer on the north façade that features a 6-light, wood, casement window. The roof is deck on hip clad in asphalt shingles with a bracketed cornice, and wide frieze. There is a one-story, hipped-roofed oriel missing its brackets on the west elevation between the first and second stories. The house features an interior, parged brick chimney with a corbelled cap and metal chimney pot on the east elevation. There is a one-story ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **430 West 29th Street**
PROPERTY NAME: House, 430 West 29th Street
OTHER NAME (S): Duplex, 430 West 29th Street
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-0578
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Late 19th and early 20th Century American Movement style and constructed in 1905. The house occupies an L-shaped footprint on the property. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; aluminum-clad piers resting on brick pedestals; and a wrought iron balustrade. There are two entrances on the south façade. The westernmost entrance is comprised of a single-leaf door with a storm door surmounted by a multiple-light transom. The easternmost entrance is situated on the cross-gable block at the east end of the house and is comprised of a single-leaf door with a storm door. There is a two-story, projecting, canted bay on the west end of the façade with a hipped roof. The house features 1/1 and 2/2, metal, double-hung sash windows. There is a one-story, projecting, squared bay with an asphalt-shingled, hipped roof on the second story of the east end of the façade. The roof is

comprised of two, perpendicular-intersecting gables forming a cross gable clad in asphalt shingles. There is a one-story, one-bay, gable-roofed porch appended to the northeast corner of the house. There is a one-story, shed-roofed ell appended to the north elevation. The house features an interior, brick chimney with a corbelled cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **431 West 29th Street**
PROPERTY NAME: House, 431 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1992
DHR NUMBER (S): 122-5087-0579
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1992.It is designed to resemble a Queen Anne-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; and plain, wood posts and balustrade. The primary entrance is centrally located on the façade and is comprised of a single-leaf, metal, paneled door with a storm door. The house features 6/6, metal, double-hung sash windows. Non-functional shutters flank the windows on the façade. The roof is gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **435 West 29th Street**
PROPERTY NAME: House, 435 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-0581
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1905. It incorporates a brick foundation and a wood frame structural system clad in weatherboard. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and a wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light surmounted by a transom. There is a two-story, projecting, squared bay surmounted by a closed gable on the east end of the façade. The closed gable is clad in wood shingles and features a fixed, wood, multiple-light window and a boxed cornice. The house features 1/1, metal, double-hung sash windows. The roof is hipped-cross-gable clad in asphalt shingles with a cornice and wide frieze. There is a two-story, projecting, canted bay surmounted by a closed gable on the east elevation. The house features an interior, brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **511 West 29th Street**
PROPERTY NAME: House, 511 West 29th Street

OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0019
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1912. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns resting on rusticated stone pedestals; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door. The house features individual and paired, 2/2, metal, double-hung sash windows. Non-functional shutters flank the façade windows. There is an intersecting gable on the façade that features a metal, louvered vent. There is an intersecting gable on the west elevation. The roof is hipped clad in asphalt shingles with wide eaves. There is a one-story ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **513 West 29th Street**
PROPERTY NAME: House, 513 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0020
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1912. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, shed roof; and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf door with a storm door. The first story façade features a tripartite window of 1/1, wood, double-hung sash windows with storm windows surmounted by a carved panel with a sunburst motif. The house features 1/1, wood, double-hung sash windows with storm windows. There is a closed, intersecting gable on the east end of the façade that features a wood, louvered vent. The roof is hipped clad in asphalt shingles. There is a closed, intersecting gable on the west elevation. The house features a central, interior, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **515 West 29th Street**
PROPERTY NAME: House, 515 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0018
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system. The first story is clad in vinyl siding and the second story is clad in wood shingles. The north façade features a one-story, two-

bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and turned balusters. The primary entrance is comprised of a single-leaf, metal, paneled door with a wrought iron storm door. The house features individual and paired, 1/1, metal, double-hung sash windows. The roof is hipped clad in asphalt shingles with wide eaves.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1990. It incorporates a wood frame structural system clad in vinyl siding. The shed features a single-leaf, metal, paneled door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **517 West 29th Street**
PROPERTY NAME: House, 517 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0017
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1912. It incorporates a brick foundation and a wood frame structural system. The first story is clad in vinyl siding and the second story is clad in wood shingles. The north façade features a two-story, one-bay porch with an asphalt-shingled, hipped roof; paneled, wood piers; and plain, wood balustrades. The primary entrance is comprised of a single-leaf, metal door with a light and a wrought iron storm door surmounted by a boarded transom. There is a single-leaf door with a storm door accessing the second story porch. The house features 1/1, metal, double-hung sash windows. The roof is hipped clad in asphalt shingles with wide eaves.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1990. It incorporates a wood frame structural system clad in vinyl siding. The shed features a single-leaf, metal, paneled door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **521 West 29th Street**
PROPERTY NAME: House, 521 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0016
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1906. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The north façade features a one-story, two-bay porch that is partially incorporated under the main roof on the east elevation. The porch features an asphalt-shingled, hipped roof; a boxed cornice; wood, Tuscan columns; and a plain, wood balustrade. There is a

one-bay porch incorporated under the main roof on the second story of the east elevation. The second story porch is accessed by a single-leaf, metal, paneled door with a storm door surmounted by a transom. The porch features a wood, Tuscan column; and balustrade clad in wood shingles on the north façade. The primary entrance is located on the west end of the façade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door. The house features individual and paired, 1/1, wood double-hung sash windows with storm windows. The second story of the facade features a Palladian window comprised of a louvered shutter surmounted by a rounded-arch panel with an articulated keystone flanked by 1/1, double-hung sash windows. There is a gable-roofed dormer on the façade that features a 1/1, metal, double-hung sash window. There is also a gable-roofed dormer on the east elevation that features a wood, casement window. The closed gables on the dormers are clad in fishscale-cut, wood siding. There is a two-story, projecting, canted bay on the west elevation that features window openings on the canted walls. The canted bay is surmounted by a hipped roof that intersects with the main hipped roof. The roof is clad in asphalt shingles and features a wide frieze. The house features an interior, brick chimney with a corbelled cap on the west elevation. There is a two-story porch appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **525 West 29th Street**
PROPERTY NAME: Apartment Building, 525 West 29th Street
OTHER NAME (S): Chatillon Apartments
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0015
DESCRIPTION (S):
This is a three-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a parged brick foundation and structural system. The north façade features two, three-story, one-bay porches with a common, asphalt-shingled, hipped roof with exposed, wood rafters under the eaves. The porches feature brick piers and wood balustrades with diagonal balusters. The primary entrance is centrally located and is comprised of double-leaf, metal and plate glass doors. There are single-leaf, metal, paneled doors accessing each of the porches. The building features individual and paired, 1/1, metal, double-hung sash windows with rowlock brick sills. The roof is flat with a stepped parapet on the side elevations. The façade features a corbelled cornice and the parapet is coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **609 West 29th Street**
PROPERTY NAME: House, 609 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1951
DHR NUMBER (S): 122-5087-0011
DESCRIPTION (S):
This is a one-story house designed in the Colonial Revival style and constructed in 1951. It incorporates a concrete block foundation and wood frame structural system clad in asbestos siding. The north façade features a

one-story, one-bay porch with an asphalt-shingled, gable roof; wood, turned posts; and turned balusters. The primary entrance is centrally located and is comprised of a single-leaf, metal, paneled door with two lights and a storm door. The house features 6/6, metal, double-hung sash windows. Non-functional shutters flank the façade windows. There is a single-leaf door on the west elevation. The roof is side gable clad in asphalt shingles. The house features a central, interior, brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **611 West 29th Street**
PROPERTY NAME: House, 611 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0010
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door. The transom and sidelights surrounding the entrance have been clad in vertically hung vinyl siding. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows. The roof is side gable clad in asphalt shingles. There is a one-story, shed-roofed ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **613 West 29th Street**
PROPERTY NAME: House, 613 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0009
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a two-story porch with a shed roof extending from the main roof. The first story porch features battered, wood piers; a plain, wood balustrade; and a false, asphalt-shingled, hipped roof with visible wood rafters under the eaves. The second story porch has been enclosed. The lower portion of the second story porch is clad in vinyl siding and the upper portion is clad in weatherboard. The porch cladding is punctuated by 1/1, metal, double-hung sash windows. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light. The transom and sidelights surrounding the entrance have been clad in horizontal wood siding. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles. The house features an interior, parged brick chimney with a corbelled cap on the east elevation. There is a one-story, shed-roofed ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **617 West 29th Street**
PROPERTY NAME: Apartment Building, 617 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0007
DESCRIPTION (S):
This is a two-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1912. It incorporates a parged brick foundation and a brick structural system. The side elevations have been parged and the façade is clad in common bond brick veneer with raised brick quoins. The north façade features two, two-story, one-bay porches with a common, asphalt-shingled, shed roof. The side elevations of the shed roof are clad in vinyl siding. The porch features vinyl-clad, battered piers resting on brick pedestals; and plain, wood balustrades. The primary entrance is centrally located and recessed from the façade. Above the entrance on the second story between the porches is a vinyl-clad enclosure. There are four individual entrances that are comprised of single-leaf, metal, paneled doors with storm doors surmounted by transoms on the first story facade. There are also single-leaf doors accessing the second story porches. The building features 1/1, wood, double-hung sash windows with storm windows. The windows features rowlock brick sills. The roof is flat behind a parapet.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **635 West 29th Street**
PROPERTY NAME: House, 635 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1929
DHR NUMBER (S): 122-5087-0004
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1929. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a two-story porch. The first story porch is two bays and features a false, asphalt-shingled, hipped roof; battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The second story porch is incorporated under a partial shed-roofed extension of the main roof. It features two bays; a vinyl-clad balustrade; and clustered, wood posts. The primary entrance is comprised of a single-leaf, metal, paneled door. The transom and sidelights surrounding the entrance are clad in plywood. There is a single-leaf door with a screen door accessing the second story porch. The house features 1/1, wood, double-hung sash windows with storm windows. The windows on the first story façade have been boarded with plywood. The roof is side gable clad in asphalt shingles. There is a one-story, shed-roofed ell appended to the south elevation.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1940. It incorporates a wood frame structural system clad in vinyl siding. The shed features a single-leaf, metal paneled door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **637 West 29th Street**
PROPERTY NAME: House, 637 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0003
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, three-bay porch incorporated under the main roof. The porch features clustered, wood posts resting on brick pedestals; and a plain, wood balustrade. The primary entrance is central located and is comprised of a single-leaf, metal paneled door. The house features 1/1, metal, double-hung sash windows. There is an intersecting gable on the façade that features an 8/1, wood, double-hung sash window. The roof is hipped clad in asphalt shingles with exposed, wood rafters under the eaves. The house features an interior, parged brick chimney with a corbelled cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **639 West 29th Street**
PROPERTY NAME: House, 639 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0001
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1912. It incorporates a parged brick foundation and a wood frame structural system clad in vinyl siding. The vinyl siding was added in 1987. The north façade features a one-story, four-bay porch with an asphalt-shingled, hipped roof; and replacement, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door. There is a one-story, projecting, canted bay surmounted by a closed gable on the east end of the second story façade. The closed gable features a 1/1, wood, double-hung sash window. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is hipped-cross-gable clad in asphalt shingles. The dormer on the east elevation features a 1/1, double-hung sash window and cornice returns. The intersecting gable on the west elevation is closed. The house features a central, interior, parged brick chimney with a cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **700 West 29th Street**
PROPERTY NAME: House, 700 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0584

DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch incorporated under the main roof. The porch features battered, wood piers resting on brick pedestals and a wrought iron balustrade. The primary entrance is comprised of a single-leaf door with a storm door. There is an oversized, shed-roofed dormer on the south façade that shelters an enclosed, second story porch. The second story porch is clad in vinyl siding and punctuated by metal, sliding windows. The house features individual and paired, 1/1, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles. There is a one-story, projecting, squared block with an asphalt-shingled, shed roof on the east elevation.

- This is a one-story, two-car garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in vinyl siding. The garage features two, metal, paneled, roll-up doors. The roof is side gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **701 West 29th Street**
PROPERTY NAME: House, 701 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0585
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a brick foundation and wood frame structural system. The first story is clad in common bond brick veneer and the second story is clad in vinyl siding. The north façade features a two-story porch incorporated under the main roof. The first story porch features stack bond brick piers and a brick balustrade. The second story porch features plain, wood posts and balustrade. The primary entrance is centrally located and is comprised of a single-leaf, metal, paneled door. There is a single-leaf, wood paneled door with six lights and a storm door accessing the second story porch. The house features 1/1 and 6/6, metal, double-hung sash windows. The façade gable features a Palladian window comprised of a 1/1, metal, double-hung sash window flanked by 6-light, metal windows. Portions of the vinyl siding have been removed on the façade gable revealing wood shingles. The house features gable-roofed wall dormers with paired, double-hung sash windows on the east and west elevations. The roof is gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **702 West 29th Street**
PROPERTY NAME: House, 702 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0586
DESCRIPTION (S):

This is a two-story house designed in the Colonial Revival style and constructed in 1918. It incorporates a brick foundation and wood frame structural system. The south façade is clad in common bond brick veneer and the remaining elevations are clad in vinyl siding. The south façade features a two-story porch with an asphalt-shingled, gable roof. The first story porch has three bays and features battered, wood piers resting on brick pedestals; a brick balustrade; and a wide frieze. The second story porch features paneled, wood posts; a plain, wood balustrade; and a boxed cornice with a wide frieze. The porch is surmounted by a closed gable clad in wood shingles. The primary entrance is comprised of a single-leaf, door with a multiple-light storm door. There is a single-leaf, wood, paneled door with nine lights and a storm door accessing the second story porch. The house features 6/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles with cornice returns on the side elevations.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **703 West 29th Street**
PROPERTY NAME: Apartment Building, 703 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-0587
DESCRIPTION (S):
This is a two-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1921. It incorporates a 7-course American bond brick foundation and structural system. The north façade is clad in common bond brick veneer. The north façade features two, two-story, one-bay porches sheltered by a common asphalt-shingled, shed roof. The porch features brick piers and plain, wood balustrades. A single-leaf door accesses each porch. The primary entrance is centrally located between the porches. The entrance is comprised of a double-leaf, wood, paneled door with a light surmounted by a soldier-course brick. The building features 1/1, wood, double-hung sash windows with storm windows. The façade windows are surmounted by soldier-course brick and feature rowlock brick sills. The windows on the side elevations feature 2-course, brick, jack arches and rowlock brick sills. The roof is flat with a stepped parapet on the side elevations. There is a corbelled cornice on the north façade and the parapet is coped in a header brick course.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **704 West 29th Street**
PROPERTY NAME: House, 704 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0588
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1918. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a two-story, one-bay porch with an asphalt-shingled, hipped roof. The first story porch features battered, wood piers resting on

brick pedestals; a plain, wood balustrade; and a wide frieze. The second story porch features paneled, wood posts; a plain, wood balustrade; and a boxed cornice with a wide frieze. The primary entrance is comprised of a single-leaf, door with a wrought iron storm door. There is a single-leaf, wood, paneled door with nine lights and a storm door accessing the second story porch. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles with cornice returns on the side elevations. There is a one-story, shed-roofed ell appended to the north elevation.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1990. It incorporates a wood frame structural system clad in vinyl siding. It features a single-leaf, metal, paneled door and a fixed, metal window. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **706 West 29th Street**
PROPERTY NAME: House, 706 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0589
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1918. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a two-story, one-bay porch with an asphalt-shingled, hipped roof. The first story porch features battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The second story porch features paneled, wood posts; and a plain, wood balustrade. The friezes on the first and second story porch have been clad in vertically hung, vinyl siding. The primary entrance is comprised of a single-leaf, wood door with multiple-lights and a wrought iron storm door. There is a single-leaf, wood, paneled door with nine lights and a storm door accessing the second story porch. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. The façade windows are flanked by non-functional shutters and the windows in the side elevation gables are surmounted by metal awnings. The roof is side gable clad in asphalt shingles with cornice returns on the side elevations.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **707 West 29th Street**
PROPERTY NAME: House, 707 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1951
DHR NUMBER (S): 122-5087-0590
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Modern Movement style and constructed in 1951. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, one-bay porch with an asphalt-shingled, hipped roof; and wrought iron posts and

balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a light and a wrought iron storm door. The house features 3/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows. The roof is side gable clad in asphalt shingles. The house features a central, interior, brick chimney with a cap.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1955. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, roll-up door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **708 West 29th Street**
PROPERTY NAME: House, 708 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0591
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1918. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a two-story, one-bay porch surmounted by an asphalt-shingled, gable roof. The first story porch features battered, wood piers resting on brick pedestals; wrought iron posts; and a wrought iron balustrade. The second story porch features paneled, wood posts; and a plain, wood balustrade. The friezes on the first and second story porch have been clad in vertically hung, vinyl siding. The primary entrance is comprised of a single-leaf, wood door with a storm door. There is a single-leaf, wood door with a storm door accessing the second story porch. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles with cornice returns on the side elevations.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **712 West 29th Street**
PROPERTY NAME: House, 712 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1964
DHR NUMBER (S): 122-5087-0592
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1964. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a common bond brick plinth and rowlock brick watertable. The primary entrance is comprised of a single-leaf door with a wrought iron storm door surmounted by a metal awning. The house features 1/1, metal, double-hung sash windows. Metal awnings surmount the windows on the façade and west elevation. Non-functional shutters also flank the façade windows. The roof is side gable clad in asphalt shingles.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1965. It incorporates a wood frame structural system clad in aluminum siding. The garage features a single-leaf, metal door. The roof is gable clad in asphalt shingles.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **715 West 29th Street**
PROPERTY NAME: House, 715 West 29th Street
OTHER NAME (S): Duplex, 715 West 29th Street
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0593
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1919. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood posts; and turned balusters. There are two entrances on the façade. The entrances are comprised of single-leaf, wood, paneled doors with storm doors surmounted by a common transom. There is a one-story, projecting, squared bay surmounted by a closed gable on the west end of the façade. The house features individual and tripartite, 1/1, wood, double-hung sash windows with storm windows. The roof is hipped-cross-gable clad in asphalt shingles. The house features a central, interior, brick chimney with a corbelled cap. There is a two-story addition with an incorporated porch on the first story appended to the south elevation. This house has been converted into a duplex.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1940. It incorporates a wood frame structural system clad corrugated metal siding. The shed features a single-leaf, corrugated metal door and 1/1, metal, double-hung sash windows. The roof is side gable clad in corrugated metal.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **717 West 29th Street**
PROPERTY NAME: House, 717 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0594
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1919. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story porch with an asphalt-shingled, hipped roof. The porch has been enclosed with vinyl siding and screens. The porch entrance is comprised of a single-leaf, storm door. The primary entrance to the house is comprised of a single-leaf, door with a storm door surmounted by a transom. The house features individual, 1/1, metal, double-hung sash windows. The roof is hipped clad in asphalt shingles. There is a hip-roofed dormer on the north façade that features paired, louvered vents. The house features an interior, brick chimney with a cap on the east

elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **719 West 29th Street**
PROPERTY NAME: House, 719 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0595
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1919. It incorporates a brick foundation and wood frame structural system. The first story is clad in vinyl siding and the second story in clad in wood shingles. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, door with a storm door surmounted by a 5-light transom and flanked by 5-light sidelights. The house features individual and paired, 1/1, metal, double-hung sash windows. The roof is gable clad in asphalt shingles. The façade gable is closed and features a metal, louvered vent, boxed cornice and raking cornice. There is a one-story ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **721 West 29th Street**
PROPERTY NAME: House, 721 West 29th Street
OTHER NAME (S): Duplex, 721 West 29th Street
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0596
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1919. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood piers resting on brick pedestals; and a replacement, wood balustrade. A shed-roofed enclosure has been added to the porch roof. There are two entrances on the façade. The entrances are comprised of a single-leaf, wood, paneled doors surmounted by transoms. The house features individual and paired, 6/6 and 6/1, wood, double-hung sash windows with storm windows. The roof is gable clad in asphalt shingles. There is a one-story ell appended to the south elevation. This house has been converted into a duplex.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **723 West 29th Street**
PROPERTY NAME: House, 723 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0597

DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story porch with an asphalt-shingled, hipped roof; wide frieze; wood, Tuscan columns resting on parged brick pedestals; a replacement, wood balustrade. The balusters spell "TAYLOR." The primary entrance to the house is comprised of a single-leaf, metal, paneled door with a storm door surmounted by a transom. The house features individual and tripartite, 6/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles. There is a hip-roofed dormer on the north façade that features a louvered vent; a fixed, wood window; and a wide frieze.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **727 West 29th Street**
PROPERTY NAME: House, 727 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0598
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1918. It incorporates a parged brick foundation and wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood posts; and turned balusters. The primary entrance is comprised of a single-leaf, wood, paneled doors with two lights and a storm door surmounted by an aluminum-clad transom. The house features individual and paired, 1/1, metal, double-hung sash windows. The roof is gable clad in asphalt shingles. The house features an interior, brick chimney with a corbelled cap.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1940. It incorporates a wood frame structural system clad corrugated metal siding. The shed features a double-leaf, corrugated metal door. The roof is gable clad in corrugated metal.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **729 West 29th Street**
PROPERTY NAME: House, 729 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0599
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The north façade features a two-story, two-bay porch incorporated under the main roof. The first story porch features a false, asphalt-shingled, hipped roof; battered, wood piers resting on brick pedestals; and a replacement, wood balustrade. The second story porch has been enclosed with aluminum siding and screens. The primary entrance is comprised of a single-leaf,

wood, paneled door with a storm door. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles. There is a gable-roofed dormer on the north façade that features paired, 1/1, wood, double-hung sash windows with storm windows. The house features an interior, parged brick chimney on the west elevation. There is a one-story, shed-roofed porch appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **731 West 29th Street**
PROPERTY NAME: House, 731 West 29th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0600
DESCRIPTION (S):
This is a two-story house designed in the Dutch Colonial Revival style and constructed in 1919. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, shed roof; wood posts; and a wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a storm door. The house features individual and tripartite, 1/1, wood, double-hung sash windows with storm windows. The second story façade windows are surmounted by pent roof supported by brackets. The roof is gambrel clad in asphalt shingles with shed-roofed dormers on the east and west elevations. The house features two interior, brick chimneys with corbelled caps flanking the dormer on the west elevation. The southernmost chimney has been parged.
CONTRIBUTING (1 - building)

West 30th Street

PROPERTY ADDRESS: **104 West 30th Street**
PROPERTY NAME: Duplex, 104 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1897
DHR NUMBER (S): 122-5087-0604
DESCRIPTION (S):
This is a two-story duplex designed in the Late 19th and Early 20th Century American Movement style and constructed in 1897. It incorporates a 6-course, American bond brick foundation and structural system. The south façade is clad in common bond brick veneer. The south façade features a one-story, four-bay porch with an asphalt-shingled, shed roof; a boxed cornice; a wide frieze; and plain, wood posts and balustrade. There are two centrally placed entrances on the façade that are comprised of single-leaf, wood doors with storm doors surmounted by vinyl-clad transoms. The entrances are flanked by paired, double-hung sash windows. The windows and doors features rusticated stone lintels. There are two, one-story, projecting, canted bays on the

second story façade. The canted bays are clad in vinyl siding and features 6/6 and 4/4, metal, double-hung sash windows. The house features individual and paired, 6/6 and 9/9, wood, double-hung sash windows. There are window openings on the second story façade above the entrance, which have filled with vinyl siding. The windows on the side elevations are surmounted by two-courses of rowlock brick segmental arches. The south façade features corbelled brick banding surmounted by a hexagonal and cross motif frieze and a wood, bracketed cornice. The windows on the façade brick wall are flanked by polychrome brick surrounds including flat arches with articulated keystones. There are also polychromed quoins at the façade corners. The roof is flat with a stepped parapet on the side elevations. The parapet is coped in rowlock course bricks. The building features brick four chimneys with corbelled cap embedded in the side elevation walls.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **110 West 30th Street**
PROPERTY NAME: House, 110 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1897
DHR NUMBER (S): 122-5087-0605
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1897. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The south façade features a two-story, projecting, squared block surmounted by a closed gable. The closed gable is clad in fishscale cut, wood shingles and features a wood, louvered vent; and a dentiled cornice. The first story facade features a one-story, three-bay porch that wraps around the projecting block on the east end. The porch is comprised of an asphalt-shingled, hipped roofed; and replacement, wood posts. The primary entrance is comprised of a single-leaf, metal, paneled door surmounted by a transom. There is a one-bay, shed-roofed porch on the southeast corner of the house on the main porch with a wood, turned post and bracketed capitals. There is a single-leaf, wood, paneled door with a boarded light accessing the second story porch. The house features individual and paired, 1/1 and 2/2, wood, double-hung sash windows with storm windows. The roof is cross-gable clad in asphalt shingles with a dentiled cornice. The cornice closes the gables on the side elevations. The closed gables are clad in fishscale-cut, wood shingles and feature louvered vents and dentiled raking cornices. The house features an interior, brick chimney with a corbelled cap on the west elevation. There is a two-story porch appended to the north elevation. The second story of the north elevation porch features turned posts and a wrought iron balustrade.

- This is a one-story garage designed in the Modern Movement and constructed circa 1970. It incorporates a concrete block masonry structural system and an asphalt-shingled gable roof.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **114 West 30th Street**
PROPERTY NAME: House, 114 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906

DHR NUMBER (S): 122-5087-0606
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1906. It incorporates a parged brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; and replacement, wood posts and balustrade. The primary entrance and windows on the first story have been boarded with plywood. The house features 1/1, metal, double-hung sash windows. There is a two-story, projecting, squared bay surmounted by a closed gable on the east elevation. The roof is a gable clad in asphalt shingles with a boxed cornice and a wide frieze. The façade gable is clad in fishscale-cut, wood shingles and features a rounded arch, louvered vent; and a dentiled cornice. The house features an interior, parged brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **118 West 30th Street**
PROPERTY NAME: House, 118 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1897
DHR NUMBER (S): 122-5087-0607
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1897. It incorporates a brick foundation and wood frame structural system clad in weatherboard. The south façade features a two-story, projecting, squared block surmounted by a closed gable. On the south façade of the projecting block there is a narrow, two-story, projecting, squared bay surmounted by a hipped roof. The first story facade features a one-story, two-bay porch that wraps around the projecting block on the east end. The porch is comprised of an asphalt-shingled, hipped roofed; wood, turned posts; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door surmounted by a transom. There is a tower with flared eaves on the southeast corner of the house that shelters a second story porch with a wood, turned post and turned balusters. There is a single-leaf door accessing the porch. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is cross-gable clad in asphalt shingles. There is a two-story porch at the northeast corner.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **120 West 30th Street**
PROPERTY NAME: House, 120 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-0608
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1914. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a boxed cornice; a wide frieze; wood,

Tuscan columns resting on parged pedestals; and turned balusters. The primary entrance is a single-leaf, wood, paneled door surmounted by a 7-light transom and flanked by 3-light sidelights. There is a two-story, projecting, canted bay at the east end of the facade. The house features wood, Queen Anne, double-hung sash windows. The façade features a closed gable with paired, 1/1, metal, double-hung sash windows. The roof is cross-gable clad in asphalt shingles. The house features an interior, parged brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **122 West 30th Street**
PROPERTY NAME: House, 122 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-0609
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1914. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a boxed cornice; a wide frieze; wood, Tuscan columns resting on brick pedestals; and turned balusters. The primary entrance is a single-leaf, wood, door with multiple lights surmounted by a 7-light transom and flanked by multiple light sidelights. The house features 1/1, metal, double-hung sash windows. There is a tripartite window of a fixed, wood window flanked by 1/1, wood, double-hung sash windows on the west elevation. The façade features a closed gable with a metal, sliding window. The roof is gable clad in asphalt shingles with a cornice and wide frieze. There is an intersecting gable on the west elevation that features a 1/1, wood, double-hung sash window. The house features an interior, brick chimney with a corbelled cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **202 West 30th Street**
PROPERTY NAME: Apartment Building, 202 West 30th Street
OTHER NAME (S): Waldron Apartments
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0610
DESCRIPTION (S):
This is a three-story apartment building designed in the Colonial Revival style and constructed in 1920. It incorporates a brick foundation and a brick structural system. The south façade features beltcourses between the second and third stories and brick quoins. The primary entrance is centrally located and is comprised of a single-leaf door with a storm door flanked by boarded sidelights and surmounted by a metal awning. Brick stairs with a wrought iron balustrade accesses the entrance. The windows on the first story have been boarded. Metal awnings surmount the façade windows on the first story. The building features 8/1, 6/2, and 6/1, wood, double-hung sash windows surmounted by flat arches with articulated keystones. The east elevation features a metal fire escape with single-leaf doors accessing it at each story. The roof is side gable clad in asphalt shingles

with a dentiled cornice. There is a false gambrel roof on the side elevations that features a dentiled cornice with returns and modillions. There are eyebrow, louvered vents with articulated keystones on the side elevations. There is a two-story, gable-roofed ell appended to the north elevation of the building.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **206 West 30th Street**
PROPERTY NAME: House, 206 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1900
DHR NUMBER (S): 122-5087-0611
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1900. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The south façade features a two-story, projecting, squared block surmounted by a closed gable. The closed gable is clad in fishscale-cut, wood shingles and features a 1/1, wood, double-hung sash window and a boxed cornice. The south facade features a one-story, three-bay porch that wraps around the projecting block on the east end. The porch is comprised of an asphalt-shingled, shed roof; replacement, wood posts; and a lattice balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door surmounted by a boarded transom. The house features 1/1, wood, double-hung sash windows. The roof is cross-gable clad in asphalt shingles with a boxed cornice. There is a two-story, projecting, canted bay surmounted by a closed gable on the west elevation. There is an intersecting gable on the east elevation. The house features two, interior, brick chimneys with corbelled caps on the west elevation. There is a two-story ell appended to the north elevation.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1940. It incorporates a wood frame structural system clad in vertical board siding. The shed features a single-leaf, wood, 6-panel door and fixed, wood windows. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **208 West 30th Street**
PROPERTY NAME: House, 208 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-0612
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1905. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; a dentiled cornice; wood, turned posts; and an asbestos-clad balustrade. The primary entrance is comprised of a single-leaf, wood, 6-panel, one-light door with a storm door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting squared bay on the west end of the façade surmounted by a closed gable. The closed gable is clad in fishscale cut, wood shingles and features a Palladian window of a 1/1, wood double-hung

sash window with a rounded arch upper light flanked by fixed, wood windows; and a raking cornice. The roof is hipped clad in asphalt shingles with a cornice and wide frieze. There is a hip-roofed dormer on the east elevation. There is a one-story porch with wood, turned posts appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **210 West 30th Street**
PROPERTY NAME: House, 210 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-0613
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1905. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; and wrought-iron posts and balustrade. The primary entrance is comprised of a single-leaf, wood, door with a light and a storm door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. There is a closed gable intersecting the south façade. The closed gable is clad in fishscale cut, wood shingles and features a Palladian window of a 1/1, wood double-hung sash window with a rounded arch upper light flanked by fixed, wood windows; and a raking cornice. The roof is hipped clad in asphalt shingles with a cornice and wide frieze. The house features two, interior, parged brick chimneys with corbelled caps on the west elevation. There is a one-story ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **211 West 30th Street**
PROPERTY NAME: House, 211 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0614
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and wood frame structural system. The first story is clad in vinyl siding, and the second story is clad in wood shingles. The north façade features a one-story porch incorporated under the main roof. The porch features vinyl-clad, battered piers; and a vinyl-clad, closed balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a storm door. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. There is an oversized, shed-roofed dormer on the north façade. The dormer features a tripartite window of 6/1, wood, double-hung sash windows and brackets under the rakes. The roof is side gable with brackets under the wide rakes on the side elevations. There is a one-story, projecting, squared bay with a shed roof on the west elevation. The house features an interior, brick chimney with a corbelled cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **212 West 30th Street**
PROPERTY NAME: House, 212 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0615
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1906. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a two-story, projecting, squared block surmounted by a closed gable. The closed gable is clad in fishscale cut, wood shingles and features a fixed, wood, stained-glass window and a raking cornice. The south facade features a one-story, three bay porch that wraps around the projecting block on the east end. The porch is comprised of an asphalt-shingled, hipped roof; wood, turned posts with spindle-bracket capitals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door surmounted by a transom. The house features 1/1, metal, double-hung sash windows. The roof is hipped clad in asphalt shingles with a boxed cornice.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **213 West 30th Street**
PROPERTY NAME: House, 213 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-0616
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1905. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, wraparound porch with a standing-seam metal, hipped roof; brick piers resting on brick pedestals; a wide frieze; and turned balusters. The primary entrance is comprised of a single-leaf, wood, paneled door surmounted by a transom with oval-shaped lights and is flanked on the east by a sidelight. The house features 1/1 and 2/2, wood, double-hung sash windows with storm windows. There is a one-story, projecting canted bay on the east end of the second-story façade surmounted by a closed gable. There is a one-story, three-sided oriel supported by carved, wood brackets on the west elevation. The oriel features an asphalt-shingled, hipped roof; and a 1/1, metal, double-hung sash window flanked by fixed, metal windows on the side walls. There is a two-story, projecting, rounded bay surmounted by a closed gable on the east elevation. There is a wood staircase appended to the east elevation accessing a single-leaf door on the second story. The roof is hipped-cross-gable clad in asphalt shingles. The house features an interior, brick chimney on the east elevation and a central, interior, brick chimney with a corbelled cap. There is a one-story ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **215 West 30th Street**

PROPERTY NAME: House, 215 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-0617
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1905. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; and wrought iron posts and balustrade. The exterior door has been relocated within the vestibule. The original transom remains. The primary entrance is comprised of a single-leaf, wood, paneled door with a storm door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. There is a one-story, projecting canted bay on the east end of the second-story façade surmounted by a closed gable. The closed gable features a Palladian window comprised of a pointed arch, wood window flanked by louvered vents. The roof is hipped clad in asphalt shingles. The house features two, interior, brick chimneys on the east elevation. There is a one-story ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **217 West 30th Street**
PROPERTY NAME: House, 217 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1909
DHR NUMBER (S): 122-5087-0618
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1909. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; clustered, wood posts resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a boarded transom. The house features 1/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting canted bay on the east end of the façade surmounted by a closed gable. The closed gable features a 6/6, wood, double-hung sash window with a storm window and a raking cornice. The roof is hipped-cross-gable clad in asphalt shingles with a boxed cornice. There are intersecting gables on the east and west elevations. The house features an interior, parged brick chimney on the east elevation and a central, interior, brick chimney with a corbelled cap. There is a one-story ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **220 West 30th Street**
PROPERTY NAME: House, 220 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1904
DHR NUMBER (S): 122-5087-0619

DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1904. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, shed roof; and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal door surmounted by a boarded transom. The house features 1/1 and 6/6, metal, double-hung sash windows. There is a one-story, projecting canted bay on the west end of the second-story façade surmounted by a closed gable. The closed gable is clad in diamond- and squared-cut patterned wood shingles and features a rounded arch window opening that has been filled with a louvered vent. The roof is hipped clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **223 West 30th Street**
PROPERTY NAME: House, 223 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-0620
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1907. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; square, wood posts; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a boarded transom. The house features 1/1, wood, double-hung sash windows with storm windows. There is an oversized, gable-roofed dormer on the façade that features a 2/2, wood double-hung sash window, raking cornice with wide frieze and cornice returns. There is a one-story, projecting, canted bay on the west elevation. The roof is hipped-cross-gable clad in asphalt shingles. The intersecting gables on the side elevations are closed and feature 2/2, wood, double-hung sash windows.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **224 West 30th Street**
PROPERTY NAME: House, 224 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1904
DHR NUMBER (S): 122-5087-0621
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1904. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a two-story, projecting, canted bay surmounted by a closed gable. The first story facade features a one-story, three-bay porch that wraps around the projecting block on the east end. The porch is comprised of an asphalt-shingled, hipped roofed; and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, door with a storm door. The house features 1/1, metal, double-hung sash windows. The roof is hipped-cross-gable

clad in asphalt shingles with a boxed cornice. There are intersecting gables on the east and west elevations with vents. There is a one-story, projecting, canted bay on the east elevation that is surmounted by a balustrade and forms a balcony. The balcony is accessed by a single-leaf door with a storm door. The house features an interior, brick chimney with a corbelled cap on the west elevation and a central, interior, brick chimney with a corbelled cap.

- This is a one-story shed designed in the Modern movement style and constructed circa 1970. It incorporates a wood frame structural system clad in vertical board siding. The shed features a single-leaf, wood door and fixed, wood window. The roof is hipped clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **225 West 30th Street**
PROPERTY NAME: House, 225 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0622
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story porch with an asphalt-shingled, hipped roof; a plain, wood post, exposed rafters under the eaves; and an asbestos-clad balustrade at the east end. The west end of the porch has been enclosed and is clad in vinyl siding with a 1/6, metal, double-hung sash window punctuating the façade. The primary entrance is comprised of a single-leaf door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is gable clad in asphalt shingles with exposed, wood rafters under the eaves and projecting outriggers on the façade gable. The façade gable features a louvered vent. The house features an interior, brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **226 West 30th Street**
PROPERTY NAME: House, 226 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1909
DHR NUMBER (S): 122-5087-0623
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1909. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The southeast corner of the first story is canted. The south façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; boxed cornice; a wide frieze; and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light. The house features 1/1, metal, double-hung sash windows. There is a one-story, projecting, canted bay surmounted by a closed gable on the west end

of the second story façade. The closed gable features a raking cornice and a 1/1, metal, double-hung sash window. There are hip-roofed dormers on the façade and east elevation. There is an intersecting gable on the west elevation. The roof is hipped clad in asphalt shingles with a boxed cornice. There is a one-story ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **229 West 30th Street**
PROPERTY NAME: Apartment Building, 229 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1987
DHR NUMBER (S): 122-5087-0624
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1987. It incorporates a concrete block foundation and a wood frame structural system clad in vinyl siding. The north façade features three entrances on the first story and two entrances on the second story. The entrances are centrally located and comprised of single-leaf, metal, paneled doors. There is a wood staircase appended to the north façade that accesses the second story entrances. The second story entrances are sheltered by the extended eave of the main roof. The building features 6/6, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **230 West 30th Street**
PROPERTY NAME: House, 230 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-0625
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1907. It incorporates a brick foundation clad in rusticated stone veneer and wood frame structural system clad in vinyl siding. The southeast corner of the first story features a canted wall. The south façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light. The house features 1/1, metal, double-hung sash windows. There is a one-story, projecting, canted bay on the west end of the second story façade. The canted bay is surmounted by a hipped-roof with wide eaves. There are hip-roofed dormers on the façade and east elevation. The roof is hipped clad in asphalt shingles with a boxed cornice. There is a one-story ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **233 West 30th Street**
PROPERTY NAME: House, 233 West 30th Street

OTHER NAME (S):
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-0097 122-0671
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed circa 1905. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north facade features a partially screened, one-story, three-bay porch with an asphalt shingled, hipped roof; square, wood columns; and a vinyl-clad balustrade. The east end of the porch has been screened and is accessed by a single-leaf door with a wrought iron storm door. The primary entrance is comprised of a single-leaf, wood door with a light. The house features 1/1, metal, double-hung sash windows. There is a two-story, projecting, squared bay on the east end of the façade that is surmounted by an intersecting, hipped roof. There is a two-story, projecting tower on the northeast corner of the house surmounted by an octagonal roof. There is an intersecting, closed gable on the east elevation. There is a two-story, projecting, canted bay on the west elevation surmounted by a closed gable. The roof is hipped-cross-gable clad in asphalt shingles with a boxed cornice. The house features two, interior, brick chimneys with corbelled caps on the east and west elevations. There is a one-story ell appended to the south elevation.

- This is a one-story carport designed in the Modern Movement style and constructed circa 1970. It incorporates an open, wood frame structural system. The roof is gable clad in asphalt shingles.
- This is a one-story garage designed in the Modern Movement style and constructed circa 1945. It incorporates a wood frame structural system clad in vinyl siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)
NON-CONTRIBUTING (1 - structure)

PROPERTY ADDRESS: **237 West 30th Street**
PROPERTY NAME: House, 237 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1902
DHR NUMBER (S): 122-5087-0626
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed circa 1902. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; wood, fluted, square columns; turned balusters; boxed cornice; modillions; and spindlefrieze. The primary entrance is comprised of a single-leaf, wood, 2-panel door with a light and a multiple-light storm door surmounted by a transom. There is a two-story, projecting, squared bay on the east end of the façade surmounted by a hipped roof. There is a two-story tower located on the northeast corner of the house. The tower is surmounted by an octagonal roof with a metal finial. The house features 1/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, canted bay on the east elevations surmounted by a closed gable. There is a one-story, enclosed porch appended to the

south elevation. The porch features a shed roof; wood posts; and an asbestos-clad balustrade. There is an intersecting gable on the west elevation. The roof is hipped-cross-gable clad in asphalt shingles with a wide frieze and a modillion cornice. The house features a central, interior, parged brick chimney with a corbelled cap; and an interior, brick chimney with a corbelled cap on the east elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1940. It incorporates a wood frame structural system clad in asbestos siding. The garage features a roll-up, metal, paneled door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **238 West 30th Street**
PROPERTY NAME: House, 238 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-0084 122-0749
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1905. It incorporates a 7-course, American bond brick foundation and 7-course, American bond brick structural system. The south façade is clad in common bond brick veneer. The south façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; a wide frieze; clustered and paneled wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, 4-panel door with a light surmounted by a 3-light transom and flanked by sidelights. The house features 1/1, metal, double-hung sash windows; and four-light, casement, wood foundation windows. There is a tripartite, 1/1, metal, double-hung sash window with a bracketed sill on the second story of the east elevation. There is a one-story, projecting, canted bay on the west end of the first story façade. There is a two-story, projecting, canted bay surmounted by an intersecting gable with flared eaves on the east elevation. The gable is clad in wood shingles and features a 1/1, wood, double-hung sash window with a rounded arch upper sash and cornice returns. The house features gable-roofed dormers on the façade and east and west elevations. The dormers feature 1/1, wood, double-hung sash windows with rounded arch sashes lights; pilasters and keystones; and cornice returns. A dormer on the west elevation features a single-leaf door with a storm door accessed by metal stairs. The roof is hipped clad in asphalt shingles with a wide frieze. There are modillions under the eaves on the façade. The house features three, interior, brick chimneys with corbelled caps on the west and north elevations. There is a one-story, shed-roofed ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **241 West 30th Street**
PROPERTY NAME: House, 241 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1908
DHR NUMBER (S): 122-5087-0085 122-0752
DESCRIPTION (S):

This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1908. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The north façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; a rusticated stone-clad foundation; a wide frieze; square, wood columns; and turned balusters. An intersecting, closed gable surmounts the porch entrance. The primary entrance is comprised of a single-leaf door with a wrought iron storm door surmounted by a transom. The house features wood, Queen Anne and 1/1, double-hung sash windows. Non-functional shutters flanked some of the first story windows. Metal awnings surmounted the first story windows on the west elevation. The first story is canted on the northeast corner. There is a one-story, projecting, canted bay surmounted by a closed gable on the west end of the second story façade. The closed gable is clad in diamond-cut wood shingles and features a Palladian window comprised of a wood, Queen Anne window with a rounded arch upper sash flanked by wood, half arch windows; and scroll-cut brackets under the eaves. There is a two-story, projecting, canted bay surmounted by a closed gable on the east elevation. The closed gable features a 1/1, wood, double-hung sash window; and scroll-cut brackets under the eaves. There is a gable-roofed dormer on the façade that features a wood, Queen Anne window surmounted by a closed gable. There is a closed, intersecting gable on the west elevation. The roof is hipped-cross-gable clad in asphalt shingles with wide eaves. The house features an interior, brick chimney with corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **244 West 30th Street**
PROPERTY NAME: House, 244 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0096 122-0748
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation clad in rusticated stone veneer and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; a boxed cornice and a wide frieze; Corinthian columns; and a plain, wood balustrade. The porch wraps around the east elevation and has been enclosed. The enclosed portion is clad in vinyl siding punctuated by paired, double-hung sash windows. There is a wood, ramp appended to the east end of the porch. The primary entrance is comprised of a single-leaf, metal, 6-panel door with a storm door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, canted bay surmounted by a closed gable on the west end of the façade. The closed gable features a Palladian window of a 1/1, wood, double-hung sash window with a round arch upper sash with an articulated keystone flanked by fixed, wood, one-light windows. There are two-story, projecting, canted bays surmounted by closed gables on the east and west elevations. The roof is hipped-cross-gable clad in asphalt shingles with a boxed cornice. The house features an interior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **245 West 30th Street**

PROPERTY NAME: House, 245 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-0099 122-0670
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1905. It incorporates a parged brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood door with a storm door surmounted by a transom. There is a two-story, projecting, squared block on the east end of the façade. The bay is surmounted by a closed gable and features a fixed, wood window. The house features 1/1, metal, double-hung sash windows. Non-functional shutters flank the façade windows. There is a one-story ell appended to the east elevation. The roof is gable clad in asphalt shingles with a cornice and wide frieze. The house features two, interior, parged brick chimneys with corbelled caps on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **249 West 30th Street**
PROPERTY NAME: House, 249 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1913
DHR NUMBER (S): 122-5087-0627
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Bungalow style and constructed in 1913. It incorporates a parged brick foundation and a wood frame structural system clad in vinyl siding. The north façade features an enclosed, one-story, four-bay porch. The porch features battered wood piers and a vinyl-clad balustrade. The porch is clad in vinyl siding punctuated by window openings. There is a stoop surmounted by an intersecting gable on the west end of the façade. The stoop is comprised of a wrought iron balustrade surmounted by a metal awning. The porch roof is hipped with an intersecting gable at the west end clad in fishscale-cut wood shingles with brackets under the rakes and a wide frieze above the piers. The primary entrance is comprised of a single-leaf, wood, paneled door with a storm door. The house features paired and tripartite, 6/1, wood, double-hung sash windows with storm windows. The roof is gable clad in asphalt shingles with wide rakes. There is a shed-roofed dormer on the west elevation that features tripartite, 6/1, wood, double-hung sash windows with storm windows. The façade gable is clad in fishscale-cut, wood shingles and features paired, 6/1, wood, double-hung sash windows with storm windows and brackets under the eaves. There is a stoop on the west elevation that is comprised of metal stairs accessing a single-leaf, wood door that is surmounted by an asphalt-shingled, gabled-roof overhang supported by brackets. There is a single-leaf door with a storm door on the south elevation that is accessed by wood stairs. The house features an interior, parged brick chimney with a corbelled cap on the west elevation.

- This is a one-story garage constructed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, roll-up,

garage door; a single-leaf, metal door; and 4/4, metal, double-hung sash windows. The roof is gable clad in asphalt shingles.
CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **305 West 30th Street**
PROPERTY NAME: House, 305 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0628
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1920. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a two-story, two-bay porch with an asphalt-shingled, hipped roof. The first-story porch features wood, Tuscan columns and turned balusters. The east end of the first-story porch has been screened. The second-story porch features plain, wood posts and balustrade. The west end of the second-story porch has been enclosed and is clad in vinyl siding punctuated by window openings. The primary entrance is a comprised of a single-leaf, wood door surmounted by a transom and flanked by sidelights. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. There is a single-leaf door accessing the second-story porch on the canted wall of the projecting bay. The closed gable is clad in fishscale-cut, wood shingles and features a wood, casement window. The house features 1/1, metal, double-hung sash windows. The roof is hipped-cross-gable clad in asphalt shingles. There is a gable-roofed dormer on the east elevation that features paired, 1/1, wood, double-hung sash windows surmounted by a closed gable. There is an intersecting gable on the west elevation. The house features an interior, brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **306 West 30th Street**
PROPERTY NAME: House, 306 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0629
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1910. It incorporates a brick foundation and structural system. The south façade features a one-story, one-bay porch with an asphalt-shingled, gable roof; and plain wood posts and balustrade. The porch gable is clad in vinyl siding. The primary entrance is comprised of double-leaf; wood, 2-panel doors surmounted by a boarded transom. The house features 1/1, metal, double-hung sash windows with rusticated stone sills. The roof is gable clad in asphalt shingles. There is a two-story, projecting, squared addition appended to the east elevation. The addition incorporates a brick foundation and wood frame structural system clad in vinyl siding. There is a two-story porch with plain, wood posts and balustrade appended to the south elevation of the addition. The addition has a shed roof clad in asphalt shingles. There is a two-story porch

appended to the north end of the east elevation. The porch is comprised of an asphalt-shingled, shed roof and plain, wood posts and balustrade.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **307 West 30th Street**
PROPERTY NAME: House, 307 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-0630
DESCRIPTION (S):
This is a two-story Bungalow constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, three-bay porch incorporated under the main roof. The porch has been screened and features paneled, wood piers and plain wood balustrade. The porch is accessed by a single-leaf, screen door. The house features 6/1, wood double-hung sash windows with storm windows. There is a gable-roof dormer on the façade that features 1/1, metal, double-hung sash windows; brackets under the rakes; and exposed, scroll-cut, wood rafters. There is a squared oriel on the west elevation that features paired, 9/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles. The house features an exterior, brick chimney with a clay chimney pot on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **310 West 30th Street**
PROPERTY NAME: House, 310 West 30th Street
OTHER NAME (S): Apartment Building, 310 West 30th Street
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-0631
DESCRIPTION (S):
This is a house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1917. It incorporates a parged brick foundation and a wood frame structural system. The south façade is clad in common bond brick veneer and the side elevations are clad in vinyl siding. The primary entrance is centrally located and is comprised of a single-leaf, metal, door. The building features 6/6, metal, double-hung sash windows with rowlock brick sills. The roof is hipped clad in asphalt shingles. There is a hip-roofed dormer on the west end of the façade. The dormer is clad in vinyl siding and features paired, 1/1, metal, double-hung sash windows. A hipped roof addition has been appended to the east elevation. It maintains the height of the original house and features a hipped roof.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **312 West 30th Street**
PROPERTY NAME: House, 312 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1909

DHR NUMBER (S): 122-5087-0632
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1909. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wrought iron posts and balustrade; and a metal awning. The primary entrance is comprised of a single-leaf door with a storm door. There is a one-story, projecting, canted bay surmounted by a closed gable on the east end of the second story façade. The closed gable features a 6/1, wood, double-hung sash windows. The house features 1/1, metal, double-hung sash windows. The windows on the second story façade are surmounted by metal awnings. There is a gable-roofed dormer on the façade that features an 8/1, wood, double-hung sash window surmounted by a closed gable. There is a two-story, projecting, squared bay surmounted by a closed gable on the east elevation. There is a gable-roofed dormer with cornice returns on the west elevation. The roof is hipped-cross-gable clad in asphalt shingles. There is a one-story, shed-roofed ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **313 West 30th Street**
PROPERTY NAME: Duplex, 313 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-0633
DESCRIPTION (S):
This is a two-story duplex designed in the Queen Anne style and constructed in 1914. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a two-story, three-bay porch with an asphalt-shingled, hipped roof; a boxed cornice; and plain, wood posts and balustrade. There are two entrances on the west end of the façade that are comprised of single-leaf doors with storm doors. There is a single-leaf door with a storm door accessing the second-story porch. The duplex features 1/1, metal, double-hung sash windows. There is a two-story, projecting, canted bay surmounted by a closed gable on the on the east elevation. There is a two-story, projecting, squared block surmounted by a closed gable on the west elevation. There is a single-leaf door on the west elevation. The roof is cross-gable clad in asphalt shingles with a boxed cornice. The façade gable features a metal, casement window. The duplex features a central, interior, parged brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **315 West 30th Street**
PROPERTY NAME: Duplex, 315 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0634
DESCRIPTION (S):
This is a two-story duplex designed in the Craftsman style and constructed in 1920. It incorporates a poured

concrete wall foundation and a poured concrete masonry structural system. The north façade features a two-story, one-bay porch on the west end. The porch features a composite-tiled, hipped roof; exposed, rafters under the eaves; and poured concrete piers and balustrade. The primary entrance is located on the east end of the façade within a shallow vestibule. The entrance is comprised of a single-leaf, metal, paneled door surmounted by an asphalt-shingled, shed-roof overhang with exposed rafters supported by brackets. The duplex features 6/1, wood, double-hung sash windows with storm windows and concrete sills. There are single-leaf doors with storm doors surmounted by transoms accessing the first and second story porches. The porch roof extends to the east. The roof is flat with a parapet coped in metal. The building features two, wall, concrete chimneys with concrete caps on the south and west elevations.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **318 West 30th Street**
PROPERTY NAME: Apartment Building, 318 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1949
DHR NUMBER (S): 122-5087-0635
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1949. It incorporates a brick foundation and wood frame structural system. The façade is clad in stucco and the side and rear elevations are clad in Bricktex siding. The south façade features a two-story, five-bay porch incorporated under the extended main roof. The porch features plain, wood posts and balustrade. There are three, centrally located entrances on the façade that are comprised of single-leaf doors with lights. There are two, single-leaf doors accessing the second-story porch. The building features 1/1, metal, double-hung sash windows. The roof is flat clad in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **321 West 30th Street**
PROPERTY NAME: House, 321 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0636
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1912. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north facade features a one-story, one-bay porch with an asphalt-shingled, hipped roof; a boxed cornice; a wide frieze; wood, Tuscan columns resting on brick pedestals; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a storm door surmounted by a boarded transom. The house features individual and tripartite, 1/1, metal, double-hung sash windows. The roof is gable clad in asphalt shingles. The façade gable features brackets under the rakes and paired, 8-light, wood, casement windows. The house features an interior, brick chimney on the east elevation. There is a one-story porch

appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **323 West 30th Street**
PROPERTY NAME: House, 323 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1902
DHR NUMBER (S): 122-5087-0637
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1902. It incorporates a brick foundation and a wood frame structural system clad in weatherboard. The north facade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; a spindlefrieze; wood, turned posts with carved, scrolled, bracketed capitals; and turned balusters. The primary entrance is comprised of a single-leaf, metal door surmounted by a transom. The house features 2/2, wood, double-hung sash windows with storm windows. The roof is gable clad in asphalt shingles with a wide frieze and bracketed cornice.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **327 West 30th Street**
PROPERTY NAME: House, 327 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1900
DHR NUMBER (S): 122-5087-0638
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1900. It incorporates a parged brick foundation and a wood frame structural system clad in aluminum siding. The north facade features a one-story, one-bay porch with an asphalt-shingled, gable roof; plain, wood posts; and a closed balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door. The porch gable is clad in wood shingles. The house features 6/6, wood, double-hung sash windows with storm windows. The roof is gable clad in asphalt shingles with a wide frieze and bracketed cornice on the side elevations and returns on the façade. The house features two, interior, brick chimney with a corbelled caps on the east and south elevations. There is also a central, interior, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **400 West 30th Street**
PROPERTY NAME: House, 400 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1993
DHR NUMBER (S): 122-5087-0639
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1993. It is designed to

resemble a Queen Anne-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch that extends beyond the width of the façade. The porch features an asphalt-shingled, hipped roof; wood, turned posts; and a wood balustrade. The porch entrance is surmounted by an intersecting gable. The primary entrance is centrally located and is comprised of a single-leaf, metal, paneled door with a 12-light storm door and framed by a Classical surround. The house features 6/6, metal, double-hung sash windows. The roof is gable clad in asphalt shingles. The façade gable features a wide stringcourse above the second story windows and a 4/4, metal, double-hung sash window. There is a one-story, shed-roofed ell appended to the north elevation.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **401 West 30th Street**
PROPERTY NAME: House, 401 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0640
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1912. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north facade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; and wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light surmounted by a transom and flanked by sidelights. The house features individual and tripartite, 1/1 and 6/6, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles with exposed, wood rafters under the eaves. The house features hip-roofed dormers on the east and west elevations and the north façade. The dormers feature paired, 1/1, wood windows with storm windows and exposed rafters under the eaves. There is a one-story porch with wood, turned posts appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **404 West 30th Street**
PROPERTY NAME: Duplex, 404 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0641
DESCRIPTION (S):
This is a two-and-one-half-story duplex designed in the Queen Anne style and constructed in 1906. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south facade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a wide frieze; wood, Tuscan columns; and turned balusters. The porch foundation is clad in rusticated stone. There are two entrances on the façade that are comprised of single-leaf, wood, paneled doors with storm doors surmounted by transoms. The duplex features 9/1, wood, double-hung sash windows with storm windows. The roof is cross-gable clad in asphalt shingles with a wide frieze and boxed cornice. The façade gable features two, 4/1, wood, double-hung sash

windows with storm windows, and an arched vergeboard at the roof apex. The duplex features two, interior, brick chimney with a corbelled caps on the east and west elevations. There is also a central, interior, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **405 West 30th Street**
PROPERTY NAME: House, 405 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1913
DHR NUMBER (S): 122-5087-0642
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1913. It incorporates a parged brick foundation and a wood frame structural system clad in asbestos siding. The north facade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; fluted, Tuscan columns; a boxed cornice; and plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a light and storm door surmounted by a boarded transom and flanked by boarded sidelights. The facade features tripartite, 6/6, metal, double-hung sash windows. The side elevations features 1/1, wood, double-hung sash windows with storm windows. There is a one-story, projecting, canted bay on the west end of the second story façade. An asbestos-shingled, octagonal roof with a finial surmounts the canted bay. The roof is hipped clad in asbestos shingles with a wide frieze and cornice. There is a hip-roofed dormer on the façade that features a closed window. There is a hip-roofed dormer on the east elevation that features paired, 1/1, wood, double-hung sash windows. There is a one-story porch incorporated under the second story of the south elevation. The house features an interior, parged brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **406 West 30th Street**
PROPERTY NAME: House, 406 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0643
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a two-story, two-bay porch with an asphalt-shingled, hipped roof; a wide frieze; and plain balustrades. The first story porch features vinyl-clad, battered piers resting on brick pedestals, and the second story porch features vinyl-clad, battered piers. The primary entrance is comprised of a single-leaf, metal door. There is a single-leaf door with a storm door accessing the second-story porch. The house features paired, 6/2 and 1/1, wood, double-hung sash windows with storm windows. The roof is gable clad in asphalt shingles. The façade gable features a 1/1, wood, double-hung sash window and a triangular-shaped, louvered vent at the roof apex. There is a one-story porch appended to the north elevation.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **407 West 30th Street**
PROPERTY NAME: House, 407 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1913
DHR NUMBER (S): 122-5087-0644
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1913. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north facade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; a wide frieze; a boxed cornice; and turned balusters. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light surmounted by a boarded transom and flanked by boarded sidelights. The house features individual and tripartite, 1/1, metal, double-hung sash windows. There is a one-story, projecting, canted bay on the east end of the second story façade. The canted bay is surmounted by closed gable that is clad in diamond-cut, wood shingles and features a wood, louvered vent. The roof is hipped clad in asbestos shingles with a wide frieze and cornice. The house features an interior, parged brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **410 West 30th Street**
PROPERTY NAME: House, 410 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1902
DHR NUMBER (S): 122-5087-0645
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1902. It incorporates a 7-course, American bond brick foundation and structural system. The façade is clad in common bond brick and features brick quoins on the corners. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a wide frieze; and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light surmounted with by a transom clad in vertical board. The house features 1/1, metal, double-hung sash windows surmounted by brick flat arches with polychrome brick keystones on the facade. Windows on the side and rear elevations have rowlock course brick jack arches and stone sills. There is a hip-roofed wall dormer on the south façade that features paired, diamond-paned, wood windows. The roof is hipped clad in asphalt shingles with a wide frieze and cornice. There is a gable-roofed dormer on the east elevation. The house features an interior, brick chimney on the west elevation. There is a one-story, vinyl-clad addition appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **411 West 30th Street**
PROPERTY NAME: House, 411 West 30th Street

OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-0646
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1922. It incorporates a brick foundation and wood frame structural system. The first story is clad in plywood and the second story is clad in wood shingles. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The porch has been screened and features a double-leaf, wood, screen door. The primary entrance is comprised of a single-leaf, metal, paneled, door with a fan-shaped light. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles with a wide frieze and cornice. There is a hip-roofed dormer on the façade that features paired, 1/1, wood, double-hung sash windows. One of the paired dormer windows is missing.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system clad in vertical board. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **414 West 30th Street**
PROPERTY NAME: House, 414 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1993
DHR NUMBER (S): 122-5087-0136 122-0141
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1993. It is designed to resemble a Queen Anne-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; wood, turned posts; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door. The house features 6/6, metal, double-hung sash windows. Non-functional shutters flank the windows on the second story façade. The roof is gable clad in asphalt shingles. There is a louvered vent in the gable apex on the façade. The original building on this property was demolished.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **415 West 30th Street**
PROPERTY NAME: House, 415 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0647
DESCRIPTION (S):

This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1906. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features two-story, projecting, squared block surmounted by a closed gable on the west end. The closed gable features a 1/1, wood, double-hung sash window. There is a one-story, three-bay porch that has entrances on the north façade and the east elevation. The porch extends the length of the east elevation and is incorporated under a second-story, projecting, canted bay on the south end. The porch features an asphalt-shingled, hipped roof; wood, Tuscan columns; and a wood balustrade. The canted bay is surmounted by a closed gable that features a double-hung sash window. The house features 1/1, wood and 6/6, metal, double-hung sash windows. The roof is hipped-cross-gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **417 West 30th Street**
PROPERTY NAME: House, 417 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0648
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1906. It incorporates a brick foundation and a wood frame structural system clad in weatherboard. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; cornice with modillions; fluted, squared, wood piers; and a wood balustrade. The primary entrance is comprised of a single-leaf wood door with an oval light and a storm door surmounted by a transom and flanked by boarded sidelights. The house features Queen Anne, double-hung sash windows and 1/1, wood, double-hung sash windows. There is a one-story, projecting, canted bay on the west end of the second story façade. The canted bay is surmounted by an octagonal-shaped roof with a finial. There is a hip-roofed dormer on the façade that features a Queen Anne, wood, casement window and a cornice. There is a one-story, projecting, canted oriel on the second story of the east elevation. The roof is hipped clad in asphalt shingled with a wide frieze and cornice with modillions. The house features an interior, brick chimney on the east elevation. There is a one-story, shed-roofed ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **418 West 30th Street**
PROPERTY NAME: House, 418 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1993
DHR NUMBER (S): 122-5087-0649
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1993. It is designed to resemble a Colonial Revival-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; wood, turned posts; and a wood balustrade. The primary entrance is centrally

located and is comprised of a single-leaf, metal, paneled door with a storm door. The house features 6/6, metal, double-hung sash windows. The second story façade windows are flanked by non-functional shutters. The roof is gable clad in asphalt shingles. There is a one-story, shed-roofed ell appended to the north elevation.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **419 West 30th Street**
PROPERTY NAME: House, 419 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0650
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Dutch Colonial Revival style and constructed in 1906.It incorporates a brick foundation and wood frame structural system. The façade is clad in vinyl siding and the side and rear elevations are clad in Bricktex siding. The north façade features a one-story, two-bay porch that is incorporated under the main roof. The porch features fluted, squared, wood columns and a wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a transom and flanked by sidelights. There is a one-story, projecting, canted bay on the west end of the first story façade. The house features 1/1, wood double-hung sash windows with storm windows. The second story façade windows are 1/1, wood, double-hung sash with diamond-paned upper sashes. Wood shutters flank the second-story side elevation windows. There is a one-story, canted oriel on the second story of the west elevation. The oriel is surmounted by a closed gambrel roof with a double-hung sash window. The façade gambrel is clad in asbestos siding and features 6/1, wood, double-hung sash windows with storm windows flanked by wood shutters, and a raking modillion cornice. The roof is gambrel clad in asphalt shingles with a wide frieze and cornice with modillions. The house features an interior, parged brick chimney with a corbelled cap and a metal chimney pot on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **420 West 30th Street**
PROPERTY NAME: House, 420 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-0651
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Queen Anne style and constructed in 1915. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, three-bay porch incorporated under the main roof. The porch features a cornice; a wide frieze; wood, Tuscan columns resting on wood-paneled pedestals; and a wood balustrade. The primary entrance is centrally located on the façade and is comprised of a single-leaf door with a storm door surmounted by a boarded transom. The façade features fixed, wood windows surmounted by interlocking circle-paned clerestory windows. The house features individual and paired, 1/1 and 2/1, wood, double-hung sash windows with storm

windows. There is a two-story, projecting tower surmounted by a hexagonal-shaped roof on the southwest corner. There is an oversized, gable-roofed dormer on the façade that is clad in vinyl siding. The dormer features a tripartite window of a fixed, wood window flanked by 2/2, wood, double-hung sash windows. The dormer features a closed gable with a metal, louvered vent. The roof is side gable clad in asphalt shingled with a cornice and returns on the side elevations. On the west elevation, there is a gable hood supported by elongated modillions.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **422 West 30th Street**
PROPERTY NAME: Duplex, 422 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-0652
DESCRIPTION (S):
This is a two-and-one-half-story duplex designed in the Late 19th and Early 20th Century American Movement style and constructed in 1907. It incorporates a 7-course American bond brick foundation and structural system. The façade is clad in common bond veneer. The south façade features a replacement, one-story, three-bay porch with an asphalt-shingled, gable roof; and plain, wood posts and balustrade. There are two entrances on the façade. The entrances are comprised single-leaf, metal, paneled door with six lights surmounted by boarded transoms. The duplex features 1/1, wood, double-hung sash windows with storm windows surmounted by jack arches. The side elevation windows feature rowlock brick sills and the façade windows feature limestone sills. The roof is cross-gable clad in asphalt shingles with a boxed cornice. There are closed gables on the south façade and side elevations. The closed gables are clad in vinyl siding and feature paired, 1/1, wood, double-hung sash windows with storm windows. There are two, hip-roofed dormers on the south facade that feature 2/2, wood, double-hung sash windows.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **423 West 30th Street**
PROPERTY NAME: House, 423 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-0653
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1905. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; and oversized, battered, wood piers resting on brick pedestals. The primary entrance is comprised of a single-leaf, metal, paneled door surmounted by a transom. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable features a metal, casement window. The house features replacement, 6/6, metal, double-hung sash windows. The roof is hipped clad in asphalt shingles with a cornice. There is an intersecting gable on the west elevation.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **425 West 30th Street**
PROPERTY NAME: House, 425 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0654
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a boxed cornice; a wide frieze; and wood, Tuscan columns. The porch has been screened and features a storm door accessing it. There is a wood, wheelchair ramp appended to the north façade. The primary entrance is a single-leaf door with a storm door. The house features individual and tripartite, 1/1 and 4/4, wood, double-hung sash windows with storm windows. There is a one-story, hipped roof oriel on the west elevation between the first and second stories. There is a tripartite window of a 9-light, wood, casement windows flanked by 6-light, wood casement windows on the west elevation. The roof is gable clad in asphalt shingles. The façade gable is closed and features a tripartite window grouping. The house features two, interior, brick chimneys with corbelled caps on the east elevation and an interior, parged brick chimney with a corbelled cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **427 West 30th Street**
PROPERTY NAME: House, 427 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-0655
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1905. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; fluted, wood columns; and a wood balustrade. The primary entrance is comprised of a single-leaf door. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable features a 1/1, metal, double-hung sash window. The house features 1/1, metal, double-hung sash windows. The roof is hipped-cross-gable clad in asphalt shingles. There is an intersecting gable on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **428 West 30th Street**
PROPERTY NAME: House, 428 West 30th Street
OTHER NAME (S):

CONSTRUCTION DATE: 1903
DHR NUMBER (S): 122-5087-0656
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1903. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; wide frieze; and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is gable clad in asphalt shingles with a boxed cornice and returns on the façade. The façade gable features a 1/1, wood, double-hung sash window.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **429 West 30th Street**
PROPERTY NAME: House, 429 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0657
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1906. It incorporates a 7-course, American bond brick foundation and structural system. The north façade is clad in common bond brick veneer. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a cornice; wood, Tuscan columns resting on brick piers; and a wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with three lights surmounted by a transom. There is a two-story, projecting, rounded bay surmounted by a closed gable on the west end of the façade. The closed gable is clad in polychrome, diamond-cut and square-cut, slate shingles and features a 1/1, wood, double-hung sash window. The house features 1/1 and 1/2, wood, double-hung sash windows with storm windows and stone sills. The roof is hipped-cross-gable clad in polychromed slate roof shingles. There are intersecting gables on the east and west elevations. The house features an interior, brick chimney with a corbelled cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **430 West 30th Street**
PROPERTY NAME: House, 430 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1903
DHR NUMBER (S): 122-5087-0658
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1903. It incorporates a brick foundation and a wood frame structural system. The south façade is clad in weatherboard and the side elevations are clad in aluminum siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a wide frieze; wood, Tuscan columns resting on parged brick piers; and a wood

balustrade. There is a closed gable that surmounts the porch entrance on the east end. The primary entrance is comprised of a single-leaf door. There is a one-story, one-bay porch on the east end of the second story façade. The second-story porch is incorporated under the main roof and features a wood, turned post and a wood balustrade. There is a single-leaf, wood, paneled door with a storm door accessing the second story porch. There is a two-story, projecting, canted bay surmounted by a closed gable on the west end of the façade. The closed gable features paired, 1/1, wood, double-hung sash windows. The house features 9/1, wood, double-hung sash windows with storm windows. Several of the first story windows have been boarded. The roof is gable clad in asphalt shingles. There is a two-story, projecting, canted bay on the west elevation. The house features an interior, brick chimney with a corbelled cap on the west elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system clad in vertical board. The roof is clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **431 West 30th Street**
PROPERTY NAME: House, 431 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-0659
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1905. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a wide frieze; wood, Tuscan columns; and a plain, wood balustrade. There is a closed gable that surmounts the porch entrance on the west end. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is Jerkinhead-gable clad in asphalt shingles. The façade gable is closed and features paired, metal, awning windows with double-hung sash storm windows. The house features an interior, brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **434 West 30th Street**
PROPERTY NAME: House, 434 West 30th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1902
DHR NUMBER (S): 122-5087-0582
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1902. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. Six light casement windows punctuate the brick foundation on the west elevation. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; a modillion cornice; fluted, Tuscan columns resting on brick pedestals; a replacement, wood balustrade; and pilasters. The porch has a central entrance surmounted by a

projecting pediment with a boxed cornice and returns supported by paired, fluted, Tuscan columns resting on brick pedestals. The primary entrance is comprised of a single-leaf, wood, 18-light door surmounted by an 8-light transom and flanked by 12-light sidelights. There is a one-story, projecting squared bay on the west end of the second story façade. There is a projecting, canted bay surmounted by a closed gable on the second story of the squared bay. The closed gable is clad in hexagonal-cut, wood shingles and features a 12/1, wood, double-hung sash window; and a metal, louvered vent. The house features individual and paired, 9/1, wood, double-hung sash windows with storm windows. The southeast corner of the first story is canted. There is a one-story, projecting, canted bay, and a one-story, projecting, squared bay on the west elevation. There is a one-story, projecting, squared bay on the east elevation. The projecting bays feature asphalt-shingled, hipped roofs with modillion cornices. There is a gable-roofed dormer on the façade that features a 12/1, wood, double-hung sash window surmounted by a closed gable clad in hexagonal-cut, wood shingles. The roof is side gable clad in asphalt-shingles with a modillion cornice. The cornice forms closed gables on the side elevations. The closed gables are clad in hexagonal-cut, wood shingles and feature paired, 12/1, wood, double-hung sash windows.

- This is a one-story garage designed in the Late 19th and Early 20Th Century American Movement style and constructed circa 1920. It incorporates a concrete block foundation and a wood frame structural system clad in vertical board. The garage door opening has been covered with plywood. The roof is hipped clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

West 31st Street

PROPERTY ADDRESS: **118 West 31st Street**
PROPERTY NAME: House, 118 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-0663
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1907. It incorporates a parged brick foundation and a wood frame structural system clad in vinyl siding. The south facade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; a wide frieze; and square, wood columns. There is a projecting pediment surmounting the porch's central entrance. There are two entrances on the façade that are comprised of single-leaf, wood doors with fan-shaped lights. The house features 1/1, metal, double-hung sash windows. The windows on the first story have been boarded. There are two, gable-roofed dormers clad in wood shingles on the façade. The west dormer features an 8/1, metal, double-hung sash window and exposed, wood rafters. The east dormer is missing a window. There is a two-story, projecting, squared block surmounted by a closed gable on the east elevation. There is a two-story, projecting, squared bay surmounted by a closed gable on the west elevation. The closed gables on the east and west elevations are clad in wood shingles and feature window openings. The roof is hip-cross-gable clad in asphalt shingles with a wide frieze. The house features a massive, interior, brick chimney with a corbelled cap on the east elevation.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **200 West 31st Street**
PROPERTY NAME: Apartment Building, 200 West 31st Street
OTHER NAME (S): Herman Court
CONSTRUCTION DATE: circa 1920
DHR NUMBER (S): 122-5087-0665
DESCRIPTION (S):
This is a four-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. The building occupies a U-shaped footprint on the property. It incorporates a parged brick foundation and a brick structural system clad in brick veneer. The building features individual and paired, 1/1, metal, double-hung sash windows with rowlock brick sills and soldier-course brick lintels. The primary entrance is centrally located on the first story of the building within a courtyard. There are metal fire escapes located on the east and west elevations. The roof is flat with a parapet coped in metal. The building features patterned brickwork and concrete coping at the roofline.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **201 West 31st Street**
PROPERTY NAME: House, 201 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1948
DHR NUMBER (S): 122-5087-0666
DESCRIPTION (S):
This is a one-story house designed in the Colonial Revival style and constructed in 1948. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; and paired, wood posts. The primary entrance is centrally located and is comprised of a single-leaf door with a wrought iron storm door. The house features 3/1, wood, double-hung sash window with storm windows. The roof is gable clad in asphalt shingles. The façade gable features a 3/1, wood, double-hung sash window.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system clad in corrugated metal. The shed features a single-leaf, metal, paneled door and a gable roof.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **205 West 31st Street**
PROPERTY NAME: House, 205 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1948
DHR NUMBER (S): 122-5087-0667

DESCRIPTION (S):
This is a one-story house designed in the Colonial Revival style and constructed in 1948. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, shed roof; and wrought iron posts. The primary entrance is centrally located and is comprised of a single-leaf, metal, paneled door with a storm door. The house features 1/1 and 3/1, wood, double-hung sash window with storm windows. The roof is side gable clad in asphalt shingles. There are louvered vents located in the roof apexes on the side elevations. The house features a central, interior, brick chimney with a corbelled cap and a metal chimney pot. There is a single-leaf door with a storm door surmounted by a shed roof overhang supported by brackets on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **207 West 31st Street**
PROPERTY NAME: Duplex, 207 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-0668
DESCRIPTION (S):
This is a two-story duplex designed in the Queen Anne style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in weatherboard. The north façade features a two-story porch with an asphalt-shingled, hipped roof. The first story porch has three bays and features squared, wood posts and a wood balustrade. The second story porch is two-bay and features square columns and balustrade. There are two entrances on the façade that are comprised of single-leaf doors with storm doors surmounted by transoms. There is a single-leaf, wood door with 6 lights and a storm door accessing the second story porch. The duplex features 2/2, wood, double-hung sash windows with storm windows. The roof is cross-gable clad in asphalt shingles. The façade gable is clad in wood shingles and features a paired window opening. One of the openings has been filled with a wood, louvered vent, and the other opening has a casement window. The duplex features an interior, brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **208 West 31st Street**
PROPERTY NAME: House, 208 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1900
DHR NUMBER (S): 122-5087-0669
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1900. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; square columns; and a wood balustrade. The primary entrance is comprised of a single-leaf, metal, 6-panel door surmounted by a transom. The house features Queen Anne and 1/1, wood, double-hung sash windows with storm windows. There is a one-story, projecting canted

by surmounted by an asphalt-shingled, hipped roof on the east end of the second story façade. The roof is cross-gable clad in asbestos shingles with a cornice. The façade gable is closed. The house features an interior, parged brick chimney on the east elevation. There are closed gables on the east and west elevations.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **211 West 31st Street**
PROPERTY NAME: Apartment Building, 211 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1971
DHR NUMBER (S): 122-5087-0670
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1971. The building is oriented to the west. It incorporates a concrete block foundation and wood frame structural system clad common bond brick veneer. The building features a centrally located, single-leaf, metal, paneled door on the west facade. The building features individual and paired, 6/6, wood, double-hung sash windows with rowlock brick sills. Some of the windows on the first story of the west facade have been boarded. The north elevation features metal, sliding windows with rowlock brick sills. Air conditioning units punctuate the west elevation. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **212 West 31st Street**
PROPERTY NAME: House, 212 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-0671
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1921. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; battered, wood piers; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, 6-panel door with two lights and a wrought iron storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a hip-roofed dormer clad in asbestos shingles on the façade. The dormer features a paired, wood, window opening with one boarded opening. The roof is hipped clad in asphalt shingles with wide eaves.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system clad in aluminum siding. The roof is catslide clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **213 West 31st Street**

PROPERTY NAME: Apartment Buildings, 213-215 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1986
DHR NUMBER (S): 122-5087-0672
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1986. The building is oriented to the west. It incorporates a concrete block foundation and wood frame structural system clad common bond brick veneer. The building features three, centrally located, single-leaf, metal, paneled doors on the west facade. The building features metal, sliding windows with rowlock brick sills. The west façade and east elevation feature metal, sliding windows with rowlock brick sills. The roof is side gable clad in asphalt shingles.

- This is a two-story apartment building designed in the Modern Movement style and constructed in 1986. The building is oriented to the east. It incorporates a concrete block foundation and wood frame structural system clad common bond brick veneer. The building features three, centrally located, single-leaf, metal, paneled doors on the east facade. The building features metal, sliding windows with rowlock brick sills. The east façade and west elevation feature metal, sliding windows with rowlock brick sills. The roof is side gable clad in asphalt shingles.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **216 West 31st Street**
PROPERTY NAME: House, 216 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1900
DHR NUMBER (S): 122-5087-0673
DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1900. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; exposed, wood rafters; and wood posts. The primary entrance is comprised of a single-leaf, metal, paneled door with a metal storm door surmounted by a boarded transom and flanked by shutters. The house features 6/1 and 1/1, wood double-hung sash windows with storm windows. The windows on the east elevation feature non-functional shutters. There is a one-story, projecting, canted bay on the east end of the facade. The roof is gable clad in asphalt shingles with exposed wood rafter under the eaves. There are gabled wall dormers on the east and west elevations, which are clad in wood shingles and exhibit, paired, window openings. The facade gable features paired, 1/1, wood, double-hung sash windows flanked by non-functional shutters.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **218 West 31st Street**
PROPERTY NAME: House, 218 West 31st Street
OTHER NAME (S):

CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-0674
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch incorporated under the main roof. The porch features clustered, battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The east end of the porch has been screened and features a single-leaf, screen door. The primary entrance is comprised of a single-leaf, wood, paneled, door with a storm door surmounted by a transom and flanked by sidelights. There is an oversized, false, hip-roofed dormer with a shed-roofed, second-story, enclosed porch on the façade above the first story porch. The second-story porch is two bays and features paired and battered, wood piers; a vinyl-clad balustrade. The second story porch has been screened. The house features individual and paired, 9/1, wood, double-hung sash windows with storm windows. There is a hip-roofed dormer on the façade that features paired, 9/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles with exposed outriggers at the gable ends.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **224 West 31st Street**
PROPERTY NAME: House, 224 West 31st Street
OTHER NAME (S): Duplex, 224 West 31st Street
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-0675
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1907. It incorporates a brick foundation and parged, wood frame structural system. The south façade features a one-story, four-bay porch with an asphalt-shingled, hipped roof; individual and paired, wood, Tuscan columns; and a wood balustrade. There are two entrances on the façade and the house has been converted into a duplex. The west entrance is comprised of a single-leaf, wood door with a storm door. The other entrance was a double-leaf door that has been replaced with two, single-leaf doors. The house features metal, sliding windows. There is a two-story, projecting, squared bay on the east end of the façade. There is a hip-roofed dormer on the façade that features paired, wood, 4-light, casement windows. The roof is hipped clad in asphalt shingles with flared eaves. There is a single, carved, wood bracket on the southeast corner of the house under the eave. There is a one-story, side-gable-roofed addition appended to the east elevation. The addition is incorporates a parged foundation and a wood frame structural system clad in vinyl siding. There is a one-story ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **225 West 31st Street**
PROPERTY NAME: Apartment Building, 225 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1963

DHR NUMBER (S): 122-5087-0676
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1963. It incorporates a concrete block foundation and wood frame structural system clad in common bond brick veneer. The north façade features a one-story, one-bay porch with a flat, metal roof; and wrought iron posts and balustrade. The primary entrance is a single-leaf, metal, paneled door with nine lights. The windows have been boarded and exhibit rowlock brick sills. The roof is hipped clad in asphalt shingles with wide eaves.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **227 West 31st Street**
PROPERTY NAME: Garage, 227 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: circa 1930
DHR NUMBER (S): 122-5087-0677
DESCRIPTION (S):
This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1930. It incorporates a concrete slab foundation and wood frame structural system clad in asbestos siding. The north façade features a wood, paneled, roll-up door. A metal, chain-linked, double-leaf gate has been applied over the garage entrance. There is a single-leaf entrance on the west elevation. The roof is gable clad in asphalt shingles. The house associated with this garage has been demolished.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **232 West 31st Street**
PROPERTY NAME: House, 232 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-0678
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1907. It incorporates a brick foundation and a wood frame structural system clad in weatherboard. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and turned balusters. The primary entrance is comprised of a single-leaf, metal door surmounted by a boarded transom. The house features 1/1, wood double-hung sash windows with storm windows. Some windows on the second story have been boarded. There is a one-story, projecting, canted bay surmounted by a closed gable on the west end of the second story façade. The closed gable is clad in fishscale-cut wood shingles and features a boarded window opening. There is a two-story, projecting, canted bay surmounted by a closed gable on the east elevation. The closed gable is clad in fishscale-cut wood shingles and features a boarded window opening. There is a gable-roofed dormer on the façade that is surmounted by a closed gable and features a boarded window opening. There is a gable-roofed dormer on the east elevation that features paired, Queen Anne, wood, double-hung windows surmounted by a closed gable clad in fishscale-cut wood shingles. There is a closed

gable on the west elevation. The roof is hipped-cross-gable clad in slate shingles with a wide frieze. The house features interior, brick chimneys with corbelled caps on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **234 West 31st Street**
PROPERTY NAME: House, 234 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0679
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a wide frieze; wood, Tuscan columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a boarded transom. The house features metal, sliding windows. The roof is gable clad in asphalt shingles with a boxed cornice. The closed façade gable features a 1/1, wood, double-hung sash window with a storm window. There is a hip-roofed dormer clad in wood shingles on the west elevation. The house features two, interior, brick chimneys with corbelled caps on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **236 West 31st Street**
PROPERTY NAME: House, 236 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-0680
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1907. It incorporates a parged brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, wraparound porch with an asphalt-shingled, shed roof; and plain, wood posts and balustrade. There is a shed roof overhang supported by a wood, turned post on the east elevation forming the wraparound porch. The primary entrance is comprised of a single-leaf, metal door with an oval light. The house features replacement, 1/1, metal, double-hung sash windows. The roof is cross-gable clad in asphalt shingles with a boxed cornice and returns on the facade. The façade gable features a louvered vent. There is a two-story, projecting, squared block on the east elevation that is surmounted by a gable.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **237 West 31st Street**
PROPERTY NAME: House, 237 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906

DHR NUMBER (S): 122-5087-0681
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1906. It incorporates a brick foundation and a wood frame structural system clad in weatherboard. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and a plain, wood balustrade. There are two entrances on the façade that are comprised of single-leaf doors with storm doors. The house features 1/1, wood, double-hung sash windows with storm windows. There is a one-story, projecting, squared bay on the east end of the second story façade. A closed gable surmounts the second story façade. The closed gable is clad in wood shingles and features a Palladian window of a 1/1, double-hung sash window flanked by smaller, 1/1, double-hung sash windows with articulated cornices. There is a two-story, projecting, squared bay surmounted by a closed gable on the west elevation. The closed gable is clad in wood shingles and features a window opening. There is a two-story, projecting, canted bay surmounted by a closed gable on the east elevation. The closed gable is clad in wood shingles and features a double-hung sash window opening. The roof is cross-gable clad in asphalt shingles with a boxed cornice and a frieze. The house features a central, interior, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **240 West 31st Street**
PROPERTY NAME: House, 240 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-0682
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1905. It incorporates a 7-course, American bond brick foundation and structural system. The south façade is clad in common bond brick veneer and features two, concrete beltcourses. The beltcourses are located above the first story windows and below the roof entablature on the second story. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; individual and paired, wood, Tuscan columns resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a storm door surmounted by a transom and flanked by sidelights. The house features 1/1, metal, double-hung sash windows with stone sills. The windows on the side elevations feature 2-course, brick jack arches. There is a two-story, projecting, canted bay surmounted by a closed gable on the west end of the façade. The closed gable is clad in vinyl siding and features a Palladian window of a 1/1, wood, double-hung sash window with a rounded arch upper sash flanked by fixed, wood windows. There is a closed gable on the east elevation that features a 1/1, wood, double-hung sash window surmounted by a jack arch. The roof is hipped-cross-gable clad in asphalt shingles with a wide frieze. The house features two, interior, brick chimneys with a corbelled caps on the west elevation. There is a one-story porch appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **241 West 31st Street**

PROPERTY NAME: House, 241 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0683
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1906. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a boarded transom. The house features 1/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable features a 1/1, double-hung sash window. There is a two-story, projecting, squared bay surmounted by a closed gable on the east elevation. There is a gable-roofed dormer on the façade that features a 1/1, double-hung sash window and is surmounted by a closed gable. There is a gable-roofed dormer on the west elevation that features a double-hung sash window and cornice returns. The roof is hipped-cross-gable clad in asphalt shingles. The house features two, interior, brick chimneys with a corbelled caps on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **242 West 31st Street**
PROPERTY NAME: House, 242 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1913
DHR NUMBER (S): 122-5087-0684
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1913. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; and wood posts and balustrade. The primary entrance is boarded and surmounted by a boarded transom. The house features 6/6, wood, double-hung sash windows with storm windows. The first story windows have been boarded. There is a hip-roofed dormer on the façade. There is a closed intersecting gable on the east elevation. The roof is hipped clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **244 West 31st Street**
PROPERTY NAME: House, 244 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0685
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding.

The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door. The house features 1/1, metal, double-hung sash windows flanked by non-functional shutters. There is a two-story, projecting, canted bay surmounted by a closed gable on the east elevation. The roof is gable clad in asphalt shingles with a boxed cornice and returns on the façade.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1970. It incorporates a wood frame structural system clad in vinyl siding. The shed features a single-leaf, metal, paneled door; and 6/6 and 8/8, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **245 West 31st Street**
PROPERTY NAME: House, 245 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1908
DHR NUMBER (S): 122-5087-0686
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1908. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; a dentiled cornice; a wide frieze; and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal, 6-panel door surmounted by a boarded transom. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable features a 1/1, wood, double-hung sash window. The house features 1/1, 2/2, and 6/6, wood, double-hung sash windows with storm windows. The roof is hipped-cross-gable clad in asphalt shingles. There is an intersecting gable on the west elevation. The west elevation features a casement, wood window and a single-leaf door. There is a two-story, projecting, canted bay surmounted by a closed gable on the east elevation. The house features two interior, brick chimneys on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **307 West 31st Street**
PROPERTY NAME: House, 307 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1993
DHR NUMBER (S): 122-5087-0687
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1993. It is designed to resemble a Queen Anne-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The north façade features a one-story, four-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and a wrought iron balustrade. The primary entrance

is comprised of a single-leaf, metal door with a wrought iron storm door. The house features individual and paired, 6/6, metal double-hung sash windows. The roof is gable clad in asphalt shingles. The façade gable is clad in fishscale-cut, vinyl siding and features an octagonal-shaped, louvered vent.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1995. It incorporates a wood frame structural system clad in vinyl siding. The roof is gable clad in asphalt shingles.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **308 West 31st Street**
PROPERTY NAME: Apartment Building, 308 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1987
DHR NUMBER (S): 122-5087-0688
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1987. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system. The south façade and east elevation are clad in common bond brick veneer and the west elevation is clad in vinyl siding. The building features six entrances on the south façade. There are two entrances located on the east end and four entrances on the west end. The entrances are comprised of single-leaf, metal, paneled doors with storm doors. Classical surrounds frame the east and west door groupings. The surrounds feature pilasters and broken pediments. The building features 1/1, metal, double-hung sash windows. Non-functional shutters flank some of the facade windows. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **311 West 31st Street**
PROPERTY NAME: House, 311 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1913
DHR NUMBER (S): 122-5087-0689
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1913. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; a wide frieze; plain, wood posts; and wood balusters exhibiting a floral motif cut-out. The primary entrance is comprised of a single-leaf door with a light and a storm door surmounted by transom and flanked by 4-light sidelights with panels. There is a two-story, projecting, canted bay on the east end of the façade. The house features Queen Anne, wood, double-hung sash windows with storm windows. There is an oriel with a hipped roof that features paired, Queen Anne, wood, double-hung sash windows on the west elevation. The roof is gable clad in asphalt shingles with a boxed cornice. The façade gable is closed and features paired, 1/1, wood, double-hung sash windows. The pent roof that forms the closed gable on the north façade is clad in slate shingles. There are intersecting, closed gables on

the east and west elevations that feature double-hung sash windows. The house features an interior, brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **312 West 31st Street**
PROPERTY NAME: House, 312 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-0690
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Craftsman style and constructed in 1917. The house exhibits Colonial Revival characteristics. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch incorporated under the main roof. The porch features wood, Tuscan columns and turned balusters. The primary entrance is comprised of a single-leaf, wood, paneled door with a wrought iron storm door surmounted by a 6-light transom. There is a one-story, projecting, squared bay on the west end of the south facade that features a fixed, wood window surmounted by a 10-light, clerestory window. There is an oversized, gable-roofed dormer on the south façade that features tripartite, 4/1, wood, double-hung sash windows with storm windows surmounted by a closed gable. The house features 4/1, wood, double-hung sash windows with storm windows. The east façade features a single-leaf door and two, fixed wood windows. The west façade features a tripartite window. The east and west elevation gables feature fixed, wood windows. The roof is side gable clad in asphalt shingles. There is an asphalt-shingled, pent roof with cornice between the first and second stories on the side elevations. The house features an interior, parged brick chimney with a corbelled cap on the west elevation.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1980. It incorporates a wood frame structural system clad in vertical board. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **313 West 31st Street**
PROPERTY NAME: House, 313 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1985
DHR NUMBER (S): 122-5087-0691
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1985. It incorporates a concrete block foundation and a wood frame structural system clad in vinyl siding. The north facade features a stoop with a plain, wood balustrade and concrete stairs. The primary entrance is comprised of a single-leaf, metal, 6-paneled door with a storm door. The house features paired, 1/1, metal, double-hung sash windows. The façade gable features a 9-light, octagonal-shaped, metal window. The roof is gable clad in asphalt shingles.

NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **315 West 31st Street**
PROPERTY NAME: House, 315 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-0692
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1914. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The west end of the north façade features a two-story, projecting, squared block surmounted by a closed gable. The closed gable is clad in fishscale-cut vinyl siding and features a fixed, stained glass, wood window. The north façade features a one-story, two-bay porch that wraps around the projecting block on the east end. The porch features an asphalt-singled, hipped roof; wood, turned posts; and turned balusters. The primary entrance is comprised of a single-leaf door surmounted by a transom. The house features 1/1, vinyl, double-hung sash windows. The roof is hipped clad in asphalt shingles. The house features an interior, brick chimney with a corbelled cap on the west elevation. There is a one-story porch appended to the south façade.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **316 West 31st Street**
PROPERTY NAME: House, 316 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0693
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The west end of the south façade features a two-story, projecting, squared block surmounted by a closed gable. The closed gable features a 9/1, wood, double-hung sash window. The south façade features a one-story, three-bay porch that wraps around the projecting block on the east end. The porch features an asphalt-shingled, hipped roof; wood, Tuscan columns resting on brick pedestals; and turned balusters. The primary entrance is comprised of a double-leaf, wood, paneled door. The house features 6/1, 9/1, and 12/1, wood, double-hung sash windows; and diamond-shaped, fixed, wood windows. There is a one-story, projecting, canted bay on the first story of the two-story, projecting block on the facade. There is a two-story, projecting, squared block surmounted by a closed gable on the east elevation. The roof is hipped-cross-gable clad in asphalt shingles. There is an intersecting gable on the west elevation. The house features a central, interior, brick chimney and an interior, brick chimney with a corbelled cap on the west elevation. There is a one-story, incorporated porch on the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **317 West 31st Street**

PROPERTY NAME: House, 317 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-0694
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1914. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The west end of the north façade features a two-story, projecting, squared block surmounted by a closed gable. The closed gable features a fixed, wood window. The north façade features a one-story, two-bay porch that wraps around the projecting block on the east end. The porch features an asphalt-shingled, hipped roof; wood, turned posts; and turned balusters. The primary entrance is comprised of a single-leaf door. The house features 1/1, metal, double-hung sash windows. The roof is hipped clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **319 West 31st Street**
PROPERTY NAME: House, 319 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0695
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in weatherboard. The north façade features a one-story, two-story porch incorporated under the main roof. The porch features wood piers resting on brick pedestals; a plain, wood balustrade; and exposed, wood rafters under the eaves. The primary entrance is comprised of a single-leaf, wood, paneled door surmounted by a 6-light transom and flanked by boarded sidelights. The house features individual and tripartite, 9/1, wood, double-hung sash windows with storm windows. There is an oversized, hip-roofed dormer on the north façade that shelters a second story porch. The second story porch features individual and paired, wood posts; and exposed, wood rafters under the eaves. There is a single-leaf, wood door with nine lights and a storm door accessing the second story porch. The roof is side gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **321 West 31st Street**
PROPERTY NAME: House, 321 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0696
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-

story porch incorporated under the main roof. The porch features battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, 6-panel door. The house features 6/6, metal, double-hung sash windows. There is an oversized, shed-roofed dormer on the north façade. The roof is side gable clad in asphalt shingles with wide eaves. The house features an interior, brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **322 West 31st Street**
PROPERTY NAME: House, 322 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1900
DHR NUMBER (S): 122-5087-0697
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1900. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; wrought iron posts and balustrade; and a metal awning. The primary entrance is comprised of a single-leaf door with a storm door. The house features 1/1, vinyl, double-hung sash windows. The first story façade windows are tripartite and flanked by non-functional shutters. The roof is gable clad in asphalt shingles. The façade gable features cornice returns and a 1/1, wood, double-hung sash window with a storm window. The house features two, interior, brick chimneys with corbelled caps on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **323 West 31st Street**
PROPERTY NAME: House, 323 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1995
DHR NUMBER (S): 122-5087-0698
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1995. It is designed to resemble a Colonial Revival-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; a central entrance surmounted by a gable clad in fishscale-cut vinyl siding; and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf door with a storm door. The house features individual, 6/6, metal double-hung sash windows. The roof is gable clad in asphalt shingles. The façade gable is clad in fishscale-cut, vinyl siding.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **325 West 31st Street**
PROPERTY NAME: Apartment Building, 325 West 31st Street

OTHER NAME (S): Wentworth Apartments/Park Place Landing
CONSTRUCTION DATE: circa 1915
DHR NUMBER (S): 122-5087-0699
DESCRIPTION (S):
This is a three-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1915. It incorporates a 6-course, American bond brick foundation and 6-course, American bond brick structural system. The façade is clad in common bond brick veneer. The north façade features two, three-story, one-bay porches flanking a central entrance sheltered under a common shed roof. The porches feature brick piers resting on tall brick pedestals; plain, wood posts; and plain, wood balustrades. Chamfered posts have been added to each porch for additional support. The primary entrance is centrally located and comprised of a single-leaf door. There are single-leaf doors surmounted by transoms accessing each of the porches. The building features 1/1, metal, double-hung sash windows with rowlock brick sills. The roof is flat with a parapet. The building features a corbelled cornice and an interior, brick chimney embedded into the west elevation wall. The building was rehabilitated in 2000.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **401 West 31st Street**
PROPERTY NAME: House, 401 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-0700
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1907. It incorporates a brick foundation clad in rusticated stone veneer and a wood frame structural system clad in aluminum siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; brick piers; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door. There is a one-story, projecting, squared block surmounted by a closed gable on the east end of the second story façade. The house features 1/1, metal, double-hung sash windows. The roof is hipped clad in asphalt shingles. The house features hip-roofed dormers on the façade and east and west elevations.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **402 West 31st Street**
PROPERTY NAME: Apartment Building, 402 West 31st Street
OTHER NAME (S): Detroit Apartments
CONSTRUCTION DATE: circa 1915
DHR NUMBER (S): 122-5087-0701
DESCRIPTION (S):
This is a three-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1915. It incorporates a brick foundation and a brick structural system. The façade is clad in common bond brick veneer. The south façade features two, three-story, one-bay porches flanking a

central entrance sheltered under a common hipped roof. The porches feature brick piers resting on brick pedestals; and wood balustrades. The porch piers have solider and header course brick and limestone stylized capitals. The primary entrance is centrally located and comprised of a boarded single-leaf door within a projecting entrance block. There are single-leaf doors accessing each of the porches. The building features 1/1, metal, double-hung sash windows with rowlock brick sills. Many of the windows are missing or boarded. The roof is flat with a stepped parapet on the side elevations that is coped in a rowlock brick course. There is a corbelled cornice on the façade.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **403 West 31st Street**
PROPERTY NAME: House, 403 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0702
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1906. It incorporates a brick foundation clad in rusticated stone veneer and a wood frame structural system clad in aluminum siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; wrought iron posts and balustrade; and a metal awning. The primary entrance is comprised of a single-leaf, metal, 6-panel door. There is a one-story, hip-roofed, projecting, squared block on the east end of the second story façade. The house features 1/1, metal, double-hung sash windows. The roof is hipped clad in asphalt shingles. The house features hip-roofed dormers on the façade and east and west elevations. There is a one-story porch with wrought iron posts appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **406 West 31st Street**
PROPERTY NAME: House, 406 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1900
DHR NUMBER (S): 122-5087-0703
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1900. It incorporates a brick foundation and a wood frame structural system. The south façade is clad in vinyl siding and the side elevations are clad in asbestos siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; plain, wood posts; and turned balusters. The primary entrance is comprised of a single-leaf, wood, paneled door with a fan-shaped light surmounted by a transom. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable features a 1/1, wood, double-hung sash window with a storm window. The house features 1/1, metal, double-hung sash windows. The roof is hipped clad in asphalt shingles with wide eaves. There is a closed, intersecting gable on the west elevation. There is a hip-roofed dormer on the east elevation. The house features an interior, parged brick chimney with a

corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **408 West 31st Street**
PROPERTY NAME: House, 408 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0704
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in plywood. The south façade features a two-story, two-bay porch with a shed roof. The first-story porch features a false, asphalt-shingled, hipped roof; and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a wrought iron storm door flanked by 3-light sidelights. The house features 6/1, wood, double-hung sash windows with storm windows. The second story façade features an enclosed porch that has been clad in plywood and is punctuated by a 16-light, fixed, metal window. The roof is side gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **409 West 31st Street**
PROPERTY NAME: House, 409 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-0705
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1921. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; battered, wood piers; exposed, wood rafters under the eaves; a plain, wood balustrade; and a metal awning. The primary entrance is comprised of a single-leaf, wood door, with multiple lights and a storm door flanked by multiple light sidelights. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a single-leaf, metal, paneled door on the east elevation. There is a hip-roofed dormer on the north façade that features paired, 1/1, wood, double-hung sash windows and exposed rafters under the eaves. The roof is hipped clad in slate shingles and features exposed, wood rafters under the eaves. The house features an interior, brick chimney on the west elevation. There is a one-story ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **410 West 31st Street**
PROPERTY NAME: House, 410 West 31st Street
OTHER NAME (S): Duplex, 410 West 31st Street
CONSTRUCTION DATE: 1920

DHR NUMBER (S): 122-5087-0706
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a brick foundation and 7-course, American bond, brick structural system. The south façade is clad in common bond brick veneer. The south facade features a stoop with a plain, wood balustrade and parged brick stairs. The original exterior door has been removed and two doors have been installed within the vestibule. The entrances are comprised of a single-leaf, metal, 6-panel doors surmounted by boarded transoms. The house features individual and paired, 1/1, metal, double-hung sash windows with rowlock brick sills. The roof is flat with a corbelled cornice and a parapet coped in a rowlock brick course. This house has been converted into a duplex.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **412 West 31st Street**
PROPERTY NAME: House, 412 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-0707
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1907. It incorporates a parged brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and turned balusters. The primary entrance is comprised of a single-leaf, wood, paneled door with two, square-shaped lights and a storm door. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable features an octagonal-shaped, vinyl, louvered vent. The house features 6/6, metal, double-hung sash windows. The roof is hipped clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **415 West 31st Street**
PROPERTY NAME: House, 415 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0708
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system. The first story is clad in vinyl siding and the second story is clad in wood shingles. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; brick piers resting on brick pedestals; turned balusters. The primary entrance is comprised of a single-leaf, metal, 6-panel door surmounted by a transom. There is a two-story, projecting, squared block surmounted by a closed gable on the east end of the façade. The closed gable is clad in wood shingles and features a double-hung sash window. The house features 1/1, metal, double-hung sash windows. The first story façade features an

oversized, fixed, vinyl window surmounted by a fixed, clerestory window. There is a tripartite window and a single-leaf door on the east elevation. The roof is hipped-cross-gable clad in asphalt shingles. There is a one-story, projecting, canted bay surmounted by a closed gable on the second story of the east elevation. The canted bay features windows on the canted walls and a double-hung sash window in the closed gable.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **417 West 31st Street**
PROPERTY NAME: House, 417 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1911
DHR NUMBER (S): 122-5087-0709
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1911. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a boxed cornice; a wide frieze; wood, Tuscan columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a fan-shaped light surmounted by a transom. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable is clad in asbestos shingles and features a 1/1, wood, double-hung sash window. The house features 1/1, metal, double-hung sash windows. The roof is hipped clad in asbestos shingles. There is an intersecting gable on the west elevation. The house features two, interior, brick chimneys on the east elevation. The north chimney has a corbelled cap and the south chimney has a parged cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **418 West 31st Street**
PROPERTY NAME: House, 418 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0710
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a boxed cornice; a wide frieze; wood, Tuscan columns; and a plain, wood balustrade. The primary entrance is comprised of a double-leaf door with storm doors surmounted by a transom. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable is clad in wood shingles and features a 1/1, wood, double-hung sash window. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is hipped-cross-gable clad in asphalt shingles. There is an intersecting gable on the west elevation. There is a two-story, projecting, squared bay surmounted by a closed gable on the east elevation. The gables on the side elevations are clad in wood shingles and feature double-hung sash windows. The house features an interior, brick chimney

on the east elevation. There is a one-story ell appended to the north elevation. The ell features a single-leaf door with a storm door accessed by wood stairs on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **420 West 31st Street**
PROPERTY NAME: Apartment Building, 420 West 31st Street
OTHER NAME (S): Colonial Park Square
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0711
DESCRIPTION (S):
This is a two-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a brick foundation and 6-course, American bond brick structural system. The façade is clad in common bond brick veneer. The south façade features two, two-story, one-bay porches flanking a central entrance. The porches feature asphalt-shingled, hipped roofs; brick piers; and plain, wood balustrades. The primary entrance is centrally located and comprised of a single-leaf door surmounted by a soldier and header course jack arch. There are single-leaf doors accessing each of the porches. The building features 1/1, metal, double-hung sash windows with rowlock brick sills. The roof is flat with a stepped parapet on the side elevations that is coped in a rowlock brick course. The building features a corbelled cornice and four, interior, brick chimneys with corbelled caps embedded into the east and west elevation walls. There is a two-story, five-bay porch appended to the north elevation. The porch features a shed roof and plain, wood posts and balustrade. There are single-leaf doors accessing the porch and a wood staircase.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **421 West 31st Street**
PROPERTY NAME: Apartment Building, 421 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: circa 1928
DHR NUMBER (S): 122-5087-0712
DESCRIPTION (S):
This is a three-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1928. It incorporates a brick foundation and brick structural system. The north façade features two, three-story, one-bay porches flanking a central entrance sheltered under a common hipped roof. The porches feature brick piers; and plain, wood balustrades. The primary entrance is centrally located and comprised of a single-leaf door. There are single-leaf doors accessing each of the porches. The building features individual and paired, 1/1, metal, double-hung sash windows with rowlock brick sills. There are fixed, metal windows on the second and third stories of the projecting, central entrance block. The roof is flat with a stepped parapet on the side elevation that is coped in a rowlock brick course. The façade features a corbelled cornice.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **429 West 31st Street**
PROPERTY NAME: Apartment Building, 429 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1986
DHR NUMBER (S): 122-5087-0713
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1986. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The north façade features four entrances. The entrances are comprised of single-leaf, metal, 6-paneled doors. There is a wood stair accessing the second story entrances. The building features paired, 6/6, metal, double-hung sash windows flanked by non-functional shutters. The roof is side gable clad in asphalt shingles. The wide eave on the façade shelters the wood stair.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **431 West 31st Street**
PROPERTY NAME: Apartment Building, 431 West 31st Street
OTHER NAME (S): Touraine Apartments
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-0714
DESCRIPTION (S):
This is a three-story apartment building designed in the Colonial Revival style and constructed in 1915. It incorporates a brick foundation and brick structural system. The building features a limestone watertable. The north façade features two, symmetrical pavilions that project slightly from the façade wall and feature brick quoins. Each of the pavilions features single-leaf, metal, paneled doors surmounted by cloth awnings and limestone markers inscribed with the word "TOURAINE." The building features individual and paired, 1/1, wood, double-hung sash windows with storm windows; and limestone sills and lintels. The windows on the pavilions have been replaced and feature 1/1, metal, double-hung windows with vinyl infill. There is a wood cornice applied to the façade and west elevation of the building. The west elevation features a two-story pavilion with brick quoins and an entrance that is identical to those on the north façade. The roof is flat with a stepped parapet on the east and south elevations that is coped in a rowlock brick course.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **436 West 31st Street**
PROPERTY NAME: Park Place Baptist Church
OTHER NAME (S):
CONSTRUCTION DATE: 1913
ARCHITECT: George Washington Kramer (church)
Rudolph, Cooke and Van Leeuwen (religious education facility)
DHR NUMBER (S): 122-5087-0715
DESCRIPTION (S):

This is a two-story church designed in the Classical Revival style and constructed in 1913. It incorporates a brick foundation and a brick structural system clad in stone veneer. The church features a limestone watertable and beltcourse. The church has a cross-plan with projecting gable blocks on the east, west, north and south elevations. The south façade features an oversized, recessed entrance comprised of a wood double-leaf door flanked by single-leaf doors surmounted by a large, rounded-arch, stained glass window. There is a four-story tower at the southeast corner with a single-leaf wood door on the ground level on the south façade. The tower features brick buttresses at the corners and round-arched lanterns with paired rounded-arched louvered openings. The west elevation features a large, rounded arch stained glass window with a limestone surround. The gable ends feature parapets. The roof is cross-gable clad in slate shingles. Buildings obscure the north end of the west elevation, the east elevation and north elevation.

- There is a three-story religious education facility on the east elevation of the church constructed in 1927 in the same style as the church. It has a rectangular plan with a complex roofline. It is concrete block construction clad in brick veneer. The south elevation features a gable roof with rounded arch window on the second story and square windows on the first story. The windows are 1/1, metal, double-hung sash. The east elevation features intersecting hipped roofs on the north and south ends. The north end roof surmounts a projecting block. There is an exterior, brick octagonal chimney on the east elevation. The roof is complex clad in asphalt shingles.
- This is a five-story educational facility designed in the Modern Movement style and constructed in 1958. It incorporates a concrete block foundation and a concrete block structural system clad in brick veneer. The primary entrance is centrally located on the north façade. The entrance is comprised of a single-leaf door surmounted by a brick round arch. There are two single-leaf entrances on the north façade. The window openings on the first story have been boarded. The building features paired, 1/1, metal, double-hung sash windows with limestone sills. The roof is flat with a parapet coped in a rowlock brick course. There is a gable-roofed, brick pavilion centrally located on the façade with a parapet. The building features a corbelled brick cornice on the north façade.
- This is a three-story religious facility designed in the Modern Movement style and constructed in 1958. It incorporates a concrete slab foundation and a concrete block structural system clad in brick veneer. The building features a limestone beltcourse. The primary entrance is located on the south end of the west façade and is comprised of a double-leaf door in a round arch door surround. The building features 2/2, metal, double-hung sash windows; and metal, awning windows. The roof is flat with a parapet coped in a rowlock brick course. This building wraps the northwest corner of the church.

CONTRIBUTING (2 - buildings)
NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **701 West 31st Street**
PROPERTY NAME: House, 701 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0716

DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features square, wood columns and a wrought iron balustrade. The primary entrance is comprised of a single-leaf wood door with a wrought iron storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is an oversized, shed-roofed dormer that shelters a second story porch on the north façade. The second story porch has been screened and features wood posts and a vinyl-clad balustrade. There is a single-leaf door accessing the second story porch. There is a one-story, projecting, squared bay on the east elevation that features a shed roof and paired, 1/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles with exposed outriggers and brackets under the rakes. There are louvered vents in the gable apexes on the east and west elevations. The house features an interior, brick chimney with a metal cap on the east elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system clad in vinyl siding. The garage feature two, roll-up garage doors. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **702 West 31st Street**
PROPERTY NAME: House, 702 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0717
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1918. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, shed roof; paneled, wood posts; and a wood balustrade with a diamond motif. The primary entrance is comprised of a single-leaf door with a wrought iron storm door surmounted by a boarded transom and flanked by 6-light sidelights. The house features individual, paired, and tripartite, 9/1, wood, double-hung sash windows with storm windows flanked by non-functional shutters. There is a shed-roofed dormer on the south façade that features tripartite, 1/1, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles. The house features an interior, parged brick chimney with a corbelled cap on the east elevation at the north corner. There is a one-story garage addition appended to the east elevation. The garage addition features a concrete block foundation; a metal, paneled, roll-up door; and an asphalt-shingled, gabled roof. There are two entrances on the north elevation. The east door is comprised of a single-leaf door with a storm door sheltered by a shed-roofed overhang supported by wood posts. The west door is comprised of a single-leaf, metal, 6-panel door surmounted by a shed-roofed overhang. There is a one-story, gable-roofed ell appended to the west end of the north elevation. The ell features a single-leaf, metal, 6-panel door; and a 1/1, metal, double-hung sash window.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **706 West 31st Street**
PROPERTY NAME: House, 706 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1965
DHR NUMBER (S): 122-5087-0718
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1965. It incorporates a concrete block foundation and wood frame structural system. The south façade is clad in brick veneer and the side and rear elevations are clad in asbestos siding. The south façade features a stoop with a wrought iron balustrade; brick stairs; and a metal awning. The primary entrance is comprised of a single-leaf, metal door with a wrought iron storm door. The house features individual and paired, 6/6, metal, double-hung sash windows flanked by non-functional shutters. Bars have been applied over the windows on the side and rear elevations. The roof is side gable clad in asphalt shingles. There are metal, louvered vents at the roof apexes of the side elevations. There is a stoop on the north elevation that features a single-leaf door with a storm door surmounted by a metal awning.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1970. It incorporates a wood frame structural system clad in asbestos shingles. The garage features a metal, paneled, roll-up door; and a single-leaf, wood, paneled door with two lights surmounted by a shed-roofed overhang supported by brackets.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **708 West 31st Street**
PROPERTY NAME: House, 708 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0719
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The south façade features a one-story, two-bay porch with a shed roof extending from the main roof. The porch features battered, wood piers; and a wood balustrade. The primary entrance is comprised of a single-leaf, wood paneled door with a fan-shaped light and a storm door. The house features 1/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade window. There is an oversized, gable-roofed dormer on the façade. The dormer features an octagonal-shaped, louvered vent at the gable apex. The roof is side-gable clad in asphalt shingles with a raking cornice and wide eaves. The house features an interior, brick chimney on the east elevation. There is a one-story, projecting, squared, shed-roofed bay on the west elevation. There is a one-story, projecting, squared bay on the north elevation that is sheltered by an extended eave of the main roof.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1990. It incorporates a wood frame structural system clad in vinyl siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **710 West 31st Street**
PROPERTY NAME: House, 710 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0720
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with a shed roof extending from the main roof. The porch features wood, turned posts; and turned balusters. The primary entrance is comprised of a single-leaf, wood, paneled door with six lights. The house features 1/1, metal, double-hung sash windows. There is an oversized, gable-roofed dormer on the façade. The dormer features a louvered vent at the gable apex on the façade. The roof is cross-gable clad in asphalt shingles with a raking cornice. The house features an exterior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **712 West 31st Street**
PROPERTY NAME: House, 712 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1995
DHR NUMBER (S): 122-5087-0721
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1995. It is designed to resemble a Colonial Revival style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled; hipped roof; and wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal door with a metal storm door flanked by 3-light sidelights. The house features individual and paired, 1/1, metal, double-hung sash windows. The roof is cross-gable clad in asphalt shingles. The façade gable is closed and features an octagonal-shaped, louvered vent. There is an entrance comprised of double-leaf, 15-light, metal doors on the north elevation. There is also a wood deck on the north elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1995. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, paneled, roll-up door; and a single-leaf, metal, paneled, door with nine lights. The roof is gable clad in asphalt shingles.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **716 West 31st Street**
PROPERTY NAME: House, 716 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0722
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system. The façade is clad in weatherboard and the side elevations are clad in asbestos siding. The south façade features a one-story, two-bay porch with a shed roof extending from the main roof. The porch features square, wood posts; a wood balustrade; and exposed rafters under the eaves. The primary entrance is comprised of a single-leaf, wood paneled door with a storm door. The house features 1/1, metal, double-hung sash windows. There is an oversized, gable-roofed dormer on the façade. The dormer features a gable roof with exposed, wood rafters under the eaves and brackets under the rakes. The dormer is clad in asbestos shingles. The roof is side-gable clad in asphalt shingles with a raking cornice and exposed, wood rafters under the eaves. The house features an interior, brick chimney on the east elevation. There is a one-story, projecting, squared, shed-roofed bay clad in weatherboard on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **718 West 31st Street**
PROPERTY NAME: House, 718 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0723
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, shed roof; square, wood, columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood paneled door with a storm door. The house features 6/6, wood, double-hung sash windows with storm windows. The roof is Jerkinhead-gable clad in asphalt shingles with brackets under the rakes on the façade and wide eaves. There is a one-story, projecting, squared, shed-roofed bay on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **722 West 31st Street**
PROPERTY NAME: House, 722 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1995
DHR NUMBER (S): 122-5087-0724

DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1995. It is designed to resemble a Queen Anne style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The west end of the south façade features a one-story, four-bay porch that wraps around and extends the length of west elevation. The porch features an asphalt-shingled; hipped roof; and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal, 6-panel door that is flanked on the west by a 5-light sidelight. The house features individual and tripartite, 4/4 and 6/6, metal, double-hung sash windows. There is a two-story, projecting, squared block surmounted by a closed gable on the east end of the façade. The closed gable features a circular louvered vent. The roof is gable clad in asphalt shingles with a boxed cornice and a wide frieze. The façade gable is closed.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1995. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, paneled, roll-up door; and a single-leaf, metal, paneled door with nine lights. The roof is gable clad in asphalt shingles.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **726 West 31st Street**
PROPERTY NAME: House, 726 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0725
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, two-bay porch with an asphalt-shingled; shed roof; and wood posts and balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with four lights and a storm door. The house features individual and paired, 1/1, metal, double-hung sash windows. The roof is cross-gable clad in asphalt shingles. There are gables on the east and west elevations. The façade gable features a rectangular-shaped, louvered vent. There is a one-story, projecting, squared bay surmounted by a shed roof on the west elevation. There is a shed-roofed ell appended to the north elevation. There is a one-story, shed-roofed addition appended to the west end of the ell. The addition has been treated with stucco and features a single-leaf, metal, 6-panel door.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1995. It incorporates a wood frame structural system clad in vinyl siding. The shed features a single-leaf, metal, paneled door. The roof is gable clad in asphalt shingles with cornice returns.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **728 West 31st Street**
PROPERTY NAME: House, 728 West 31st Street

OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0726
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, two-bay porch with a shed roof extending from the main roof. The porch features plain, wood posts and balustrade; and a metal awning. The primary entrance is comprised of a single-leaf door. The house features individual and paired, 1/1, metal, double-hung sash windows. The roof is side-gable clad in asphalt shingles. There are oversized, gable-roofed dormers on the façade and north elevation. Metal awnings surmount the windows on the façade dormer. There is a one-story, projecting, squared bay surmounted by a shed roof on the west elevation. There is a one-story ell appended to the north elevation that is sheltered by extended eaves of the main roof. The ell features a single-leaf, metal, paneled door with nine lights and a storm door. The house features an interior brick chimney on the east elevation.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system clad in vinyl siding. The shed features metal, double-hung sash windows. The roof is gable clad in asphalt shingles with cornice returns.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **730 West 31st Street**
PROPERTY NAME: House, 730 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0727
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch incorporated under the main roof. The porch features square, wood columns and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a 12-light storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is an oversized, shed-roofed dormer that shelters an enclosed second story porch on the south façade. The second story porch is clad in vinyl siding and is punctuated by 1/1, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles with exposed outriggers and brackets under the rakes. There is a one-story, shed-roofed ell appended to the north elevation. The house features an interior, brick chimney with a corbelled cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **734 West 31st Street**
PROPERTY NAME: House, 734 West 31st Street
OTHER NAME (S):

CONSTRUCTION DATE: 1994
DHR NUMBER (S): 122-5087-0728
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1994. It is designed to resemble a Colonial Revival style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; and plain wood posts and balustrade. The primary entrance is centrally located and is comprised of a single-leaf, metal, paneled door flanked by a sidelight on the west. The house features 6/6, metal, double-hung sash windows. The roof is hipped clad in asphalt shingles. There is a hip-roofed dormer on the façade that features a 6/6, metal, double-hung sash window.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1994. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, paneled, roll-up garage door. The roof is side gable clad in asphalt shingles.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **739 West 31st Street/2810 Colley Avenue**
PROPERTY NAME: Abyssinia Baptist Church
OTHER NAME (S): Church, 739 West 31st Street
CONSTRUCTION DATE: 1976
DHR NUMBER (S): 122-5087-0729
DESCRIPTION (S):
This is a one-story church designed in the Modern Movement style and constructed in 1976. It is designed to resemble a Colonial Revival-style church. It incorporates a concrete block foundation and structural system clad in brick veneer. The church is comprised of a gable-roofed sanctuary with a projecting tower on the northwest corner. The west façade features a one-bay, gable-roofed portico supported by columns and accessed by brick stairs. The primary entrance is comprised of double-leaf doors. There is a glass block window located to the south of the primary entrance. There is a handicapped-ramp with a metal balustrade located on the north end of the façade. The west façade features a circular window opening in the gable. Soldier course bricks frame the window opening. The tower on the northwest corner features a brick base with a metal, octagonal steeple. The lantern features pointed arch, louvered vents. The building features an asphalt-shingled, gable roof. There is a one-story, projecting ell appended to the north elevation. The ell features glass block windows. There is a cross-gable-roofed addition appended to the southwest corner of the ell. The addition features a double-leaf door surmounted by a metal awning supported by metal posts. There is a circular window located at the gable apex of the addition. The roof of the addition is clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **740 West 31st Street**
PROPERTY NAME: House, 740 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1995

DHR NUMBER (S): 122-5087-0730
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1995. It is designed to resemble a Queen Anne style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, shed roof; and plain wood posts and balustrade. There is a gable surmounting the porch entrance on the east end. There is a two-story, projecting, squared bay surmounted by a closed gable on the west end of the façade. The closed gable features a fan-shaped, louvered vent. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a multiple-light transom and flanked by sidelights. The house features 9/9 and 6/6, metal, double-hung sash windows. There is an octagonal-shaped, metal window on the façade. The roof is gable clad in asphalt shingles with a shed roof on the north elevation. There is a one-story, gable-roofed addition appended to the north end of the west elevation. There is a one-story, gable-roofed garage appended to the north end of the east elevation. The garage features a metal, roll-up garage door.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **744 West 31st Street**
PROPERTY NAME: House, 744 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-0731
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The vinyl siding is hung vertically on the south façade. The south façade features a two-story porch with an asphalt-shingled, gable roof. The first-story porch features three screened bays; battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The second story porch features one bay; square, wood columns; and a vinyl-clad balustrade. The closed gable surmounting the porch is clad in vinyl siding and features a fan-shaped medallion, a boxed cornice and a raking cornice. The primary entrance is comprised of a single-leaf door. The house features 6/1, wood, double-hung sash windows with storm windows. The roof is gable clad in asphalt shingles with cornice returns on the side elevations. There is a shed-roofed ell appended to the north elevation.

- This is a one-story shed designed in the Late 19th and Early 20th Century American Movement and constructed circa 1920. It incorporates a wood frame structural system clad in asbestos siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **816 West 31st Street**
PROPERTY NAME: House, 816 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1937

DHR NUMBER (S): 122-5087-0732
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Colonial Revival style constructed in 1937. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, shed roof; wood, turned posts; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door. The house features individual and paired, 6/6, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows. There is an intersecting gable block on the southeast corner of the house. The roof is side gable clad in asphalt shingles. The house features a central, interior, brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **818 West 31st Street**
PROPERTY NAME: Apartment Building, 818 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1987
DHR NUMBER (S): 122-5087-0733
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1987. It incorporates a concrete block structural system clad in brick veneer and a wood frame structural system. The south façade is clad in brick veneer. The east and west elevations feature brick veneer plinths with vinyl siding above. The south façade features five entrances. The entrances are comprised of single-leaf, metal, 6-panel doors. There is a metal staircase accessing the entrances on the second story of the façade. The entrances and staircase are sheltered by a wide eave of the main roof. The building features 1/1, metal, double-hung sash windows with rowlock brick sills. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **824 West 31st Street**
PROPERTY NAME: House, 824 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1929
DHR NUMBER (S): 122-5087-0734
DESCRIPTION (S):
This is a one-and-one-half-story house designed in Tudor Revival style and constructed in 1929. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The south façade features a gable-roofed, projecting, entrance bay. The entrance bay features a single-leaf, half circle, wood, paneled door with a circular light. There is an intersecting, Jerkinhead gable on the east end of the facade. There is a one-story, enclosed porch incorporated under the flared eave of the intersecting gable roof on the northeast corner. The house features individual and paired, 6/6, wood, double-hung sash windows with storm windows. The roof is Jerkinhead-cross-gable clad in asphalt shingles with a boxed cornice. The house features an exterior, brick chimney on the south façade.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **832 West 31st Street**
PROPERTY NAME: House, 832 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0735
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay, screened porch with an asphalt-shingled, shed roof; battered, wood piers resting on brick pedestals; and a single-leaf, screen door entrance. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The roof is gable clad in asphalt shingles. There is a square, louvered vent at the gable apex on the façade. The house features an interior, brick chimney. There is a one-story, shed-roofed ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **900 West 31st Street**
PROPERTY NAME: House, 900 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1949
DHR NUMBER (S): 122-5087-0736
DESCRIPTION (S):
This is a one-story house designed in the Colonial Revival style and constructed in 1949. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, one-bay porch with an asphalt-shingled, gable roof; and wrought iron posts. The primary entrance is comprised of a single-leaf, metal, paneled door with a wrought iron storm door. The house features 6/6, metal, double-hung sash windows. Non-functional shutters flank the façade windows. There is a projecting, canted bay window on the east end of the south façade. The roof is side gable clad in asphalt shingles. There are squared, louvered vents at the gable apexes of the side elevation. The house features an interior, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **901 West 31st Street**
PROPERTY NAME: House, 901 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0737
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1920. It incorporates a parged brick foundation and a wood frame

structural system clad in vinyl siding. The north façade features a one-story, three-bay porch incorporated under the main roof. The porch features battered, wood posts; and a plain, wood balustrade. The primary entrance is centrally located and is comprised of a single-leaf door with a wrought iron storm door. The house features individual and paired, 6/6, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles with wide eaves. The house features a central, interior, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **904 West 31st Street**
PROPERTY NAME: House, 904 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1950
DHR NUMBER (S): 122-5087-0738
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Colonial Revival style and constructed in 1950. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features stoop with an asphalt-shingled, gable roof overhang; and wrought iron balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with two lights. The house features 6/6, wood, double-hung sash windows with storm windows flanked by non-functional shutters. The roof is side gable clad in asphalt shingles. The house features an interior, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **905 West 31st Street**
PROPERTY NAME: House, 905 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0739
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1919. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wrought iron posts and balustrade; and a metal awning. The primary entrance is comprised of a single-leaf door with a wrought iron storm door. The house features individual and paired, 6/6, wood, double-hung sash windows with storm windows. The first story façade windows are flanked by non-functional shutters and the second story facade windows are surmounted by metal awnings. The roof is gable clad in asphalt shingles. There is a fan-shaped window in the gable apex on the façade. The house features an interior, brick chimney.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1940. It incorporates a wood frame structural system clad in corrugated metal siding. The garage features double-leaf, metal, sliding doors. The roof is gable clad in corrugated metal.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **908 West 31st Street**
PROPERTY NAME: House, 908 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1950
DHR NUMBER (S): 122-5087-0740
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Colonial Revival style and constructed in 1950. It incorporates a concrete block foundation and a wood frame structural system clad in vinyl siding. The south façade features stoop with an asphalt-shingled, gable roof; a wrought iron balustrade; and a metal awning. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a storm door. The house features 1/1, metal, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows. The roof is side gable clad in asphalt shingles. The house features a central, interior, brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **912 West 31st Street**
PROPERTY NAME: House, 912 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1950
DHR NUMBER (S): 122-5087-0741
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Colonial Revival style and constructed in 1950. It incorporates a concrete block foundation and a wood frame structural system clad in vinyl siding. The south façade features stoop with an asphalt-shingled, gable roof; and wrought iron balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with two lights and a wrought iron storm door. The house features 1/1, metal, double-hung sash windows. Non-functional shutters flank the façade windows. The roof is side gable clad in asphalt shingles. The house features a central, interior, brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **916 West 31st Street**
PROPERTY NAME: House, 916 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1950
DHR NUMBER (S): 122-5087-0742
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Colonial Revival style and constructed in 1950. It incorporates a concrete block foundation and a wood frame structural system clad in vinyl siding. The south façade features stoop with an asphalt-shingled, gable roof overhang; and wood balustrade. The primary entrance is comprised of a single-leaf, metal, 6-panel door. The house features 1/1, metal, double-hung sash windows. Non-functional shutters flank the façade windows. The roof is side gable clad in asphalt shingles.

There are two gable-roofed dormers on the façade. The house features a central, interior, brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **920 West 31st Street**
PROPERTY NAME: House, 920 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1950
DHR NUMBER (S): 122-5087-0743
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Colonial Revival style and constructed in 1950. It incorporates a concrete block foundation and a wood frame structural system clad in aluminum siding. The south façade features a brick veneer plinth. The south façade features stoop with an asphalt-shingled, gable roof. The primary entrance is comprised of a single-leaf, wood, paneled door with three lights and a storm door. The house features individual and tripartite, 1/1, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles. The house features a central, interior, brick chimney. There is a one-story, shed-roofed ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **924 West 31st Street**
PROPERTY NAME: House, 924 West 31st Street
OTHER NAME (S):
CONSTRUCTION DATE: 1950
DHR NUMBER (S): 122-5087-0744
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Colonial Revival style and constructed in 1950. It incorporates a concrete block foundation and a wood frame structural system clad in aluminum siding. The south façade features a stone veneer plinth. The south façade features stoop with an asphalt-shingled, gable roof; and wrought iron balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a storm door. The house features individual and paired, 6/6, metal, double-hung sash windows. A metal awning surmounts the window on the west end of the façade. The roof is side gable clad in asphalt shingles. The house features a central, interior, brick chimney.
CONTRIBUTING (1 - building)

West 32nd Street

PROPERTY ADDRESS: **112 West 32nd Street**
PROPERTY NAME: House, 112 West 32nd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1908

DHR NUMBER (S): 122-5087-0745
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1908. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features one-story, three-bay porch with an asphalt-shingled, hipped roof; and plain, wood posts and balustrade. There is a two-story, projecting block with a projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable features a boarded window opening. There is a single-leaf, wood, 6-paneled door surmounted by a transom on the west canted wall of the bay. There is also a single-leaf door surmounted by a boarded transom on the east end of the façade. The house features 1/1 and 6/1, metal, double-hung sash windows. The roof is hipped-cross-gable clad in asphalt shingles with a boxed cornice and wide eaves. There is a two-story, projecting, canted any surmounted by a closed gable on the east elevation. There is an intersecting, closed gable on the west elevation. The house features an interior, brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **115 West 32nd Street**
PROPERTY NAME: Duplex, 115 West 32nd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1904
DHR NUMBER (S): 122-5087-0746
DESCRIPTION (S):
This is a two-story duplex designed in the Late 19th and Early 20th Century American Movement style and constructed in 1904. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a two-story, two-bay porch with an asphalt-shingled, hipped roof; two-story wood piers resting on brick pedestals; and wood balustrades. There are two entrances on the first-story façade. The entrance are comprised of single-leaf, metal, paneled door. There is a single-leaf, wood door with multiple lights accessing the second story porch. The duplex features 1/1, wood, double-hung sash windows with storm windows. The first story windows have been boarded. The roof is gable clad in asphalt shingles. There is a two-story block situated on the south elevation that extends to the east. The block features a two-story porch on the south elevation. The duplex features an interior, brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **116 West 32nd Street**
PROPERTY NAME: House, 116 West 32nd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1900
DHR NUMBER (S): 122-5087-0747
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1900. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding.

The south façade features a two-story, one-bay porch with an asphalt-shingled, shed roof. The first story porch features vinyl-clad posts and balustrade. The second story porch features plain, wood posts and balustrade. There are two single-leaf entrances on the first-story façade. There is a two-story, projecting, squared block on the west end of the façade. The house features 9/1 and 6/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows. The roof is hipped clad in asphalt shingles. There is a Jerkinhead-gable-roofed dormer on the façade that features paired, boarded window openings. There is a one-story, projecting, squared bay on the second story of the east elevation. There is a parged, concrete block wall appended to the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **121 West 32nd Street**
PROPERTY NAME: Apartment Building, 121 West 32nd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1966
DHR NUMBER (S): 122-5087-0748
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1966. The apartment building is comprised of three, individual buildings linked by metal stairs and porches. The building grouping occupies a U-shaped footprint on the property. They incorporate concrete block foundations clad in brick veneer and wood frame structural systems clad in brick veneer. The courtyard of the buildings features two-story porches sheltered by the wide eaves of the main roofs. The porches feature wrought-iron posts and balustrades. The buildings feature single-leaf doors that access each of the units. The buildings feature metal, sliding windows with rowlock brick sills. The roofs are comprised of gables clad in asphalt shingles.
NON-CONTRIBUTING (3 – buildings)

PROPERTY ADDRESS: **207 West 32nd Street**
PROPERTY NAME: Apartment Building, 207 West 32nd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-0749
DESCRIPTION (S):
This is a two-story apartment building designed in the Craftsman style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The north façade features two, two-story, one-bay porches flanking a central entrance. The porches are incorporated under the main roof and feature brick piers and wood-shingled balustrades. The primary entrance is centrally located and features a single-leaf door surmounted by a transom accessing a vestibule. There are single-leaf, wood doors with lights and storm doors accessing each of the porches. The building features individual and paired, 6/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles with exposed, wood rafters and wide eaves.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **209 West 32nd Street**
PROPERTY NAME: Duplex, 209 West 32nd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-0751
DESCRIPTION (S):
This is a two-story duplex designed in the Craftsman style and constructed in 1914. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The north façade features a projecting, two-story, two-bay porch with an asphalt-shingled gable roof; brackets under the roof rakes; and wood-shingled piers and balustrade. The primary entrance is comprised of a single-leaf door surmounted by an asphalt-shingled, shed-roofed overhang supported by wood brackets. There are single-leaf, wood doors with lights and storm doors accessing the porches. The building features individual and paired, 6/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles with exposed, wood rafters under the rakes.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **214 West 32nd Street**
PROPERTY NAME: House, 214 West 32nd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1902
DHR NUMBER (S): 122-5087-0752
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1902. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, wraparound porch with an asphalt-shingled hipped roof; slender, wood columns; replacement, wood posts resting on brick pedestals; and a balustrade with missing balusters. The primary entrance is comprised of a single-leaf door surmounted by a boarded transom and flanked by boarded sidelights. There is an additional single-leaf, metal, paneled door on the east elevation. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable is clad in wood shingles and features a 1/1, double-hung sash window. The house features 1/1, wood, double-hung sash windows with storm windows. Most of the first story windows have been boarded. There is a two-story, projecting, canted bay surmounted by a closed gable on the east elevation. There are two, intersecting gables on the east elevation at the base of the chimneys. There is a two-story, projecting, squared bay surmounted by a closed gable on the west elevation. The roof is hipped-cross-gable clad in asphalt shingles with a boxed cornice. There is a gable-roofed dormer on the west elevation that features a double-hung sash window surmounted by a closed gable. The house features two, interior, brick chimneys with corbelled caps on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **215 West 32nd Street**

PROPERTY NAME: House, 215 West 32nd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0753
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a dentiled cornice; a wide frieze; square, wood columns; and a wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a fan-shaped light surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles. There is an intersecting gable on the north façade.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **218 West 32nd Street**
PROPERTY NAME: House, 218 West 32nd Street
OTHER NAME (S): Moore, Floyd, House
CONSTRUCTION DATE: 1901
DHR NUMBER (S): 122-5087-0201
DESCRIPTION (S):
This building is a single-family dwelling constructed in 1901. It has a modified cross-plan and is 2-1/2-stories surmounted by a cross gable roof. The foundation is parged in a faux stone pattern over the brick and is punctuated by metal vents. The structural system is wood-frame clad in vinyl siding. Under the vinyl siding is asbestos siding visible in the façade gable. A projecting block with a gable end dominates the façade. The wall is two-bay with 2/2, wood double-hung sashes punctuating the wall on the first and second stories. Within the gable, there is a smaller 2/2, wood, double-hung sash window. There is a raking cornice with wide frieze on this block with solid brackets. Within the roof gable is a carved vergeboard. To the west of the projecting block is side-gable block. The one-story porch is located on the west wall of the façade block and the south wall of the west block. The porch has a hipped roof and is supported by turned posts. The foundation is brick and floor is wood. A brick stair flanked by wing walls projects from the south end of the porch, south of the wall. Faux stone has been applied to the first story of the south wall of the west projecting block, and the first story of the west wall of the south projecting block, which is located under the porch roof. The east and west projecting blocks have similar articulation to the south projecting block. There is a cornice with wide frieze and brackets. The west gable end has a vergeboard at the apex of the gable. Chimneys pierce the roof near the ridgelines and are brick. Those located at the south end have corbelled caps. The dwelling incorporates a number of additions. There is a two-story addition on the north end. It has a parged foundation punctuated by vents. The structural system is frame clad in vinyl siding. The proportions of the addition are shorter than the main dwelling. The roof is a low-raking gable, which terminates below the attic window on the north elevation of the main house. Windows are primarily located on the east and west elevations and are evenly spaced.

- There is circa 1950 concrete-block garage with two-stories and a gable roof clad in asphalt shingles. There is an oversized door opening on the north elevation onto Broadway Street. This doorway has

been filled with concrete block allowing an opening for a single-leaf, metal door. Above the door is a wide steel lintel. On the second story of the north elevation is a window opening that has been boarded. On the west elevation at the north corner there is another oversized door that has been filled with concrete block. On the south corner of the west elevation, there is a single-leaf, metal door sheltered by a metal overhang. The windows on the second story are 6-light, wood, casement. The south elevation has a window opening on the second story, and a stovepipe hole located at the east corner of the south elevation. The east elevation has three 6-light, wood, casement windows on the second story similar in form to those on the west elevation. The interior was inspected from the exterior door. It is open with exposed concrete block walls. The ceiling of the first story is composite wallboard. The wood stairs to the second story are located in the northeast corner.

- There is a small shed on site. It is concrete block with a corrugated-metal, shed roof. There is a single-leaf door opening centrally placed on the east elevation.

CONTRIBUTING (3 - buildings)

PROPERTY ADDRESS: **219 West 32nd Street**
PROPERTY NAME: House, 219 West 32nd Street
OTHER NAME (S): Apartment Building, 219 West 32nd Street
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0754
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a two-story, three-bay porch with an asphalt-shingled, hipped roof; chamfered, wood posts; and asbestos-clad balustrades. The primary entrance is comprised of a single-leaf door with a storm door. There is a single-leaf door with a storm door accessing the second story porch. The house features 2/2, wood, double-hung sash windows with storm windows. There is a one-story, projecting, canted bay on the east elevation. There is a two-story, projecting, squared block appended to the west elevation. The roof is gable clad in asphalt shingles with a boxed cornice.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **221 West 32nd Street**
PROPERTY NAME: House, 221 West 32nd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1913
DHR NUMBER (S): 122-5087-0755
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1913. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features wood, Tuscan columns and a closed balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door surmounted

by a transom. The house features individual and tripartite, 9/1, wood, double-hung sash windows with storm windows. There is an oversized, gable-roofed dormer on the north façade. The dormer features a tripartite window surmounted by a closed gable with a wide frieze and a cornice. The roof is side gable clad in asphalt shingles with cornice returns on the east and west elevations.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in weatherboard. The garage features a wood, sliding door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **225 West 32nd Street**
PROPERTY NAME: House, 225 West 32nd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0756
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and turned balusters. The primary entrance is comprised of a single-leaf door surmounted by a transom. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable features a double-hung sash window. The house features 1/1, wood, double-hung sash windows with storm windows. There is a fixed Queen Anne window on the west elevation. The roof is hipped-cross-gable clad in asphalt shingles. There is an intersecting gable on the west elevation. The house features an interior, brick chimney with a corbelled cap on the east elevation. There is also an exterior, parged brick chimney with a corbelled cap on the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **230 West 32nd Street**
PROPERTY NAME: House, 230 West 32nd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0757
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; turned balusters; and a metal awning. The primary entrance is comprised of a single-leaf door with a storm door. The house features 1/1, wood, double-hung sash windows with storm windows. Metal awnings surmount the second story façade windows. The roof is gable clad in asbestos shingles with cornice returns. There is a metal, louvered vent in the façade gable. The house features two, interior, brick chimneys with corbelled caps on the east elevation. There is a one-story porch appended to the north elevation.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **231 West 32nd Street**
PROPERTY NAME: House, 231 West 32nd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1908
DHR NUMBER (S): 122-5087-0758
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1908. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; a wide frieze; and a missing porch balustrade. The primary entrance is comprised of a single-leaf, wood door with two, vertical lights flanked by a sidelight on the west side. The house features 1/1, metal, double-hung sash windows. There is a closed gable on the façade that is clad in fishscale-cut, wood shingles and features paired, metal, double-hung sash windows. The roof is Jerkinhead-gable clad in asphalt shingles with a cornice and wide frieze. There is an intersecting, closed gable on the west elevation that features a double-hung sash window. The house features a central, interior, brick chimney with a corbelled cap.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1950. The garage features a brick structural system and an asphalt-shingled, hipped roof.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **235 West 32nd Street**
PROPERTY NAME: House, 235 West 32nd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0760
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a parged brick foundation and a wood frame structural system. The first story is clad in vinyl siding and the second story is clad in wood shingles. The north façade features a two-story, two-bay porch incorporated under the main roof. The porch features plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light. There is a single-leaf, metal, paneled door accessing the second story porch. The house features individual and paired, 1/1, metal, double-hung sash windows. The roof is hipped clad in asphalt shingles with exposed wood rafters under the eaves.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **237 West 32nd Street**
PROPERTY NAME: House, 237 West 32nd Street

OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0761
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a parged brick foundation and a wood frame structural system. The first story is clad in weatherboard and the second story is clad in wood shingles. The north façade features a two-story, two-bay porch incorporated under the main roof. The first story porch features battered, wood piers resting on parged brick pedestals; and a plain, wood balustrade. The second story porch features square, wood columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door. There is a single-leaf door accessing the second story porch. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a fixed, wood, Queen Anne window on the first story façade. The roof is hipped clad in asphalt shingles with exposed rafters and wide eaves.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **238 West 32nd Street**
PROPERTY NAME: House, 238 West 32nd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0762
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1912. It incorporates a brick foundation and a brick structural system. The south façade is clad in brick veneer. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; turned balusters; and a wide frieze. The primary entrance is comprised of a single-leaf, wood, paneled door with twelve lights and two panels and a storm door surmounted by a 3-light transom and flanked by 3-light sidelights with panels. There is a one-story, projecting, canted bay on the east end of the second story façade. The canted bay is clad in vinyl siding. The house features 1/1, wood, double-hung sash windows with storm windows and rusticated stone sills surmounted by brick, flat arches. There is a hip-roofed dormer on the façade that features a tripartite window of wood, Queen Anne windows with storm windows. There are hip-roofed dormers on the east and west elevations. The roof is hipped clad in asphalt shingles with wide eaves. The house features two, interior, brick chimneys with corbelled caps on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **241 West 32nd Street**
PROPERTY NAME: House, 241 West 32nd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-0763
DESCRIPTION (S):

This is a two-story house designed in the Craftsman style and constructed in 1921. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, one-bay porch with an asphalt-shingled, gable roof; battered, wood piers; a plain, wood balustrade; brackets under the rakes; and exposed rafters under the eaves. The primary entrance is comprised of a single-leaf door with a wrought iron storm door. The house features individual and tripartite, 1/1, metal, double-hung sash windows. There is a metal, louvered vent in the façade gable. There is a single-leaf door on the west elevation. The roof is gable clad in asphalt shingles with exposed wood rafters under the wide eaves and brackets under the rakes. The house features an exterior, brick chimney on the east elevation. There is a one-story ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **242 West 32nd Street**
PROPERTY NAME: House, 242 West 32nd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-0098 122-0746
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1915. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a two-story porch sheltered by an asphalt-shingled, hipped roof with wide eaves. The first story porch features brick piers; a wrought iron post; and a replacement, wood balustrade. The second story porch has been enclosed and is clad in vinyl siding punctuated by 1/1, metal, double-hung sash windows. The primary entrance is comprised of a double-leaf, wood, paneled door with storm doors surmounted by a transom. The house features 1/1, metal, double-hung sash windows. There is a one-story, projecting, canted bay on the west end of the first story façade. The façade gable features a round, louvered vent. The roof is gable clad in asphalt shingles. There is a two-story porch appended to the north elevation and surmounted by an asphalt-shingled, hipped roof. The house features an interior, parged brick chimney with a corbelled cap and a metal chimney pot on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **243 West 32nd Street**
PROPERTY NAME: House, 243 West 32nd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0764
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1919. It incorporates a brick foundation and a wood frame structural system clad in weatherboard. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with lights.

The house features individual and paired, 1/1, metal, double-hung sash windows. There is an oversized, shed-roofed dormer on the north façade that shelters a second-story porch. The porch features clustered, wood posts resting on vinyl-clad pedestals: and a wood balustrade. There is a single-leaf door accessing the second story porch. The roof is side gable clad in asphalt shingles. The house features an exterior, brick chimney on the east elevation. The portion of the chimney above the roofline has been parged.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **244 West 32nd Street**
PROPERTY NAME: House, 244 West 32nd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-0765
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The south façade features a one-story, three-bay porch incorporated under the main roof. The porch features battered, wood piers resting on brick pedestals; and a wood-shingled balustrade. The primary entrance is centrally located and is comprised of a single-leaf, wood, paneled door with lights and a storm door. The house features individual and paired, 6/1, wood, double-hung sash windows. There is a shed-roofed dormer on the south façade. The dormer features a four-part window of 6/1, wood, double-hung sash windows; wood brackets under the rakes and exposed, wood rafters under the eaves. There is a one-story, projecting, squared bay on the west elevation that features a tripartite window. The roof is side gable clad in asphalt shingles with brackets under the rakes and exposed wood rafters under the eaves. The house features an exterior, brick chimney with a corbelled cap on the west elevation. The portion of the chimney above the roofline has been parged.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **245 West 32nd Street**
PROPERTY NAME: House, 245 West 32nd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0766
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1919. It incorporates a brick foundation and a wood frame structural system clad in weatherboard. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door within an exposed vestibule. The house features individual and paired, 1/1, metal, double-hung sash windows. There is an oversized, shed-roofed dormer on the north façade that shelters a second-story porch. The porch features clustered, wood posts resting on vinyl-clad pedestals; and a wood balustrade. There is a single-leaf, wood door with lights accessing the second story porch. The roof is side gable clad in asphalt shingles. The house features

an exterior, brick chimney on the west elevation. The portion of the chimney above the roofline has been parged.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **248 West 32nd Street**
PROPERTY NAME: House, 248 West 32nd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0100 122-0745
DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The south façade features a one-story, three-bay porch incorporated under the main roof. The porch features battered, wood piers resting on brick pedestals; and a wood, balustrade. The primary entrance is centrally located and is comprised of a single-leaf door. The house features 6/1, wood, double-hung sash windows with storm windows. There is a one-story, squared oriel surmounted by a pent roof on the east elevation. There is an oversized, shed-roofed dormer on the façade. The dormer features 6/1, wood, double-hung sash windows with storm windows and brackets under the rakes. There is a single-leaf door with a storm door accessed by wood stairs and surmounted by a pent roof overhang on the east elevation. The house features an exterior, brick chimney with a corbelled cap on the east elevation. The roof is side gable with brackets under the rakes.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **249 West 32nd Street**
PROPERTY NAME: House, 249 West 32nd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0767
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a two-story, two-bay porch with an asphalt-shingled, hipped roof. The first story porch features wood posts resting on brick pedestals; and a plain, wood balustrade. The second story porch features square, wood columns; and turned balusters. The primary entrance is comprised of a single-leaf door with a wrought iron storm door surmounted by a transom. There is a single-leaf door accessing the second story porch. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles. There is a hip-roofed dormer on the west elevation that is clad in wood shingles and features a metal, sliding window. There is a two-story, projecting, squared block with a hipped roof intersecting the main roof on the southwest corner of the house. There is a one-story hip-roofed ell appended to the south elevation. The house features an interior, brick chimney with a corbelled cap on the east elevation. This house has been converted into a duplex.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, roll-up, garage door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **300 West 32nd Street**
PROPERTY NAME: House, 300 West 32nd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-0768
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1907. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, shed roof; and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with two lights. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable features a boarded window. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is hipped-cross-gable clad in asphalt shingles. There is a two-story, projecting, canted bay surmounted by a closed gable on the east elevation. The house features an interior, brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **301 West 32nd Street**
PROPERTY NAME: Episcopal Church of the Ascension
OTHER NAME (S): Church, 301 West 32nd Street/Faith Fellowship Christian Center of Norfolk
CONSTRUCTION DATE: 1915
ARCHITECT: Vance Hebard
E. L. Meyer (contractor)
DHR NUMBER (S): 122-5087-0101 122-0403
DESCRIPTION (S):
This is a two-story church designed in the Gothic Revival style and constructed in 1915. It incorporates a brick foundation and a structural system clad in brick veneer. A brick watertable marks the base of the building. There are one-story angled buttresses on each elevation. The church nave is oriented east-west with its entrance on the south elevation within an intersecting gabled bay. The church features two, projecting, squared gable-roofed bays on the south facade. The bays feature brick buttresses at the corners, flared roof eaves, and exposed wood rafters with carved ends. The east bay contains the church entrance and features a double-leaf, wood, pointed arch-shaped door. Surmounting the door is a solider- and header-course arch articulation. There are concrete parged brick stairs leading to the door with wrought-iron railings. The west bay exhibits stained glass windows on each elevation. The church features wood, stained glass, pointed arch windows on the south, west and north elevations with rowlock brick-course sills and rowlock- and solider-course brick pointed arch articulation. The church roof features triangular dormers on the north and south elevations with pointed arch,

stained glass windows. The dormers are clad in asphalt shingles. There is a large, stained glass, pointed arch window on the east elevation. The roof is a high-pitched gable clad in asphalt shingles roof with flared eaves and carved exposed wood rafters under the eaves. The church is connected to the later educational building by a one-story, gable-roofed hyphen located at the west end of the north elevation. The hyphen features a single-leaf, plate glass door.

- This is a two-story educational building designed in the Gothic Revival style and constructed circa 1930. This building occupies an L-shaped footprint, which forms a small courtyard to the north of the original church. The building features a brick foundation and structural system clad in brick veneer. There is a brick watertable at the same level as the watertable on the original church. The north facade features two entrances situated in parapeted bays at the east and west corners. The east entrance is comprised of double-leaf, metal doors with lights surmounted by a gable-roofed overhang featuring stickwork and brackets. The west entrance features a single-leaf, metal door with a light surmounted by a gable-roofed overhang featuring stickwork and brackets. The north and south elevations feature brick buttresses. There are double-leaf, metal, doors with lights surmounted by a gable-roofed overhang featuring stickwork and brackets on the south elevation at the east corner. The building features 1/1, metal and vinyl, double-hung sash windows. There is a single-leaf, wood, paneled door on the east elevation. The east elevation also features paired, 1/1, vinyl double-hung sash windows with rowlock brick sills. The east elevation wall at the north end features a pointed arch blank window. There are three rectangular fixed windows below it. There are triangular dormers on the north and south elevations that feature louvered vents. The roof is gable clad in the slate shingles with a parapet. The parapet is coped in a rowlock brick course. There is a two-story, eastward projecting, squared bay on the east elevation at the south corner near the hyphen that features a cross in the gabled portion of the parapet. The church features an interior, brick chimney on the west elevation.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **307 West 32nd Street**
PROPERTY NAME: House, 307 West 32nd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0102 122-0744
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; turned balusters; and a metal awning. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light. The house features 9/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, squared bay surmounted by a closed gable on the east end of the façade. The closed gable features a 9/1, wood, double-hung sash window. There is an intersecting, closed gable on the west elevation. The roof is hipped clad in asphalt shingles with a boxed cornice. The building features an interior, brick chimney on the east elevation.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **311 West 32nd Street**
PROPERTY NAME: House, 311 West 32nd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1913
DHR NUMBER (S): 122-5087-0769
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1913. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; square, wood columns; and turned balusters. The primary entrance is comprised of a single-leaf, wood paneled door with a storm door surmounted by a transom. The house features 1/1 and 2/2, wood, double-hung sash windows with storm windows. There is a fixed, 1-light window on the west elevation. The roof is gable clad in asphalt shingles. There is a closed gable on the façade that features paired, 1/1, wood, double-hung sash windows. The house features an interior, brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **319 West 32nd Street**
PROPERTY NAME: House, 319 West 32nd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-0770
DESCRIPTION (S):
There is a one-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a porch clad in aluminum siding and enclosed by jalousie windows. The primary entrance is comprised of a single-leaf, wrought iron storm door surmounted by a transom and flanked by jalousie windows. The house features wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles with exposed rafters under the eaves. The house features an interior, parged brick chimney with a corbelled cap.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1940. It incorporates a wood frame structural system clad in asbestos siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **321 West 32nd Street**
PROPERTY NAME: House, 321 West 32nd Street
OTHER NAME (S):

CONSTRUCTION DATE: 1903
DHR NUMBER (S): 122-5087-0771
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1903. It incorporates a parged brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, enclosed porch with an asphalt-shingled, hipped roof; a dentiled cornice; a metal awning; and wood, Tuscan columns. The porch has been enclosed with screens and vertical board. The primary porch entrance is comprised of a single-leaf, metal, paneled storm door. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable features a double-hung sash, wood, Queen Anne window; a dentiled cornice and raking cornice. The house features 9/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles with a dentiled cornice. There is a gable-roofed dormer with cornice returns on the east elevation. There is an intersecting gable on the west elevation.

- This is a one-story shed designed in the Queen Anne style and constructed circa 1910. It incorporates a wood frame structural system clad in vertical board. The shed features a 5-panel, single-leaf door. The roof is catslide clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

33rd Street

PROPERTY ADDRESS: **108 33rd Street**
PROPERTY NAME: House, 108 33rd Street
OTHER NAME (S): Duplex, 108 33rd Street
CONSTRUCTION DATE: 1911
DHR NUMBER (S): 122-5087-0776
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1911. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; fluted, Doric columns; a wide frieze; and turned balusters. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable is clad in wood shingles and features a 1/1, metal, double-hung sash window. There are two entrances on the south façade. The west entrance is comprised of a single-leaf, wood door. The east entrance is located on the canted bay and is comprised of a single-leaf door with storm door surmounted by a transom. The house features 1/1, metal and wood, double-hung sash windows with storm windows. There is a window with an oval shaped-light on the second story of the canted bay. There is a hip-roofed dormer on the south façade that is clad in wood shingles and features a double-hung sash window. There is a closed gable on the west elevation. There is a two-story, projecting, canted bay surmounted by a closed gable on the east elevation. The roof is hipped clad in slate shingles with wide eaves. The house features a central, interior, brick chimney. This house has been converted into a duplex.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **110 33rd Street**
PROPERTY NAME: Apartment Building, 110 33rd Street
OTHER NAME (S): Shipp Apartment Building
CONSTRUCTION DATE: circa 1920
DHR NUMBER (S): 122-5087-0777
DESCRIPTION (S):
This is a three-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a 6-course, American bond brick foundation and structural system. The south façade features two, three-story, one-bay porches flanking the central entrance. The porches share a common hipped roof and feature tall, brick piers, and plain, wood balustrades. Single-leaf, wood, 15-light doors access each of the porches. The primary entrance is comprised of a double-leaf, wood door surmounted by a limestone marker with the building's name. The building features individual and paired 6/1, wood, double-hung sash windows with rowlock brick sills. The building features a brick, corbelled cornice on the façade and side elevations. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **111 33rd Street**
PROPERTY NAME: House, 111 33rd Street
OTHER NAME (S): Duplex, 111 33rd Street
CONSTRUCTION DATE: 1913
DHR NUMBER (S): 122-5087-0778
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1913. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features one-story, two-bay porch with an asphalt-shingled, hipped roof; and plain, wood posts and balustrade. There are two entrances on the façade. The east entrance is comprised of a single-leaf, metal, paneled door with a storm door. The west entrance is comprised of a single-leaf, metal, paneled door with nine lights. The house features individual and paired, 1/1, metal, double-hung sash windows. The roof is hipped clad in asphalt shingles. There are hip-roofed dormers on the north facade and the east and west elevations.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **115 33rd Street**
PROPERTY NAME: House, 115 33rd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-0779
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1914. It incorporates a brick foundation and a wood frame structural system. The north façade is clad in weatherboard

and the side elevations are clad in asbestos shingles. The north façade features one-story, two-bay porch with an asphalt-shingled, hipped roof; and square, wood columns; and a plain, wood balustrade. The east end of the porch has been screened and features a single-leaf, wood, screen door accessing the enclosed section. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door surmounted by a transom. The house features 1/1, metal, double-hung sash windows. There is a one-story, projecting, squared bay surmounted by a closed gable on the east end of the second story façade. The closed gable is clad in fishscale-cut, wood shingles and features a double-hung sash window. There is a gable-roofed dormer on the façade that features a double-hung sash window surmounted by a fishscale-cut, wood-shingled closed gable. There is a gable-roofed dormer on the east elevation that features a double-hung sash window surmounted by a fishscale-cut, wood-shingled closed gable. There is a gable-roofed dormer on the west elevation that features cornice returns. The roof is hipped clad in asphalt shingles with a boxed cornice and wide frieze. The house features an interior, brick chimney with a corbelled cap on the east elevation.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1990. It incorporates a wood frame structural system clad in vinyl siding. The shed features a single-leaf, metal, paneled door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **117 33rd Street**
PROPERTY NAME: House, 117 33rd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0780
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1912. It incorporates a brick foundation and a wood frame structural system clad in weatherboard. The north façade features one-story, wraparound porch with an asphalt-shingled, hipped roof; and wood, Tuscan columns; and turned balusters. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door surmounted by a transom. There is a two-story, projecting, canted bay surmounted by a closed gable on the west elevation. The north canted wall of the bay features a single-leaf door with a storm door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. The windows on the first story have been boarded. There is a one-story, projecting, squared bay surmounted by a closed gable on the west end of the second story façade. The closed gable is clad in fishscale-cut, wood shingles and features a double-hung sash window. There is a gable-roofed dormer on the façade that features a double-hung sash window surmounted by a fishscale-cut wood-shingled, closed gable. There is a dormer on the east elevation. The roof is hipped-cross-gable clad in asphalt shingles with a boxed cornice and wide frieze. The house features two interior, brick chimneys with corbelled caps on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **201 33rd Street**

PROPERTY NAME: House, 201 33rd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0781
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay, enclosed porch with an asphalt-shingled, hipped roof; and vinyl-clad, square posts. The porch is clad in vinyl siding punctuated by 1/1, metal, double-hung sash windows. The primary entrance is comprised of a single-leaf, metal, 6-panel door. The house features 1/1, metal, double-hung sash windows. There is a closed gable on the north façade that features paired, double-hung sash windows; modillions under the eaves; and a wide frieze. There is an intersecting, closed gable on the west elevation that features paired, 1/1, wood double-hung sash windows with storm windows. There is a hip-roofed dormer on the south elevation. The roof is hipped-cross-gable clad in asphalt shingles with a wide frieze and modillions under the eaves. The house features an interior, brick chimney with a corbelled cap on the west elevation.

- This is a one-story carport designed in the Modern Movement style and constructed circa 1970. It incorporates a metal frame structural system.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - structure)

PROPERTY ADDRESS: **204 West 33rd Street**
PROPERTY NAME: House, 204 West 33rd Street
OTHER NAME (S): Wilson, Norman, House
CONSTRUCTION DATE: 1913
DHR NUMBER (S): 122-5087-0203
DESCRIPTION (S):
This Colonial Revival inspired Bungalow is 1-½-stories and frame construction. The building is clad in vinyl siding on the first story and wood shingles on the ½ story. The façade is dominated by a two-bay porch with Tuscan columns. The columns terminate in a wide cornice that continues around the dwelling at the base of the ½ story. The porch has a turned balustrade. There is a single-leaf entrance with replacement, metal door surmounted by a transom. In the west bay of the first story, two bay façade there is a three-part window. The windows on the dwelling are replacement, metal, double-hung sash with 1/1 lights. The roof is side-gable with a raking cornice and cornice returns. The roof terminates at the porch, and forms the porch roof. There is an oversized dormer on the façade rake of the roof. It has a three-part window with a closed gable. The gable has a wide frieze, cornice and raking cornice. There is a louvered vent in the closed gable. A chimney rises from the apex of the dormer roof near the intersection with the main roof. The roof is treated in asphalt shingle. The side elevations continue the raking cornice and cornice between the first and ½ stories. The north elevation is marked by a wall dormer with closed gable. The gable continues the cornice and raking cornice found on the dormer on the façade. There is a porch on the north elevation at the east corner. It has plain posts and a wood floor. A one-story ell is located at the west corner of the north elevation.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **224 West 33rd Street**
PROPERTY NAME: House, 224 West 33rd Street
OTHER NAME (S):
CONSTRUCTION DATE: circa 1905
DHR NUMBER (S): 122-5087-0207
DESCRIPTION (S):
This building is a 2-½-story, frame single-family dwelling with a hipped-cross-gable roof clad in asphalt shingles. The frame building is clad in wood shingles and rests on a brick foundation. The projecting gable block is canted and is surmounted by a closed gable. The closed gable is shingled with a centrally-placed window. The porch on the façade is L-shaped terminating at the east projecting block. The porch has replacement wood supports and balustrade. The porch roof is hipped. The entrance is double-leaf surmounted by a transom. The doors are missing. There are window openings on all elevation. The east and west elevations have closed gables on the end with similar treatment to the façade gable. The projecting block on the north elevation is hipped. There is a cornice at the roofline with wide frieze. A chimney pierces the roof on the west rake at the south corner. It has a corbelled cap. There are two ells on the north elevation. There is an ell on the north elevation of the projecting hipped block with a shed roof and an ell situated on the north elevation of the east block and east elevation of the north block with a hipped roof. The northwest ell has a chimney on the west elevation with a corbelled cap. Both ells have a small cornice at the roof lines.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **234 33rd Street**
PROPERTY NAME: House, 234 33rd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1900
DHR NUMBER (S): 122-5087-0783
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1900. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a two-story porch with an asphalt-shingled, shed roof. The first story porch has three bays and features a boxed cornice; wood, turned posts; wrought-iron posts; and a plain, wood balustrade. The second story porch has been screen and features a vinyl-clad balustrade. There is a single-leaf door accessing the second story porch. The primary entrance is comprised of a single-leaf, wood, paneled door with nine lights surmounted by a boarded transom. The house features 1/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, canted bay on the east end of the façade. The façade gable features paired, 1/1, wood, double-hung sash windows. There is a gable-roofed dormer on the west elevation. The roof is gable clad in asphalt shingles. The house features an interior brick chimney on the north elevation. There is a one-story ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **238 33rd Street**
PROPERTY NAME: House, 238 33rd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-0784
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1921. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood door with a storm door surmounted by a 7-light transom and flanked by multiple-light sidelights. The house features 1/1, metal, double-hung sash windows. Non-functional shutters flank the façade windows. There is a window on the west elevation that is surmounted by a shed roof overhang. There is a single-leaf, metal, paneled door on the west elevation. The façade features a gable-roofed wall dormer with a sliding, metal window. There are gable-roofed wall dormers on the east and west elevations that feature sliding, metal windows. The roof is hipped clad in asphalt shingles with a boxed cornice and wide eaves. The house features an interior brick chimney on the east elevation. There is a one-story, shed-roofed ell appended to the east elevation. The ell features 9/9, metal, double-hung sash windows.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1990. It incorporates a wood frame structural system clad in vinyl siding. The shed features a single-leaf, metal, paneled door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **310 33rd Street**
PROPERTY NAME: House, 310 33rd Street
OTHER NAME (S):
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-0785
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1907. It incorporates a parged brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; a boxed cornice; and turned balusters. The primary entrance is a comprised of a single-leaf door with a storm door surmounted by a transom. There is a two-story, projecting, squared bay surmounted by a closed gable on the east end of the façade. The house features 1/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, canted bay surmounted by a closed gable on the east elevation. There is a hip-roofed dormer on the east elevation. The roof is hipped-cross-gable clad in asphalt shingles with a boxed cornice and wide eaves. The house features an interior, brick chimney on the north elevation. There is a one-

story ell appended to the north elevation. The ell features a single-leaf door with a storm door accessed by a wood stair.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1990. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, paneled, roll-up garage door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **314 33rd Street**
PROPERTY NAME: House, 314 33rd Street
OTHER NAME (S): Rife, Daniel T., House
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0786
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and turned balusters. The primary entrance is a comprised of a single-leaf, metal, paneled door surmounted by a transom. There is a two-story, projecting, squared bay surmounted by a closed gable on the west end of the façade. The closed gable features a 4/4, wood, double-hung sash window. The house features 6/6, metal, double-hung sash windows. There is a two-story, projecting, squared bay surmounted by a closed gable on the east elevation. There is a closed gable surmounting a two-story, canted bay on the west elevation. There are hip-roofed dormers that feature 4/4, wood, double-hung sash windows on the south façade and east elevation. The roof is hipped-cross-gable clad in asphalt shingles with a boxed cornice and wide eaves. The house features interior, brick chimneys with corbelled caps on the north and west elevations.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1990. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, paneled, roll-up garage door; and a single-leaf, metal, paneled door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

34th Street

PROPERTY ADDRESS: **109 34th Street**
PROPERTY NAME: House, 109 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 2004
DHR NUMBER (S): 122-5087-0796

DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 2004. It is designed to resemble a Colonial Revival style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The west end of the north façade features a one-story, one-bay porch with an asphalt-shingled, shed roof. The primary entrance is centrally located and is comprised of a single-leaf, metal, paneled door with a fan-shaped light. The house features individual and paired, 6/6, 4/4, and 9/9, metal, double-hung sash windows. Non-functional shutters flank the façade windows. There is a two-story, projecting, squared bay on the west end of the façade that is surmounted by an intersecting gable. The east end of the façade features a metal, paneled, roll-up, garage door surmounted by an asphalt-shingled, pent roof. There is a single-leaf door located on the east elevation. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **110 34th Street**
PROPERTY NAME: House, 110 34th Street
OTHER NAME (S): Duplex, 110 34th Street
CONSTRUCTION DATE: 1908
DHR NUMBER (S): 122-5087-0797
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1908. It incorporates a rusticated stone foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, five-bay porch with an asphalt-shingled, hipped roof; a wide frieze; paired, wood, Tuscan columns resting on rusticated stone piers; and a plain, wood balustrade. The porch features a centrally located, projecting, rounded portico with wood, Tuscan columns. The south façade features two entrances. The west entrance is comprised of a single-leaf, metal, paneled door surmounted by a transom. The east entrance is comprised of a single-leaf door with a storm door surmounted by a transom and flanked by sidelights. The house features 1/1, wood double-hung sash windows with storm windows. There is a one-story, projecting, canted bay on the second story façade. There are one-story, projecting, canted bays surmounted by asphalt-shingled roofs on the east and west elevations. There is a hip-roofed dormer on the façade that features a tripartite window. There is a hip-roofed dormer on the west elevation that features a double-hung sash window. The roof is hipped clad in asphalt shingles with wide eaves. There is a one-story ell appended to the north elevation. The house features a central, interior, brick chimney with a corbelled cap. This house has been converted into a duplex.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **113 34th Street**
PROPERTY NAME: House, 113 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-0798
DESCRIPTION (S):

This is a two-story house designed in the Queen Anne style and constructed in 1915. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light. The house features 1/1, wood, double-hung sash windows with storm windows. There is an intersecting, closed gable on the north façade that features a 2/1, wood, double-hung sash window. There are two-story, projecting, canted bays surmounted by closed gables on the east and west elevations. The roof is hipped-cross-gable clad in slate shingles. The house features an interior, parged brick chimney with a corbelled cap on the east elevation and a central, interior, parged brick chimney with a corbelled cap. There is a two-story, incorporated porch on the southeast corner of the house.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **115 34th Street**
PROPERTY NAME: House, 115 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-0799
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; oversized, wood piers resting on brick pedestals; and a closed balustrade. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a transom. The house features individual, paired and tripartite, 1/1, metal, double-hung sash windows. There is a two-story, projecting, squared block surmounted by a gable on the east elevation. There is a one-story, projecting, squared bay appended to the first story of the block on the east elevation. There is a two-story, projecting, squared bay on the west elevation surmounted by a gable. There are gable-roofed dormers on the east and west elevations. The roof is cross-gable clad in asphalt shingles. The house features an interior, brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **201 34th Street**
PROPERTY NAME: Apartment Building, 201 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: circa 1980
DHR NUMBER (S): 122-5087-0800
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed circa 1980. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system. The north façade is clad in common bond brick veneer. The first stories of the side elevations are clad in brick veneer and the second stories are clad in vinyl siding. There are nine entrances on the north façade. The entrances are comprised of single-leaf, metal, paneled doors. The second story entrances are accessed by metal staircases. An

extension of the main roof shelters the second story entrances. The building features 1/1, metal, double-hung sash windows with rowlock brick sills. Air conditioning units punctuate the façade wall. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **202 34th Street**
PROPERTY NAME: Church, 202 34th Street
OTHER NAME (S): Angelic Church of God in Christ
CONSTRUCTION DATE: circa 1940
DHR NUMBER (S): 122-5087-0801
DESCRIPTION (S):
This is a one-story church designed in the Colonial Revival style and constructed circa 1940. It incorporates a parged brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, projecting, squared entrance bay surmounted by an asphalt-shingled, gable roof. The primary entrance is centrally located and is comprised of double-leaf, metal, paneled door surmounted by a fan-shaped transom. The church features 1/1, wood, double-hung sash windows with storm windows. There is a single-leaf, metal, paneled door surmounted by a 2-light transom on the east elevation. The east elevation entrance is accessed by wood, handicap ramp. The roof is gable clad in asphalt shingles with wide eaves and a raking cornice.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **209 34th Street**
PROPERTY NAME: Apartment Building, 209 34th Street
OTHER NAME (S): The Byrd Apartments/Colonial Apartments
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-0802
DESCRIPTION (S):
This is a two-story apartment building designed in the Colonial Revival style and constructed in 1917. It incorporates a 7-course, American bond brick foundation and structural system. The north façade is clad in common bond brick veneer. The north façade features two, two-story, one-bay porches incorporated under the main roof and flanking the central entrance. The porches feature wood, Tuscan columns resting on tall, brick piers; and plain, wood balustrades. The primary entrance is centrally located and is comprised of a single-leaf door surmounted by a transom and a brick jack arch. There are single-leaf, metal, paneled doors surmounted by brick jack arches accessing the second story porches. The single-leaf doors and transoms accessing the first story porches have been boarded. The building features 1/1, vinyl, double-hung sash windows with rowlock brick sills. The first story windows have been boarded. Foundation windows have been boarded or filled with louvered vents and punctuate the west elevation wall. The building features wood-shingled, hip-roofed dormers on the north façade, and east and west elevations. The dormers feature paired, 1/1, wood, double-hung sash windows; boxed cornices; and wide friezes. The roof is hipped clad in slate shingles with a boxed cornice and a wide frieze. The building features interior, parged brick chimneys on the east and west elevations. The east

elevation chimney features a corbelled cap. There is a two-story porch appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **223 34th Street**
PROPERTY NAME: House, 223 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1913
DHR NUMBER (S): 122-5087-0809
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1913. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a stoop and a boarded, single-leaf entrance. The windows on the first story have been boarded. The second story features 1/1, metal, double-hung sash windows. The roof is hipped clad in asphalt shingles with wide eaves. There is a hip-roofed dormer on the north façade that features paired, 4/4, wood, double-hung sash windows. The house features an interior, brick chimney with a corbelled cap on the east elevation and two, interior, brick chimneys with corbelled caps on the west elevation. There is a one-story, gable-roofed ell appended to the south elevation. The entrance and windows on the ell have been boarded.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **226 34th Street**
PROPERTY NAME: House, 226 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0810
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; square, wood columns; and a plain, wood balustrade. There is a two-story, projecting squared bay surmounted by a gable on the east end of the façade. The gable features a 1/1, metal, double-hung sash window and cornice returns. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a storm door. The house features 1/1, metal, double-hung sash windows. There is a hip-roofed dormer that features a 1/1, metal, double-hung sash window on the south façade. There is an intersecting gable that features a double-hung sash window and cornice returns on the south end of the west elevation. There is a hip-roofed dormer that features a double-hung sash window on the west elevation. There is a gable on the east elevation exhibiting cornice returns. The roof is hipped-cross-gable clad in asphalt shingles with a boxed cornice. The house features a central, interior, brick chimney with a corbelled cap. There is a one-story porch appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **229 34th Street**

PROPERTY NAME: House, 229 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0811
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and a plain, wood balustrade. The primary entrance has been boarded and is surmounted by a transom. There is a two-story, projecting, canted bay surmounted by a closed gable on the west end of the façade. The closed gable features a 1/1, wood, double-hung sash window. The windows on the façade and the first story side elevations have been boarded. The second story side elevation windows are 2/1, wood, double-hung sash. There is an intersecting, closed gable on the east elevation. The roof is hipped-cross-gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **230 34th Street**
PROPERTY NAME: House, 230 34th Street
OTHER NAME (S): Apartment Building, 230 34th Street
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0812
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation clad in rusticated stone and a wood frame structural system clad in weatherboard. The south façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; a boxed cornice; and a plain, wood, balustrade. There are three entrances on the south façade. The west entrance is comprised of a single-leaf, wood, door surmounted by a boarded transom. The central entrance is comprised of a single-leaf, wood, 3-panel door with a light surmounted by a boarded transom. The east entrance is located on the canted wall of a two-story, projecting, canted bay, and is comprised of a single-leaf, wood, paneled door with a storm door. The canted bay is surmounted by a closed gable that features a Palladian window comprised of a 1/1, wood, double-hung sash window with a rounded arch, Queen Anne upper sash flanked by fixed, wood windows. The closed gable features carved vergeboards at the roof apex; and modillions and scroll-cut brackets under the eaves. The house features 1/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting canted bay surmounted by a closed gable on the east elevation. There is a single-leaf door with a storm door on the first story canted bay accessing the wraparound porch. There is a two-story, projecting, canted bay on the west elevation. There is gable-roofed dormer on the south façade that features a Queen Anne, wood, double-hung sash window and cornice returns. There is an intersecting, closed gable on the west elevation. The roof is hipped-cross-gable-clad in asphalt shingles with modillions under the eaves. The house features an interior, parged brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **231 34th Street**
PROPERTY NAME: Duplex, 231 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-0813
DESCRIPTION (S):
This is a two-and-one-half-story duplex designed in the Queen Anne style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; and plain, wood posts and balustrade. There is a centrally located, two-story, projecting, squared bay surmounted by a closed gable on the north façade. The closed gable features a 1-light, metal window and boxed cornice. There are two entrances flanking the central, projecting bay. The entrances are comprised of single-leaf, metal, paneled, doors. The duplex features 6/6, metal, double-hung sash windows. There are hip-roofed dormers on the east and west elevations. The window on the west elevation dormer has been boarded. The roof is hipped clad in asphalt shingles with a boxed cornice. The duplex features a central, interior, parged brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **234 34th Street**
PROPERTY NAME: House, 234 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1908
DHR NUMBER (S): 122-5087-0814
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1908. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled, door. The house features 1/1, metal, double-hung sash windows. There is a closed gable that features a 6/6, wood double-hung sash window on the west end of the façade. There are shed-roofed dormers on the east and west elevations that features 6/6, wood, double-hung sash windows. The roof is hipped clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **303 34th Street**
PROPERTY NAME: Christian Temple
OTHER NAME (S):
CONSTRUCTION DATE: 1922
ARCHITECT: William H. Nicklas
DHR NUMBER (S): 122-5087-0131 122-0922

DESCRIPTION (S):
This is a large church designed in the Gothic Revival style and constructed in 1922. The building has a brick foundation and brick structural system clad in stone veneer. The main sanctuary is oriented east-west. The east elevation features a large three-story stained glass window. The window has a pointed arch form with traceried stained glass. The arch is articulated by a raised stone surround marked by carved springers. Flanking the window are stepped buttresses with pointed arch details. At the southeast corner is a five-story tower with a Gothic Revival-inspired parapet. Windows punctuate the lower elevation and an open belfry with gothic arch openings marks the top of the tower. Buttresses articulate the tower corners and have similar features to those found on the east elevation. At the base of the south elevation of the tower is a double-leaf, wood entrance with a gothic arch transom. Two projecting entrance blocks to the sanctuary mark the north elevation. The east block is three stories and features a double-leaf, wood door surmounted by a pointed arch transom. The door is surrounded by a raised stone surround. Flanking the door are two, copper light fixtures with a Gothic Revival motif. This entrance block has a gable roof with a gabled parapet. There are buttresses on the north elevation of the block. Windows punctuate the two upper stories. The west entrance block exhibits similar features, including a double-leaf door, buttresses and window. The parapet on this block is stepped with a sculpture niche and raised stone banding on the parapet. Between the two entrance blocks are five two-story, stained glass windows with Gothic Revival tracery. Stone buttresses divide the windows. Foundation windows mark the base of the north elevation below the windows with a stone watertable. The west elevation is plainer with a gabled parapet and window openings. The main roof is gable clad in slate with parapeted ends. There is an interior brick chimney on the southwest corner and an exterior chimney on the south wall near the west corner. The chimneys are clad in stone. To the south of the main sanctuary is an educational/administrative wing. This is connected to the sanctuary by a perpendicular gabled hyphen, which is set back from the east elevation. The south end of the educational/administrative wing has the same orientation as the sanctuary. This wing is brick construction clad in stone and features the same roofing material as the sanctuary. There are two interior brick chimneys piercing the roof. The windows within this block have a square form with pointed arch, stained glass windows. The windows on the south and south end of the east elevation are paired. There is a double-leaf door on the south elevation accessed by a stair.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **315 34th Street**
PROPERTY NAME: House, 315 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0817
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and turned balusters. The primary entrance is comprised of a single-leaf, wood door with a light and a storm door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting,

squared bay surmounted by a closed gable on the east end of the façade. The closed gable features a 1/1, wood, double-hung sash window with a storm window. There are intersecting gables on the east and west elevations. The roof is hipped-cross-gable clad in slate shingles. The house features a central, interior, parged brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **404 34th Street**
PROPERTY NAME: House, 404 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1929
DHR NUMBER (S): 122-5087-0826
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1929. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; square, wood columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal door with a light flanked by sidelights. The house features individual and paired, 1/1, metal, double-hung sash windows. There is a two-story, gable-roofed block appended to the east elevation. The façade gable features a wood, half-circle window and exposed outriggers. The roof is gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **406 34th Street**
PROPERTY NAME: House, 406 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-0827
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1905. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; a boxed cornice; wood, Tuscan columns; and a wrought iron balustrade. A pediment surmounts the porch entrance. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a transom and flanked by sidelights. The house features individual and tripartite, 1/1, metal, double-hung sash windows. There is a one-story, projecting, squared oriel on the second story of the west elevation. There is a projecting, squared bay on the east elevation. There is a hip-roofed dormer clad in wood shingles on the façade. The dormer features paired, 6/1, wood, double-hung sash windows with storm windows. There is a hip-roofed dormer on the west elevation. The roof is hipped clad in asphalt shingles.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1930. The garage has been parged and features an overhead, paneled door. The roof is flat.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **408 34th Street**
PROPERTY NAME: House, 408 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0829
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system. The house has been parged. The south façade features a two-story, two-bay porch incorporated under the main roof. The first story porch features wood piers resting on parged brick pedestals; a plain, wood balustrade; and a false, asphalt-shingled hipped roof. The second story porch features a parged balustrade and is enclosed with wood siding punctuated by metal, double-hung sash windows. The primary entrance is comprised of a single-leaf door with a storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows and 6-light, casement windows. There is a gable-roofed dormer on the façade that features paired, 1/1, wood, double-hung sash windows and exposed, wood rafters under the eaves. The roof is side gable clad in asphalt shingles. There is a one-story, shed-roofed ell clad in aluminum siding appended to the north elevation. The house features an interior, brick chimney on the east elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1930. It incorporates a wood frame structural system clad in vertical board. The garage features a double-leaf wood door. The garage features a metal shed roof.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **410 34th Street**
PROPERTY NAME: House, 410 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0830
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The south façade features a two-story, two-bay porch incorporated under the main roof. The first story porch has been screened and features wood piers resting on parged brick pedestals; a plain, wood balustrade; and a false, composite tiled roof with exposed rafters. The second story porch features a wood-shingled balustrade and is enclosed with wood siding punctuated by 6-light, casement windows. The first story porch is accessed by a single-leaf, metal screen door. The house features 1/1, wood, double-hung sash windows with storm windows and 6-light, casement windows. There is a gable-roofed dormer on the façade that features paired, 1/1, wood, double-hung sash windows and exposed, wood rafters under the eaves. The roof is side gable clad in asphalt shingles with exposed, wood rafters. The house features an interior, brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **411 34th Street**
PROPERTY NAME: House, 411 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0831
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; a wide frieze; and turned balusters. The porch has been screened and is accessed by a single-leaf, metal screen door. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a wrought iron storm door surmounted by a transom. The house features 6/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the facade windows. There is a closed, intersecting gable on the façade that features paired, 1/1, wood, double-hung sash windows. There is a closed, intersecting gable on the west elevation. The roof is hipped clad in asphalt shingles. The house features two interior, brick chimneys with corbelled caps on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **412 34th Street**
PROPERTY NAME: House, 412 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-0832
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1915. It incorporates a 6-course, American bond brick foundation and structural system. The south façade features a one-story, three-bay porch with a central entrance; an asphalt-shingled, hipped roof; brick piers; and a wood balustrade. The primary entrance is centrally located and is comprised of a single-leaf door with a wrought iron storm door flanked by Queen Anne sidelights and surmounted by a Queen Anne transom. The house features individual and tripartite, wood, Queen Anne, double-hung sash windows. There are hip-roofed dormers on the façade and the east and west elevations. The dormers features tripartite, wood, Queen Anne, double-hung sash windows and are clad in vinyl siding. There is a single-leaf door surmounted by a hip-roofed overhang with brackets on the west elevation. The roof is hipped clad in asphalt shingles and wide eaves. The house features an interior, brick chimney on the east elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in asbestos siding. The garage features a wood, paneled, sliding door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **415 34th Street**
PROPERTY NAME: House, 415 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0833
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; and wrought iron posts and balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. The façade gable is clad in fishscale-cut wood shingles and features a Palladian window of a 1/1, double-hung sash window with a rounded arch upper sash flanked by wood, Queen Anne, casement windows. There are intersecting gables on the east and west elevations. The roof is gable clad in asphalt shingles with a boxed cornice and cornice returns. The house features a central, interior, brick chimney with a corbelled cap. There is a one-story porch incorporated under the main roof on the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **418 34th Street**
PROPERTY NAME: House, 418 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-0834
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; a wide frieze; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light. The house features individual and paired, 1/1, metal, double-hung sash windows. There is a hip-roofed oriel on the first story of the west elevation. The façade features a closed, Jerkinhead-gable with a 2/2, wood, double-hung sash window. There is a closed gable on the west elevation. There is a two-story, projecting, canted bay on the east elevation. There is a hip-roofed dormer on the east elevation. The roof is Jerkinhead-gable clad in asphalt shingles. The house features an interior, brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **419 34th Street**
PROPERTY NAME: House, 419 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-0835

DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1915. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, three-bay porch with paneled, wood piers; a wide frieze; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door surmounted by a transom. There is a one-story, projecting, canted bay surmounted by a closed gable on the east end of the second story façade. The closed gable is clad in fishscale-cut wood shingles and features a 6/6, metal, double-hung sash window. The house features individual and paired, 6/6, metal, double-hung sash windows with storm windows. There is a tripartite window of a fixed, single-leaf wood window flanked by 6/6, wood double-hung sash windows on the east end of the first story façade. There is a hip-roofed dormer on the north façade that is clad in wood shingles and features a 6/6, metal, double-hung sash window. There is a hip-roofed dormer on the west elevation. There is a two-story, projecting bay surmounted by a closed gable on the east elevation. The first story of the bay is canted and the second story is squared. The roof is hipped clad in asphalt-shingle with wide eaves.

- This is a one-story shed designed in the Late 19th and Early 20th Century American Movement and constructed circa 1920. It incorporates a wood frame structural system clad in aluminum siding. The shed features a single-leaf door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **420 34th Street**
PROPERTY NAME: House, 420 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-0836
DESCRIPTION (S):
This is a two-story house designed in a Craftsman-Queen Anne hybrid style and constructed in 1915. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, paneled piers; and a plain, wood balustrade. The wood rafters are exposed under the eaves on the southwest corner of the porch. The primary entrance is comprised of a single-leaf, wood, paneled door surmounted by a transom and flanked by Queen Anne-lights and paneled sidelights. The house features 1/1, 2/2, and Queen Anne, wood, double-hung sash windows. There is a shallow, canted bay on the second story façade. There is a two-story, projecting, canted bay on the west elevation. There is a hip-roofed oriel on the first story of the east elevation. There are hip-roofed dormers on the façade and the west elevation that feature paired, double-hung sash windows and exposed, wood rafters under the eaves. There is a closed, intersecting gable on the east elevation. The roof is hipped clad in slate shingles with exposed wood rafters under the eaves. The house features an interior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **421 34th Street**

PROPERTY NAME: House, 421 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0837
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Doric columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, gable-roofed block on the west end of the facade. The first story of the projecting block is canted and the second story is squared. A closed gable clad in fishscale-cut wood shingles surmounts the block. The closed gable features a 1/1, wood, double-hung sash window. There is a closed, intersecting gable on the west elevation. The roof is hipped clad in asphalt shingles with a boxed cornice. The house features an interior, brick chimney with a cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **423 34th Street**
PROPERTY NAME: House, 423 34th Street
OTHER NAME (S): Apartment Building, 423 34th Street
CONSTRUCTION DATE: 1908
DHR NUMBER (S): 122-5087-0838
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1908. It incorporates a parged brick foundation and a wood frame structural system. The façade is clad in vertically hung wood siding and the side elevations are clad in asbestos siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; wood posts; and a wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door. The house features 1/1, metal, double-hung sash windows. There is a one-story, projecting, canted bay surmounted by a closed gable on east end of the second story facade. The closed gable features a 1/1, wood, double-hung sash window. There is a hip-roofed dormer on the façade that features a 1/1, double-hung sash window. There is a two-story, projecting, canted bay surmounted by a closed gable on the east elevation. The closed gable features a double-hung sash window. There is a closed, intersecting gable on the west elevation. The roof is hipped clad in asphalt shingles with a boxed cornice and a wide frieze. There is a one-story porch appended to the south elevation. This house has been converted into an apartment building.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **424 34th Street**
PROPERTY NAME: Apartment Building, 424 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1988

DHR NUMBER (S): 122-5087-0839
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1988. It incorporates a concrete block foundation and a wood frame structural system. The façade is clad in brick veneer and the side elevations are clad in vinyl siding. The south façade features five entrances on the first story and two entrances on the second story. The entrances are comprised of single-leaf, metal paneled doors. Some of the doors feature storm doors. The second story entrances are accessed by a wood stair appended to the west end of the façade. The second story entrances are surmounted by a vinyl-clad, intersecting, gable-roofed porch. The building features 6/6, metal, double-hung sash windows with rowlock brick sills. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **427 34th Street**
PROPERTY NAME: House, 427 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0840
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1906. It incorporates a brick foundation and a wood frame structural system clad in weatherboard. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood posts; a scroll-cut frieze; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a storm door surmounted by a boarded transom. The house features 1/1, metal, double-hung sash windows. There is a two-story, projecting, squared block on the west end of the façade. A closed gable clad in fishscale-cut wood shingles surmounts the block. The closed gable features a 1/1, wood, double-hung sash window. There is a closed, intersecting gable on the east elevation. There is a two-story, projecting, canted bay surmounted by a closed gable on the west elevation. The closed gable is clad in fishscale-cut wood shingles and features a 1/1, wood, double-hung sash window. The roof is hipped clad in asphalt shingles with a boxed cornice and a wide frieze.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **428 34th Street**
PROPERTY NAME: House, 428 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0841
DESCRIPTION (S):
This is a two-story Bungalow constructed in 1918. It incorporates a brick foundation and a wood frame structural system. The first story is clad in asbestos siding and the second story is clad in vinyl siding. The south façade features a one-story porch incorporated under the main roof. The porch features a cross-gable roof

with brackets under the rakes; paneled, squat, battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood door with eight lights and a storm door flanked by 4-light and wood paneled sidelights. The house features 1/1, metal, double-hung sash windows. The first story façade features a fixed, multiple light, wood window with a storm window. There are vinyl-clad, shed-roofed dormers on the façade and north elevation. There is a shed-roofed dormer surmounting the second-story, shed-roofed dormer on the façade. The roof is side gable clad in asphalt shingles. The house features an interior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **434 34th Street**
PROPERTY NAME: House, 434 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0843
DESCRIPTION (S):
This is a two-story Bungalow constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story porch incorporated under the main roof. The porch features battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal door. The house features individual and paired, 1/1, metal, double-hung sash windows. There are vinyl-clad, shed-roofed dormers on the façade and north elevation. There is a shed-roofed dormer that features a 6-light, wood, fixed window surmounting the second-story, shed-roofed dormer on the façade. The roof is side gable clad in asphalt shingles. The house features an exterior, brick chimney on the west elevation.

- There is a one-story shed designed in the Modern Movement style and constructed circa 1990. It incorporates a wood frame structural system clad in vinyl siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **436 34th Street**
PROPERTY NAME: House, 436 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-0844
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof. The porch is currently undergoing renovation. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a transom. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the

façade. The closed gable is clad in fishscale-cut wood shingles and features a Palladian window of a 1/1, wood double-hung sash window with a rounded arch upper sash flanked by one-light, fixed, wood windows. The house features 1/1, metal, double-hung sash windows. There is a hip-roofed dormer on the façade that is clad in diagonal wood siding and features a 1/1, metal, double-hung sash window. There is a hip-roofed dormer clad in diagonal wood siding on the east elevation. There is an intersecting, closed gable on the west elevation. The roof is hipped clad in asphalt shingles with wide eaves. The house features two interior, brick chimneys with corbelled caps on the east elevation.

- There is a one-story shed designed in the Modern Movement style and constructed circa 1990. It incorporates a wood frame structural system clad in vinyl siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **440 34th Street**
PROPERTY NAME: House, 440 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0845
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a boxed cornice; a wide frieze; wood, Tuscan columns; and plain, wood balustrade. The porch entrance is a surmounted by a pediment. The primary entrance is comprised of a single-leaf door with a 12-light storm door surmounted by a 7-light transom and flanked by 7-light sidelights. The house features individual and paired, 1/1, metal, double-hung sash windows. There is a hip-roofed oriel that features a tripartite window on the first story of the west elevation. There is a hip-roofed oriel that features paired windows on the first story of the east elevation. There are hip-roofed dormers that features paired, 1/1, metal, double-hung sash windows on the façade and the east and west elevations. The roof is hipped clad in asphalt shingles. The house features an interior, brick chimney on the west elevation.

- There is a one-story garage designed in the Modern Movement style and constructed circa 1990. It incorporates a wood frame structural system clad in vinyl siding. The roof is hipped clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **500 34th Street**
PROPERTY NAME: Park Place Methodist Church
OTHER NAME (S): Park Place Methodist Episcopal Church

CONSTRUCTION DATE: 1949
DHR NUMBER (S): 122-5087-0132 122-0109
DESCRIPTION (S):
This is a two-and-one-half story church designed in the Greek Revival style and constructed in 1949. The building rests on an elevated 4-course American bond brick foundation. The building is 4-course American bond brick construction clad in brick veneer. It is comprised of two blocks; a sanctuary located at the south end and an educational/administrative wing to the north. A monumental portico with stone Corinthian columns supporting a stone pediment and full entablature marks the south façade. The entablature features a modillion cornice and the pediment features a raking cornice with modillions and a circular light with traceried lights and articulated surround. The columns rest on squat brick pedestals. The main south entrance is comprised of a double-leaf wood door surmounted by a pediment. The south, east and west walls are marked by two-story, rounded arch stained glass windows divided by Corinthian pilasters. The windows have stone sills, rowlock-brick surrounds and articulated, scrolled keystones. The pilasters rest on the stone watertable above the raised foundation. The roof is deck-on hip clad in slate shingles. There is a cupola on the deck roof with a cross mounted on the copper dome. The four-sided cupola features rounded arch vents with articulated keystones. The educational/administrative wing to the north features similar articulation to the main building including, pilasters, watertable, entablature, and construction materials. The windows on this block are one story. The first story windows are 6/6, wood, double-hung sash. The second story windows are 6/6, wood, double-hung sash with rounded arch upper sashes. The second story window features rowlock brick surrounds with articulated, stone keystones and springers. Windows punctuate the foundation below the windows found on the first and second stories. The roof is hipped clad in slate shingles. Entrances are found on the foundation level on the north elevation.

- This church school is concrete block construction clad in brick veneer and follows the Late 19th and Early 20th century American Movement style of the primary resource. Constructed in 1924, this building has two blocks similar to the adjacent church. The church and school are connected by two hyphens. The south end of the building is two story and feature an engaged portico. The portico features engaged Corinthian columns supporting a pediment. The portico has three bays and similar features to the adjacent building's portico. There is a two-story stained glass window centrally located on the south elevation with a rounded arch and articulated keystone. The flanking two bays have paired windows with a common sill on each story. There are foundation windows below each portico bay. The west elevation window openings are boarded. The north block of the building is four stories. It features a centrally located entrance on the ground story. There is a stone watertable, which is broken by the entrance. The watertable serves as the foundation window lintels. The north elevation has seven bays. The three central bays feature window openings on the second through fourth stories. The east and west end bays have similar features. The bays adjacent to the end bays have brick panels on the ground story and large brick panels two-stories in height on the second and third stories. There are two stone stringcourses on the north elevation; one serves as the common lintel for the fourth story windows and the other is located above the fourth story windows. The northwest and northeast corners of the north elevation feature brick quoins. The parapet on the north elevation is crenellated and coped in

stone. The roof is flat. Windows on this block are 6/6, wood, double-hung sash. The west elevation windows are boarded on the first story. There are two brick chimneys imbedded in the walls.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **514 34th Street**
PROPERTY NAME: House, 514 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0846
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; a wide frieze; wood, Tuscan columns; and plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood door with a wrought iron storm door surmounted by a transom and flanked by 5-light sidelights. The house features 1/1, metal, double-hung sash windows. There is a single-leaf entrance on the first story of the west elevation. There is a two-story, projecting, canted bay surmounted by a closed gable on the east elevation. There are hip-roofed dormers that feature paired, 1/1, wood, double-hung sash windows on the façade and the west elevation. The roof is hipped clad in asphalt shingles. The house features an interior, brick chimney with a corbelled cap on the east elevation. There is a one-story porch appended to the north elevation.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1960. It incorporates a wood frame structural system clad in wood siding and a shed roof.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **516 34th Street**
PROPERTY NAME: House, 516 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-0847
DESCRIPTION (S):
This is a two-story Bungalow constructed in 1921. It incorporates a parged brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a two-story, two-bay porch incorporated under the main roof. The porch features clustered, wood piers resting on aluminum-clad balustrades. The primary entrance is comprised of a single-leaf door with a wrought iron storm door. There is a single-leaf door with a storm door accessing the second story porch. The house features individual and paired, 9/1, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles with brackets under the rakes. There is a shed-roofed dormer on the north elevation. The house features an interior, brick chimney on the west elevation.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **532 34th Street**
PROPERTY NAME: House, 532 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1932
DHR NUMBER (S): 122-5087-0851
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1932. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a stoop with a single-leaf, wood, paneled door with six lights and a storm door surmounted by a gable-roofed overhang supported by wood brackets. There is a porch incorporated under the main roof on the southeast corner. The porch features square, wood, columns; and a wrought iron balustrade. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. A metal awning surmounts the paired windows on the façade. The roof is gable clad in asphalt shingles. The house features an exterior brick chimney on the north elevation. There is a one-story, shed-roofed ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **604 34th Street**
PROPERTY NAME: House, 604 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-0857
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1921. It incorporates a brick foundation and a wood frame structural system. The first story is clad in vinyl siding and the second story is clad in wood shingles. The south façade features a one-story, one-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and turned balusters. The porch foundation extends across the façade and is open on the west end and features a balustrade with turned balusters. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a 12-light transom and flanked by 14-light sidelights. The house features individual, paired, and tripartite, 6/1, wood, double-hung sash windows with storm windows. There are hip-roofed dormers on the façade and the east and west elevations that feature paired, wood, diamond-paned, casement windows and exposed, wood rafters under the eaves. The roof is hipped clad in asphalt shingles. The house features an exterior, brick chimney with a corbelled cap on the east elevation. There is a two-story, shed-roofed addition appended to the north elevation. The second story of the ell features a porch.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1990. It incorporates a wood frame structural system clad in vinyl siding. The roof is hipped clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **615 34th Street**
PROPERTY NAME: House, 615 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0862
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a two-story, one-bay porch under a shed roof. The first-story porch features aluminum-clad piers and balustrade; and a false, asphalt-shingled, hipped roof. The second-story porch has been enclosed and is clad in aluminum siding punctuated by metal, sliding windows. The primary entrance is comprised of a single-leaf, wood, multiple-light door with a storm door surmounted by a 5-light transom and flanked by 5-light sidelights. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a hip-roofed dormer on the north façade that features paired, 1/1, metal, double-hung sash windows and wide eaves. The roof is hipped-cross-gable clad in asphalt shingles with wide eaves. The gables are located on the east and west elevations. There is a one-story, shed-roofed ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **622 34th Street**
PROPERTY NAME: House, 622 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-0864
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; wood, turned posts; and turned balusters. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a storm door. The house features 1/1, metal, double-hung sash windows. There is a two-story, projecting, squared block surmounted by an intersecting gable on the west end of the façade. The intersecting gable features a fixed, wood window and cornice returns. The roof is cross-gable clad in asphalt shingles with a boxed cornice and cornice returns.

- This building is a one-story garage designed in the Modern Movement style constructed circa 1995. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, paneled, roll-up door. The roof is gable clad in asphalt shingles with cornice returns.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **623 34th Street**

PROPERTY NAME: House, 623 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0865
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Bungalow style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, wraparound porch with an asphalt-shingled, hipped and gable roof; battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The east end of the wraparound porch is incorporated under an extension of the main roof. The primary entrance is centrally located and is comprised of a single-leaf, wood door flanked with sidelights. The house features 1/1, wood, double-hung sash windows with storm windows. There are shed-roofed dormers that feature paired, metal, double-hung sash windows on the east and west elevations. The façade gable features a double-hung sash window and a metal, louvered vent at the roof apex. The roof is gable clad in asphalt shingles with exposed, wood rafters. The house features an interior, brick chimney on the east elevation. There is a one-story porch appended to the south elevation.

- This building is a one-story shed designed in the Late 19th and Early 20th Century American Movement and constructed circa 1920. It incorporates a wood frame structural system clad in aluminum siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **625 34th Street**
PROPERTY NAME: House, 625 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0866
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with four lights and a storm door. The house features 1/1, metal, double-hung sash windows. There is a hip-roofed dormer that features a paired, metal, double-hung sash window on the façade. The roof is hipped clad in asphalt shingles with a boxed cornice. The house features an interior, brick chimney with a corbelled cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **626 34th Street**
PROPERTY NAME: House, 626 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1998
DHR NUMBER (S): 122-5087-0867

DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1998. It is designed to resemble a Queen Anne-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The south façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; square, wood posts; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door. The house features 6/6, metal, double-hung sash windows. There is a two-story, projecting, squared block surmounted by a closed gable on the east end of the façade. The closed gable is clad in aluminum siding. The first story of the block features a tripartite window of a 6/9, metal, double-hung sash windows flanked by 4/6, metal, double-hung sash windows. The second story of the block features a tripartite window of a 6/6, metal, double-hung sash window flanked by 4/4, metal, double-hung sash windows. The facade gable is closed and is clad in aluminum siding. The roof is gable clad in asphalt shingles.

- This building is a one-story garage designed in the Modern Movement style constructed in 1998. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, paneled, roll-up door. The roof is gable clad in asphalt shingles.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **627 34th Street**
PROPERTY NAME: House, 627 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0868
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a two-story porch with an asphalt-shingle, hipped roof. The first-story porch features wood piers resting on brick pedestals; and a wrought iron balustrade. The second-story porch has been enclosed and is clad in vinyl siding punctuated by 1/1, vinyl, double-hung sash windows. The primary entrance is comprised of a single-leaf, wood door with a stained glass light and a storm door surmounted by a transom. The house features individual and tripartite, 1/1, vinyl, double-hung sash windows. There is a hip-roofed dormer on the north façade. The roof is hipped-cross-gable clad in asphalt shingles with wide eaves. There are intersecting gables on the east and west elevations.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **630 34th Street**
PROPERTY NAME: Apartment Building, 630 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: circa 1915
DHR NUMBER (S): 122-5087-0869
DESCRIPTION (S):
This is a three-story apartment building designed in the Late 19th and Early 20th Century American Movement

style and constructed circa 1915. It incorporates a parged brick foundation and brick structural system. The south façade is clad in brick veneer. The south façade features two, three-story, one-bay porches sheltered under a common, hipped roof. The porches feature battered, wood piers resting on tall, brick pedestals; and a plain, wood balustrades. There is a three-story, projecting, brick, squared block centrally located on the façade between the porches. The block features the primary entrance on the first story. The primary entrance is comprised of a single-leaf door with a fan-shaped light surmounted by a multiple light transom. There are single-leaf doors surmounted by transoms accessing each of the porches. The building features individual and paired, 6/6, metal, double-hung sash windows with rowlock brick sills. The roof is flat with a stepped parapet on the side elevations. The parapet is coped in a rowlock brick course.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **634 34th Street**
PROPERTY NAME: Apartment Building, 634 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1998
DHR NUMBER (S): 122-5087-0871
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1998. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system. The south façade is clad in brick veneer and the side elevations are clad in vinyl siding. The south façade features four entrances comprised of single-leaf, metal, paneled doors. There is a wood stair accessing the second story entrances. The second story entrances are sheltered by an extension of the main roof. The building features individual and paired, 6/6, metal, double-hung sash windows with rowlock brick sills and flanked by non-functional shutters. Air conditioning units punctuate the façade wall. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **635 34th Street**
PROPERTY NAME: House, 635 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1903
DHR NUMBER (S): 122-5087-0872
DESCRIPTION (S):
This is a two-and-one-half story house designed in the Queen Anne style and constructed in 1903. It incorporates a parged brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a wide frieze; fluted, vinyl-clad columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door surmounted by a transom. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable features a tripartite window of a 1/1, wood, double-hung sash window flanked by fixed, wood windows. The house features wood, Queen Anne, double-hung sash windows with

storm windows. There is a single-leaf, metal, paneled door on the west elevation. There is a one-story, projecting, squared bay surmounted by a shed roof on the first story of the west elevation. The roof is hipped-cross-gable clad in asphalt shingles. There are intersecting gables that feature wood, Queen Anne, double-hung sash windows on the east and west elevations. The house features an interior, brick chimney with a corbelled cap on the east elevation. There is a one-story, shed-roofed ell appended to the south end of the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **640 34th Street**
PROPERTY NAME: House, 640 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-0873
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a wide frieze; wood, Tuscan columns; and turned balusters. The primary entrance is comprised of a single-leaf, wood door with two lights and a wrought iron storm door surmounted by a transom. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable features a wood, Queen Anne, double-hung sash window. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is hipped-cross-gable clad in slate shingles. There are intersecting gables that feature wood, Queen Anne, double-hung sash windows on the east and west elevations. The house features an interior, brick chimney with a corbelled cap on the east elevation and a central, interior, parged, brick chimney.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1940. It incorporates a metal frame structural system clad in corrugated metal. The garage features three, double-leaf, corrugated metal doors. The roof is shed clad in corrugated metal.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **641 34th Street**
PROPERTY NAME: House, 641 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0874
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story porch incorporated under the main roof. The porch features battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. There is an oversized, hip-roofed dormer on the façade. The dormer features an enclosed porch clad in vinyl siding that is punctuated by metal, 6-

light windows. The roof is side gable clad in asphalt shingles with exposed, wood rafters under the eaves and brackets under the rakes. The house features an interior, brick chimney with a metal chimney pot on the west elevation. There is a one-story, gable-roofed ell appended to the south elevation.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1960. It incorporates a wood frame structural system clad in aluminum siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **642 34th Street**
PROPERTY NAME: House, 642 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0875
DESCRIPTION (S):
This is a one-story house designed in the Late 19th and Early 20th Century American Movement style constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features an enclosed porch with a hipped roof. The porch is clad in vinyl siding punctuated by Jalousie windows and features a metal awning. The porch is accessed by a metal storm door. The house features 6/1, wood, double-hung sash windows with storm windows surmounted by metal awnings. The roof is gable clad in standing-seam metal. The house features an interior, parged brick chimney on the west elevation. There is a single-leaf door with a wrought iron storm door surmounted by an overhang and accessed by concrete stairs on the west elevation.

- This is a one-story shed designed in the Modern Movement and constructed circa 1945. It incorporates a wood frame structural system clad in aluminum siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **643 34th Street**
PROPERTY NAME: House, 643 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0876
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; square, wood columns resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a fan-shaped light and a wrought iron storm door surmounted by a transom and flanked by aluminum clad sidelights. The house features 1/1 and 9/1, wood, double-hung sash windows with storm windows. There is a

hip-roofed dormer that features a paired, double-hung sash window on the façade. The roof is hipped clad in asphalt shingles with a boxed cornice. The house features an interior, parged brick chimney with a corbelled cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **645 34th Street**
PROPERTY NAME: House, 645 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0877
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a parged brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with a shed roof extending from the main roof. The porch features battered, wood piers resting on parged brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, 18-light door with a wrought iron storm door surmounted by a 5-light transom and flanked by 6-light sidelights. The house features individual and paired, 1/1 and 2/1, wood, double-hung sash windows with storm windows. There is an oversized, gable-roofed dormer on the west end of the façade. The roof is side gable clad in asphalt shingles with brackets under the rakes. There is a shed-roofed dormer on the south elevation. There is a secondary entrance on the west elevation. The entrance is comprised of a single-leaf door with a light surmounted by a shallow-porch featuring a pediment supported by wood, Tuscan columns resting on brick pedestals. The house features an interior, brick chimney with a corbelled cap on the west elevation. There is a one-story, gable-roofed ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **700 34th Street**
PROPERTY NAME: House, 700 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0881
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; and battered, wood piers resting on brick pedestals. The primary entrance is comprised of a single-leaf, wood, paneled door with a storm door flanked by sidelights. The house features 6/1 and 8/1, wood, double-hung sash windows with storm windows. There is a single-leaf, metal, paneled door on the west elevation. There is a one-story, projecting, canted bay on the first story of the east elevation. There are hip-roofed dormers that feature paired, 6/1, wood, double-hung sash windows on the façade and the west elevation. The roof is hipped clad in slate shingles with a wide frieze.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **703 34th Street**
PROPERTY NAME: House, 703 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1997
DHR NUMBER (S): 122-5087-0882
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1997. It is designed to resemble a Queen Anne-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, shed roof; wood, turned posts; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door flanked on the west by a sidelight. There is a two-story, projecting, squared block surmounted by gable on the west end of the façade. The gable features cornice returns. The house features 1/1, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles and the gables on the east and west elevations are closed by a wide wood stringcourse.

- This is a one-story garage designed in the Modern Movement style constructed circa 1997. It incorporates a wood frame structural system clad in vinyl siding. The roof is side gable clad in asphalt shingles.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **706 34th Street**
PROPERTY NAME: House, 706 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0883
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system. The first story is clad in common bond brick veneer and the second story is clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; square, wood columns resting on brick pedestals; and turned balusters. The primary entrance is comprised of a single-leaf door with a storm door. The house features 9/1, wood, double-hung sash windows with storm windows. There are six-light, wood, casement windows on the second-story of the west elevation. There is a single-leaf door with a storm door on the west elevation. There is a one-story, projecting, squared oriel on the first story of the east elevation. There is a hip-roofed dormer that features paired, 9/1, wood, double-hung sash windows on the façade. The roof is hipped clad in asphalt shingles with wide eaves. The house features exterior, brick chimneys with corbelled caps on the east and west elevations. There is a one-story, vinyl-clad ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **707 34th Street**
PROPERTY NAME: House, 707 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1999
DHR NUMBER (S): 122-5087-0884
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1999. It is designed to resemble a Queen Anne-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; wood, turned posts; and a plain, wood balustrade. The primary entrance is centrally located and is comprised of a single-leaf, metal, paneled door with a storm door. There is a two-story, projecting, canted bay surmounted by a closed gable on the west end of the façade. The closed gable is clad in vinyl siding laid in a sunburst motif. The house features 6/6 and 9/9, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles.

- This is a one-story garage designed in the Modern Movement style and constructed in 1999. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, paneled, roll-up door. The roof is gable clad in asphalt shingles.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **710 34th Street**
PROPERTY NAME: House, 710 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1996
DHR NUMBER (S): 122-5087-0885
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1996. It is designed to resemble a Craftsman-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with a shed roof extending from the main roof. The porch features battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door. The house features individual and paired, 6/6, metal, double-hung sash windows. There is an oversized, shed-roofed dormer on the façade. The roof is side gable clad in asphalt shingles.

- This is a one-story garage designed in the Modern Movement style constructed circa 1996. It incorporates a wood frame structural system clad in vinyl siding. The roof is gable clad in asphalt shingles.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **711 34th Street**
PROPERTY NAME: House, 711 34th Street

OTHER NAME (S):
CONSTRUCTION DATE: 1997
DHR NUMBER (S): 122-5087-0886
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1997. It is designed to resemble a Queen Anne-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, shed roof; wood, turned posts; turned balusters; and a spindlefrieze. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light. The house features 6/6 and 9/9, metal, double-hung sash windows. The façade gable is clad in fishscale-cut, vinyl siding. The roof is gable clad in asphalt shingles. There is a one-story ell appended to the south elevation.

- This is a one-story shed designed in the Modern Movement style and constructed in 1997. It incorporates a wood frame structural system clad in vinyl siding. The shed features a single-leaf, metal, paneled door. The roof is gable clad in asphalt shingles.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **713 34th Street**
PROPERTY NAME: House, 713 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-0887
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door flanked on the east by a sidelight. The house features individual and paired, 1/1, metal, double-hung sash windows. There is an oversized, hip-roofed dormer on the façade. There is a shed-roofed dormer on the south elevation. The roof is side gable clad in asphalt shingles with brackets under the rakes. There is a one-story ell appended to the south elevation.

- This is a one-story garage designed in the Modern Movement style constructed circa 1995. It incorporates a wood frame structural system clad in vinyl siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **718 34th Street**
PROPERTY NAME: House, 718 34th Street
OTHER NAME (S):

CONSTRUCTION DATE: 1995
DHR NUMBER (S): 122-5087-0888
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1995. It is designed to resemble a Queen Anne-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; square, wood posts; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door. There is a two-story, projecting, squared bay surmounted by a gable on the east end of the façade. The gable features cornice returns. The house features 6/6 and 9/9, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles with cornice returns. There is a one-story, shed-roofed ell appended to the north elevation.

- This is a one-story garage designed in the Modern Movement style and constructed in 1995. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, paneled, roll-up door. The roof is gable clad in asphalt shingles.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **719 34th Street**
PROPERTY NAME: House, 719 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1908
DHR NUMBER (S): 122-5087-0889
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1908. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; fluted, wood, Doric columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door flanked by sidelights. Wrought iron has been applied over the sidelights. The house features individual and paired, 1/1, metal, double-hung sash windows. There is a wood, diamond-paned window on the first story of the west elevation. There is a one-story, projecting, squared oriel supported by carved brackets on the west elevation. There is a hip-roofed dormer that features paired, 1/1, metal, double-hung sash windows on the façade. The roof is hipped clad in asphalt shingles.

- This is a one-story garage designed in the Late 19th and early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in asbestos siding. The roof is clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **723 34th Street**
PROPERTY NAME: House, 723 34th Street
OTHER NAME (S):

CONSTRUCTION DATE: 1954
DHR NUMBER (S): 122-5087-0890
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1954. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, four-bay porch with an asphalt-shingled, hipped roof; wrought iron posts resting on brick pedestals; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf door. There is a one-story, projecting, gable-roofed block on the east end of the façade. The house features individual and paired, 2/2, wood, double-hung sash windows with storm windows flanked by non-functional shutters. There is an intersecting gable block appended to the south end of the west elevation. The roof is gable clad in asphalt shingles. The façade gable features a half-circle, louvered vent at the roof apex. The house features an exterior, brick chimney on the west elevation.

- This is a one-story garage designed in the Modern Movement and constructed circa 1954. It incorporates a wood frame structural system clad in corrugated metal.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **724 34th Street**
PROPERTY NAME: House, 724 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1995
DHR NUMBER (S): 122-5087-0891
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1995. It is designed to resemble a Queen Anne-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; wood, turned posts; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door flanked on the east by a sidelight. There is a two-story, projecting, squared block surmounted by a closed gable on the east end of the façade. The closed gable is clad in fishscale-cut vinyl siding. The house features 2/1, metal, double-hung sash windows. The roof is cross-gable clad in asphalt shingles with cornice returns on the west gable.

- This is a one-story shed designed in the Modern Movement style and constructed in 1995. It incorporates a wood frame structural system clad in vinyl siding. The garage features a single-leaf, metal, paneled door. The roof is gable clad in asphalt shingles.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **725 34th Street**
PROPERTY NAME: House, 725 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1922

DHR NUMBER (S): 122-5087-0892
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1922. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features two-story porch. The first-story porch features brick piers and a wood, lattice balustrade. The second-story porch is three bays and features clustered, wood posts; an aluminum-clad balustrade; and a hipped roof. The primary entrance is comprised of a single-leaf door with a wrought iron storm door surmounted by a transom. There is a single-leaf door with a storm door accessing the second story porch. The house features individual and tripartite, 1/1, metal, double-hung sash windows. Non-functional shutters flank the first story façade windows. The roof is side gable with brackets under the rakes.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **727 34th Street**
PROPERTY NAME: House, 727 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-0893
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1921. It incorporates a brick foundation and a wood frame structural system clad in weatherboard. The north façade features a one-story porch incorporated under the main roof with brick piers and a turned, wood balustrade. There is an oversized, gable-roofed dormer on the façade. The dormer features brackets under the rakes and is punctuated by 6/1, wood, double-hung sash windows with storm windows. There is a wood frieze above the windows and a wood stringcourse forming the window sills. The façade gable is clad in wood shingles. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a transom. The house features 6/1 and Queen Anne, wood, double hung sash windows with storm windows. The roof is side gable clad in asphalt shingles with brackets under the rakes. The house features an interior, parged brick chimney. There is a porch incorporated under the main roof on the south elevation.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1990. It incorporates a wood frame structural system clad in vinyl siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **728 34th Street**
PROPERTY NAME: House, 728 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1995
DHR NUMBER (S): 122-5087-0894
DESCRIPTION (S):

This is a two-story house designed in the Modern Movement style and constructed in 1995. It is designed to resemble a Queen Anne-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; square, wood posts; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door flanked on the east by a 3-light sidelight. There is a two-story, projecting, squared bay surmounted by a gable on the west end of the façade. The gable features cornice returns. The house features 6/6 and 9/9, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles with cornice returns. There is a one-story, shed-roofed ell appended to the north elevation.

- This is a one-story garage designed in the Modern Movement style and constructed in 1995. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, paneled, roll-up door. The roof is gable clad in asphalt shingles.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **731 34th Street**
PROPERTY NAME: House, 731 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-0895
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1922. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features clustered, wood piers resting on brick pedestals; and turned balusters. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a transom and flanked by sidelights. The house features 1/1, metal, double-hung sash windows with storm windows. There is a tripartite windows of 12/1 and 9/1, wood, double-hung sash windows with storm windows on the first story facade. There is an oversized, hip-roofed dormer that features paired, 1/1, wood double-hung sash windows on the façade. There is a one-story, projecting, canted bay on the west elevation. The roof is side gable clad in asphalt shingles. There is a porch incorporated under the main roof on the south elevation.

- This is a one-story garage designed in the Modern Movement style constructed circa 1945. It features a metal roof.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **733 34th Street**
PROPERTY NAME: House, 733 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 2004
DHR NUMBER (S): 122-5087-1024
DESCRIPTION (S):

This is a two-story house designed in the Modern Movement and constructed in 2004. It is designed to resemble a Colonial Revival style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof. The primary entrance is comprised of a single-leaf, metal, paneled door flanked on the east by a 3-light sidelight. The house features 6/6, metal, double-hung sash windows. There is a two-story, projecting, squared bay on the east end of the façade that is surmounted by an intersecting gable. The roof is side gable clad in asphalt shingles. There is a two-story, side gable-roofed garage addition appended to the west elevation and setback from the façade. This house is currently under construction.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **734 34th Street**
PROPERTY NAME: House, 734 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: circa 1920
DHR NUMBER (S): 122-5087-0896
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed circa 1920. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; battered, wood piers resting on brick pedestals; and turned balusters. The primary entrance is comprised of a single-leaf door with a wrought iron storm door surmounted by a transom and flanked by sidelights. The house features 1/1, wood, double-hung sash windows with storm windows. There is a hip-roofed dormer that features paired, 1/1, wood, double-hung sash windows on the façade. The roof is hipped clad in asphalt shingles with wide eaves. The building features an interior, brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **735 34th Street**
PROPERTY NAME: House, 735 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0897
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story porch incorporated under the main roof with battered, wood piers resting on brick pedestals. The west end of the porch has been enclosed and features 9/9, wood, double-hung sash windows; and a single-leaf door with a storm door. There is a second story porch sheltered under a shed-roofed dormer with exposed, wood rafters. The second story porch has been enclosed and features tripartite, wood, Jalousie windows. The primary entrance is comprised of a single-leaf door with a wrought iron storm door surmounted by a transom. The house features 9/9 and 6/1, wood, double-hung sash windows. The roof is side gable clad in asphalt shingles with

brackets under the rakes. There is a shed-roofed dormer on the south elevation. The house features an interior, brick chimney with a corbelled cap on the west elevation.

- This is a one-story shed designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in wood siding.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **737 34th Street**
PROPERTY NAME: House, 737 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1930
DHR NUMBER (S): 122-5087-0898
DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1930. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch incorporated under an extension of the main roof on the northeast corner. The porch features clustered, wood piers resting on brick pedestals. The primary entrance is comprised of a single-leaf, wood, paneled door with three lights. The house features individual and tripartite, 1/1, metal, double-hung sash windows. There is a gable-roofed dormer on the façade that features tripartite, 1/1, metal, double-hung sash windows. There is a one-story, projecting, squared bay on the south end of the east elevation. There is a single-leaf door on the squared bay. The roof is side gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **745 34th Street**
PROPERTY NAME: House, 745 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0899
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system. The first story is clad in common bond brick veneer and the second story is clad in aluminum siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, shed roof; square, wood columns resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a boarded transom and flanked by sidelights. The house features individual and tripartite, 1/1, wood, double-hung sash windows with storm windows. The first story windows features rowlock brick sills. The building features foundation, 6-light, wood, casement windows. There are gable-roofed dormers on the façade and the east and west elevations. The roof is hipped clad in asphalt shingles with wide eaves. The house features an interior, brick chimney with corbelled cap on the west elevation. There is a two-story, aluminum-clad ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **806 34th Street**
PROPERTY NAME: House, 806 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-0900
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1916. It incorporates a brick foundation and a parged brick structural system. The south façade features an enclosed, one-story, two-bay porch with an asphalt-shingled, hipped roof. The porch features a single-leaf door with a wrought iron storm door; and 6/6, metal, double-hung sash windows. The house features individual and paired, 6/6, metal, double-hung sash windows. There is a one-story, projecting, canted bay on the first story of the east elevation. There are hip-roofed dormers that features paired, 1/1, metal, double-hung sash windows on the façade and the east and west elevations. The roof is hipped clad in slate shingles with wide eaves. The house features a central, interior, brick chimney with corbelled cap. There is a two-story, vinyl-clad addition appended to the north elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1945. The garage features a parged structural system. The roof is side gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **810 34th Street**
PROPERTY NAME: House, 810 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1955
DHR NUMBER (S): 122-5087-0901
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1955. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a projecting, squared bay surmounted by a gable. There is an incorporated porch on the east end of the projecting block. The porch features a wrought iron post and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door. The house features individual, paired, and tripartite, 2/2, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows. The roof is side gable clad in asphalt shingles. The house features an exterior, brick chimney on the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **811 34th Street**
PROPERTY NAME: House, 811 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0902

DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch incorporated under a flared extension of the main roof. The porch features wrought iron posts resting on brick pedestals; and a wrought iron balustrade. The primary entrance is a single-leaf door with a storm door. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. There is an oversized, gable-roofed dormer on the façade. The roof is side-gable clad in asphalt shingles with wide eaves. The house features an interior, parged brick chimney on the west elevation. There is a porch incorporated under an extension of the main roof on the south elevation.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1960. It incorporates metal frame structural system clad in corrugated metal siding. The shed features a double-leaf, corrugated metal door. The roof is gable clad in corrugated metal.
- This is a one-story shed designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in asbestos siding. The roof is gable clad in asphalt shingles with an eave that creates an overhang on the north elevation of the shed.
- This is a one-story carport designed in the Modern Movement style and constructed circa 1970. It incorporates a metal frame structural system and a flat, metal-clad roof.
- This is a one-story carport designed in the Modern Movement style and constructed circa 1970. It incorporates a metal frame structural system and a flat, metal-clad roof.

CONTRIBUTING (2 - buildings)
NON-CONTRIBUTING (1 - building)
NON-CONTRIBUTING (2 - structures)

PROPERTY ADDRESS: **812 34th Street**
PROPERTY NAME: House, 812 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0903
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; square, wood posts; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door surmounted by a transom. There is a one-story, projecting, squared bay on the west end of the first story façade. The house features 2/2, wood, double-hung sash windows with storm windows. There is a paired, wood window with square- and X-shaped patterning on the second story façade. There is a one-story, projecting, canted bay on the first story of the east elevation. The canted bay is surmounted by an asphalt-shingled, shed roof with exposed, wood rafters, supported by oversized wood brackets. There are slate-clad, hip-roofed dormers on the façade and the west

elevation that feature wood, fixed windows and exposed, wood rafters. The roof is hipped clad in asphalt shingles with wide eaves. The house features an exterior, brick chimney on the north elevation and a central, interior, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **815 34th Street**
PROPERTY NAME: House, 815 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-0904
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story porch with two bays incorporated under the main roof. The porch features paneled, wood piers resting on brick pedestals; and a plain, wood balustrade. There is a shed-roofed dormer on the façade with a second story porch. The second-story porch has three bays and features wood posts. The primary entrance is comprised of a single-leaf, metal door with an oval-shaped light and a storm door. There is a single-leaf, wood door with a light and a storm door accessing the second story porch. The house features 6/6, wood, double-hung sash windows. The roof is side gable clad in asphalt shingles. The house features an exterior, brick chimney with a corbelled cap on the east elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in vertical board. The roof is hipped clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **817 34th Street**
PROPERTY NAME: House, 817 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0905
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1919. It incorporates a brick foundation and a wood frame structural system clad weatherboard. The north façade features a one-story, two-bay porch with an asphalt-shingled, shed roof; exposed, wood rafters under the eaves; wood brackets under the rakes; wood piers resting on brick pedestals; and a plain, wood balustrade. A false eave is applied to the east and west elevations forming a false gable on the porch roof. The primary entrance is comprised of a single-leaf, wood, paneled door with a storm door. The house features individual and tripartite, 6/1, wood, double-hung sash windows with storm windows. There is a tripartite window on the second story facade that is surmounted by an asphalt-shingled pent roof supported by brackets and features exposed rafters. The façade gable features a triangle-shaped louvered vent at the roof apex. The roof is gable clad in asphalt shingles with exposed, wood

rafters under the eaves and wood brackets under the rakes.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **818 34th Street**
PROPERTY NAME: House, 818 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1956
DHR NUMBER (S): 122-5087-0906
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1956. It incorporates a brick foundation and wood frame structural system clad in brick veneer. The south façade features a one-story, three-bay porch with an asphalt-shingled roof; square, wood posts; and a wrought iron balustrade. The primary entrance is centrally located and is comprised of a single-leaf, metal door with a wrought iron storm door. The house features 2/2, wood, double-hung sash windows with storm windows and rowlock brick sills. Non-functional shutters flank the façade windows. The roof is hipped clad in asphalt shingles with wide eaves. The house features an interior, brick chimney with a metal chimney pot on the east elevation.

- There is a one-story shed designed in the Modern Movement style and constructed circa 1956. It incorporates a wood frame structural system clad in weatherboard. The roof is side gable.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **819 34th Street**
PROPERTY NAME: House, 819 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0907
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad aluminum siding. The north façade features a one-story, one-bay porch with an asphalt-shingled, gable roof; wood brackets under the rakes; clustered, wood piers resting on brick pedestals; and a wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door. The house features 1/1, wood, double-hung sash windows with storm windows. There is an oversized, gable-roofed dormer on the façade. The dormer features fixed, wood windows and wood brackets under the rakes. There is a one-story, projecting, squared bay surmounted by a shed roof on the east elevation. The roof is side gable clad in asphalt shingles with wood brackets under the rakes. The house features a central, interior, parged brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **820 34th Street**
PROPERTY NAME: House, 820 34th Street

OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-0908
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1922. It incorporates a brick foundation and a stuccoed, wood frame structural system. The south façade features a one-story, three-bay porch with an asphalt-shingled, shed roof; stuccoed piers at the corners; posts resting on stuccoed pedestals flanking the porch entrance; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door. The house features individual, paired, and tripartite, 6/1, wood, double-hung sash windows with storm windows. There is a single-leaf door surmounted by a shed roof supported by wood brackets on the west elevation. There is a gable-roofed dormer on the façade that is clad in weatherboard and features a tripartite grouping of Jalousie windows and exposed, wood rafters. The roof is hipped clad in asphalt shingles with wide eaves. The house features a central, interior, parged brick chimney.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1930. The garage has been stuccoed and features a hipped roof clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **821 34th Street**
PROPERTY NAME: House, 821 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-0909
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1921. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features clustered, battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with lights and a storm door. The house features 1/1, wood, double-hung sash windows with storm windows. There is an oversized, Jerkinhead-gable-roofed dormer on the north façade that features brackets under the rakes. There is a one-story, projecting, squared bay on the first story of the east elevation that is surmounted by a shed roof. The roof is side gable clad in asphalt shingles with brackets under the rakes. The house features a central, interior, brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **822 34th Street**
PROPERTY NAME: House, 822 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-0910
DESCRIPTION (S):

This is a two-story house designed in the Craftsman style and constructed in 1921. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, three-bay porch incorporated the main roof. The porch features wood piers; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a light and a wrought iron storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is an oversized, shed-roofed dormer on the façade. There is a one-story, projecting, squared oriel on the east elevation that is surmounted by a shed roof. There is a single-leaf, metal door on the east elevation. The roof is side gable clad in asphalt shingles with a raking cornice. The house features an interior, brick chimney on the east elevation. There is a shed-roofed ell appended to the north elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1945. The garage is stuccoed and features an asphalt-shingled roof.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **823 34th Street**
PROPERTY NAME: House, 823 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0911
DESCRIPTION (S):
This is two-story house designed in the Colonial Revival style and constructed in 1918. It incorporates a parged brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a porch with an asphalt-shingled, gable roof, and wrought iron posts and balustrade. The primary entrance is comprised of a single-leaf, wood door with three lights and a wrought iron storm door. The house features 6/6, metal, double-hung sash windows. Non-functional shutters flank the façade windows. There is a one-story, projecting, squared bay on the first story of the east elevation. The roof is cross-gable clad in asphalt shingles. The house features a central, interior, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **824 34th Street**
PROPERTY NAME: House, 824 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0912
DESCRIPTION (S):
This is two-story house designed in the Craftsman style and constructed in 1918. It incorporates a parged brick foundation and a wood frame structural system. The first story has been stuccoed and the second story is clad in vinyl siding. The south façade features an asphalt-shingled, gable roof porch with brackets under the rakes, stuccoed posts, and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door. The house features 6/6, metal, double-hung sash windows. Non-functional shutters flank the façade windows. The façade gable features a 6-light, fixed, metal window. There is a one-story,

projecting, squared bay on the first story of the east elevation. There is a single-leaf door with a storm door surmounted by a shed-roofed overhang on the east elevation. The roof is gable clad in asphalt shingles with wide eaves. There is a one-story, shed-roofed, aluminum-clad ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **825 34th Street**
PROPERTY NAME: House, 825 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0913
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, one-bay porch incorporated under the main roof. The porch features battered, wood piers resting on brick pedestals, and a wrought iron balustrade. The entrance is comprised of a single-leaf door with a storm door. The house features 8/1 and 8/8, wood, double-hung sash windows with storm windows. There is an oversized, Jerkinhead-gable-roofed dormer on the façade that features brackets under the rakes. Non-functional shutters flank the paired, 8/8, wood, double-hung sash windows on the dormer. There is a one-story, projecting, squared bay on the first story of the east elevation. The roof is side gable clad in asphalt shingles with brackets under the rakes. The house features a central, interior, brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **826 34th Street**
PROPERTY NAME: House, 826 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1925
DHR NUMBER (S): 122-5087-0914
DESCRIPTION (S):
This is two-story house designed in the Craftsman style and constructed in 1925. It incorporates a parged brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, one-bay porch incorporated under the main roof. The porch features vinyl-clad posts and balustrade. The primary entrance is comprised of a single-leaf, wood door with lights and a wrought iron storm door. The house features individual, paired and tripartite, 1/1, wood, double-hung sash windows. There is an oversized, gable-roofed dormer on the façade. The dormer features brackets under the rakes and a 6-light, fixed, metal window at the roof apex. There is a one-story, projecting, squared bay on the first story of the east elevation. There is a single-leaf door with a storm door surmounted by a shed-roofed overhang on the west elevation. The roof is gable clad in asphalt shingles with brackets under the rakes. There is a two-story, shed-roofed ell appended to the north elevation.

- This is a one-story garage designed in the Craftsman style and constructed circa 1925. It incorporates a wood frame structural system clad in wood shingles. The roof is hipped clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **827 34th Street**
PROPERTY NAME: House, 827 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0915
DESCRIPTION (S):
This is two-story house designed in the Craftsman style and constructed in 1919. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, gable roof; clustered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door and a wrought iron storm door. The house features 1/1, wood, double-hung sash windows with storm windows. There is an oversized, gable-roofed dormer on the façade that features brackets under the rakes and an enclosed porch. The second-story, enclosed porch features an asphalt-shingled shed roof and is clad in wood shingles. The dormer features brackets under the rakes and a 6-light, fixed, metal windows. There is a one-story, projecting, squared bay on the first story of the east elevation. The roof is side gable clad in asphalt shingles with brackets under the rakes.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **828 34th Street**
PROPERTY NAME: House, 828 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-0916
DESCRIPTION (S):
This is two-story house designed in the Craftsman style and constructed in 1917. It incorporates a stuccoed brick foundation and a stuccoed, wood frame structural system. The south façade features a two-story porch incorporated under the main roof. The first story porch is two bay and features an asphalt-shingled, false, gable roof with brackets under the rakes; stuccoed piers; and a closed, vinyl balustrade. The second story porch has been enclosed and stuccoed. Fixed, metal windows punctuate the second-story porch walls. The primary entrance is comprised of a single-leaf door with a wrought iron storm door. The house features 1/1, wood, double-hung sash windows with storm windows. Metal awnings surmount the windows on the west elevation. There is a one-story, projecting, squared bay on the first story of the east elevation. There is a single-leaf door with a wrought iron storm door surmounted by a shed-roofed overhang on the west elevation. The roof is side gable clad in asphalt shingles with brackets under the rakes. There is a one-story, shed-roofed, vinyl-clad ell appended to the north elevation.

- This is a one-story shed designed in the Modern Movement style and constructed circa 2000. It incorporates a wood frame structural system clad in vinyl siding. The roof is gambrel clad in asphalt shingles.

CONTRIBUTING (1 - building)

NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **839 34th Street**
PROPERTY NAME: House, 839 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-0917
DESCRIPTION (S):
This is two-story house designed in the Craftsman style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features square, wood, columns resting on brick pedestals; and a wrought iron post and balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door. The house features 1/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows. There is an oversized, gable-roofed dormer on the façade. The dormer features brackets under the rakes. There is a one-story, projecting, squared bay on the first story of the east elevation. The roof is side gable clad in asphalt shingles with brackets under the rakes. The house features a central, interior, parged brick chimney.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1945. It incorporates a wood frame structural system clad in corrugated metal. The shed features a double-leaf, corrugated metal door. The roof is shed clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **840 34th Street**
PROPERTY NAME: Duplex, 840 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0918
DESCRIPTION (S):
This is a two-and-one-half-story duplex designed in the Late 19th and Early 20th Century American Movement style and constructed in 1918. It incorporates a brick foundation and wood frame structural system clad in wood shingles. The south façade features a two-story, one-bay porch with an asphalt-shingled shed-roof with exposed, wood rafters. The porch features wood-shingled posts and balustrades. There are single-leaf, wood door with lights and storm doors accessing the porch. There are two entrances on the façade flanking the porch that are comprised of single-leaf, metal doors surmounted by shed-roofed overhangs. The duplex features individual and tripartite, 6/1, wood, double-hung sash windows with storm windows. There is a gable-roofed dormer on the façade that features paired, 6/1, wood, double-hung sash windows; and exposed, wood rafters under the eaves. There is a projecting, squared, oriel on the second story of the west elevation. The roof is side gable clad in asphalt shingles with exposed, wood rafters under the eaves and brackets under the rakes.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in corrugated metal. The garage has partially collapsed.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **841 34th Street**
PROPERTY NAME: House, 841 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0919
DESCRIPTION (S):
This is two-story house designed in the Craftsman style and constructed in 1918. It incorporates a parged brick foundation and wood frame structural system. The first story has been stuccoed and the second story is clad in wood shingles. The north façade features a two-story porch incorporated under an extension of the main roof. The first story porch is two bay and features a false, hipped roof with exposed wood, rafters; stuccoed piers and balustrade; and a wood door frame with transom surmounted by gable-roofed overhang supported by brackets. The second story porch has been enclosed and is clad in wood shingles punctuated by paired, 6-light, wood, casement windows. The primary entrance is comprised of a single-leaf door with a storm door. The house features 1/1, wood, double-hung sash windows with storm windows. There is a single-leaf door surmounted by a shed-roofed overhang on the west elevation. The roof is side gable clad in asbestos shingles with brackets under the rakes.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **843 34th Street**
PROPERTY NAME: House, 843 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1924
DHR NUMBER (S): 122-5087-0920
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1924. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, enclosed porch incorporated under an extension of the main roof. The porch features battered, wood piers; an asbestos-shingled balustrade; a metal awning; and 1/1, metal, double-hung sash windows. The primary entrance is comprised of a single-leaf door with a wrought iron storm door. The house features 6/1, wood, double-hung sash windows with storm windows. There is an oversized, gable-roofed dormer on the façade that features brackets under the rakes; and a metal, louvered vent at the roof apex. The roof is side gable clad in asphalt shingles with brackets under the rakes. There is a one-story ell appended to the south elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1925. It incorporates a wood frame structural system clad in weatherboard siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **844 34th Street**
PROPERTY NAME: House, 844 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1923
DHR NUMBER (S): 122-5087-0921
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1923. It incorporates a brick foundation and a wood frame structural system clad aluminum siding. The south façade features a one-story, enclosed porch with an asphalt-shingled, hipped roof; square, wood columns; an aluminum-clad balustrade; and 1/1, vinyl, double-hung sash windows. The porch is accessed by a single-leaf door with a storm door. The house features 1/1, vinyl, double-hung sash windows. The roof is gable clad in asphalt shingles with a boxed cornice. The façade gable is closed and features a metal, louvered vent. The house features an interior, brick chimney with a corbelled cap on the east elevation. There is a one-story, shed-roofed ell appended to the north elevation.

- There is a one-story shed designed in the Modern Movement style and constructed circa 1980. It incorporates a wood frame structural system clad in wood siding. The garage features a double-leaf, wood door. The roof is gambrel clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **848 34th Street**
PROPERTY NAME: House, 848 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-0922
DESCRIPTION (S):
This is two-story house designed in the Craftsman style and constructed in 1922. It incorporates a brick foundation and wood frame structural system. The first story is 6-course, American bond brick and the second story is clad in vinyl siding. The south façade features a two-story porch incorporated under a shed roof extending from the main roof. The first story porch is two bay and features brick piers. The second story porch has been enclosed and is clad in vinyl siding. The primary entrance is comprised of a single-leaf, metal, paneled door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a hip-roofed dormer on the south facade that features a boarded window opening. The roof is hipped clad in asphalt shingles with wide eaves. The building features an exterior, brick chimney on the east elevation.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **849 34th Street**
PROPERTY NAME: House, 849 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1928
DHR NUMBER (S): 122-5087-0923
DESCRIPTION (S):
This is a two-story house designed in the Dutch Colonial Revival style and constructed in 1928. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The primary entrance is located on the north façade and is comprised of a single-leaf, metal, paneled door with a storm door flanked by 4-light sidelights and surmounted by a gable-roofed overhang with cornice returns supported by brackets. The house features 1/1, vinyl, double-hung sash windows. There is an enclosed, screened porch on the east elevation that features an asphalt-shingled, hipped roof and square, wood posts. The roof is side gable clad in asphalt shingles. There are shed-roofed dormers on the north façade and the south elevation. There are half-circle windows at the roof apexes of the east and west elevations.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1945. It incorporates a wood frame structural system clad in aluminum siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **850 34th Street**
PROPERTY NAME: Apartment Building, 850 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1966
DHR NUMBER (S): 122-5087-0924
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1966. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in brick veneer. The south façade features two entrances comprised of single-leaf, metal, paneled doors with fan-shaped lights accessed by brick stairs. The building features metal, sliding windows with rowlock brick sills. Air conditioning units punctuate the façade. The roof is side gable clad in asphalt shingles.

NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **851 34th Street**
PROPERTY NAME: House, 851 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1934
DHR NUMBER (S): 122-5087-0925

DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1934. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, screened porch with an asphalt-shingled, hipped roof; a boxed cornice; and a single-leaf, screen door. The primary entrance is comprised of a single-leaf door with a storm door. The house features 1/1, wood, double-hung sash windows. Non-functional shutters flank some of the windows. There is a single-leaf door with a storm door accessed by wood stairs on the west elevation. The roof is gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **853 34th Street**
PROPERTY NAME: House, 853 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0926
DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, one-bay porch with an asphalt-shingled, gable roof; square, wood columns; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with four lights and a wrought iron storm door. The house features 6/1, wood, double-hung sash windows. There is a one-story, projecting, squared addition on the east elevation. The east elevation addition features a single-leaf, metal, paneled door with a storm door. There is a one-story, gable-roofed addition appended to the west elevation. The west elevation addition features paired, 1/1, metal, double hung sash windows. The roof is side gable clad in asphalt shingles with wide eaves.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **854 34th Street**
PROPERTY NAME: Duplex, 854 34th Street
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-0927
DESCRIPTION (S):
This is two-and-one-half-story duplex designed in the Craftsman style and constructed in 1917. It incorporates a parged brick foundation and wood frame structural system. The first story is clad in weatherboard and the second story is clad in wood shingles. The south façade features a two-story porch incorporated under a shed roof extending from the main roof. The first story porch has four bays and features wood, columns resting on squat pedestals, and a closed balustrade. The second story porch has been enclosed and is clad in wood shingles. There are two entrances comprised of single-leaf, metal, paneled doors. The easternmost entrance features a metal storm door. The house features 1/1, wood, double-hung sash windows with storm windows. There is a gable-roofed dormer on the façade that features a double-hung sash window. There is a projecting, squared oriel on the second story of the east elevation. The roof is side gable clad in asphalt shingles with cornice returns. The house features an interior, parged brick chimney with a corbelled cap.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **856 34th Street**
PROPERTY NAME: House, 856 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1953
DHR NUMBER (S): 122-5087-0928
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1953. It incorporates a brick foundation and a wood frame structural system clad in weatherboard. The south façade is partially clad in brick veneer. There is a two-bay porch incorporated under the main roof on the east end of the façade. The porch features wrought iron posts and balustrade; a metal awing. The house features metal, awning windows surmounted by metal awnings. Non-functional shutters flank the façade windows. The roof is hipped clad in asphalt shingles. The house features two interior brick chimneys on the north and west elevations. The roof is hipped clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **857 34th Street**
PROPERTY NAME: House, 857 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0929
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1920. It incorporates a parged brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, one-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns, and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with four lights and a storm door. The house features a 6/1, wood, double-hung windows with storm windows. The roof is gable clad in asphalt shingles with brackets under the rakes. The façade gable features a fixed, wood window at the roof apex.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in asbestos siding.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **860 34th Street**
PROPERTY NAME: House, 860 34th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0930
DESCRIPTION (S):

This is a two-story house designed in the Colonial Revival style and constructed in 1919. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; chamfered, wood posts; and a plain, wood balustrade. The primary entrance is centrally located and is comprised of a single-leaf, wood, paneled door with a storm door. The house features 1/1, metal, double-hung sash windows. There is a single-leaf door accessed by wood stairs on the west elevation. The roof is hipped clad in asphalt shingles with wide eaves. The house features a central interior brick chimney and an exterior, brick chimney on the west elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1945. It incorporates a wood frame structural system clad in corrugated metal. The garage features a double-leaf, corrugated metal door. The roof is gable clad in corrugated metal.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **861 34th Street**
PROPERTY NAME: Duplex, 861 34th Street
OTHER NAME (S): Apartment Building, 861 34th Street
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0931
DESCRIPTION (S):
This is a two-story duplex designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The north façade features a two-story porch with an asphalt-shingled, hipped roof with exposed, wood rafters. The first story porch features a wood pier resting on a brick pedestal; brackets; and is enclosed on the west end. The west end of the first story porch is clad in wood shingles punctuated by a 1/1, wood, double-hung sash window; and a metal, sliding window. The second story porch features plain, wood posts and balustrade. The second story porch is accessed by a single-leaf, wood door with multiple lights and a storm door. There are three entrances on the first story façade. The easternmost entrance is comprised of a single-leaf, wood door with three lights. The central entrance is comprised of a single-leaf door with a storm door. The westernmost entrance is comprised of a single-leaf, wood door with three lights. The duplex features 6/1, wood, double-hung sash windows. The roof is gable clad in asphalt shingles with exposed, wood rafters. The façade gable features a wood, louvered vent. The duplex features two interior, brick chimneys with corbelled caps on the west elevation. There is a two-story, shed-roofed porch appended to the south elevation.
CONTRIBUTING (1 - building)

35th Street

PROPERTY ADDRESS: **110 35th Street**
PROPERTY NAME: House, 110 35th Street
OTHER NAME (S):

CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0935
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system. The first story is clad in brick veneer and the upper stories are clad in vinyl siding. The south façade features a two-story porch with an asphalt-shingled, hipped roof on the west end. The first story porch features wood, Tuscan columns resting on a brick balustrade; and a boxed cornice with a wide frieze. The second story porch features wood, Tuscan columns; a plain, wood balustrade; and a boxed cornice with a wide frieze. The east end of the south façade features an enclosed, one-story porch. The porch is clad in wood panels punctuated by fixed, wood windows with clerestory windows flanked by pilasters. The primary entrance is comprised of a single-leaf, wood door with a storm door flanked by traceried sidelights and surmounted by a transom. The first and second stories feature individual and tripartite, wood, Queen Anne, double-hung sash windows with storm windows. The attic story features individual and paired, 6/6, metal, double-hung sash windows. There are two, one-story, projecting, squared bays on the west elevation. The bays feature tripartite, wood, Queen Anne windows and asphalt-shingled, shed roofs. There is a two-story, projecting, squared bay centrally located on the west elevation. The first story of the bay features an entrance sheltered by a porch featuring oversized, wood columns resting on brick cheek walls. The central bay is surmounted by a hip roof. There is a shed-roofed dormer and an intersecting gable on the on the west elevation. There is two-story, projecting, squared block on the east elevation that features a shed roof. There is a shed-roofed dormer on the east elevation. The roof is cross-gable clad in asphalt shingles. There is an exterior, brick chimney with a corbelled cap on the east elevation. There is a one-story, shed-roofed, vinyl-clad ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **200 35th Street**
PROPERTY NAME: House, 200 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1911
DHR NUMBER (S): 122-5087-0936
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1911. It incorporates a brick foundation clad in rusticated stone and a wood frame structural system. The first story is clad in aluminum siding and the second story is clad in vinyl siding. The south façade features a one-story, five-bay porch with an asphalt-shingled, hipped roof; a centrally located, projecting, rounded bay surmounted by a pyramidal-shaped roof; wood, Corinthian columns resting on rusticated stone pedestals; and a boxed cornice. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a transom. The house features wood, Queen Anne, double-hung sash windows with storm windows. There is a tripartite, 1/1, metal, double-hung sash window surmounted by a fan-shaped panel on the east end of the first story façade. There is a one-story, projecting, canted bay on the second story façade. There are one-story, projecting, canted bays surmounted by an asphalt-shingled, hipped roofs on the east and west elevations. There are hip-roofed dormers

on the façade, and the east and west elevations. The roof is hipped clad in asphalt shingles with wide eaves. The house features a central, interior, rusticated stone chimney with a corbelled cap.

- This is a one-story carport with a roof deck appended to the north elevation of the Queen Anne-style house. The carport was constructed circa 1960. The carport features aluminum cladding on the first story and a vinyl-clad balustrade on the deck level.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - structure)

PROPERTY ADDRESS: **201 35th Street**
PROPERTY NAME: House, 201 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1908
DHR NUMBER (S): 122-5087-0937
DESCRIPTION (S):
This is a two-and-one-half story house designed in the Queen Anne style and constructed in 1908. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two- bay porch with an asphalt-shingled, hipped roof; modillion cornice; wood, Tuscan columns; and turned balusters. A pediment with a foliate motif surmounts the porch entrance. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a transom. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable features a Palladian window of a 1/1, wood, double-hung sash windows flanked by fixed, wood windows. There is a two-story, projecting, canted bay surmounted by a closed gable on the east elevation. The closed gable features fixed, wood windows and is surmounted by an interior, parged brick chimney with a corbelled cap. The house features 1/1, wood, double-hung sash windows with storm windows. There is a hip-roofed dormer clad in wood shingles on the east elevation. There is a two-story porch with an asphalt-shingled, shed roof on the south end of the east elevation. The porch features plain, wood posts and balustrades; and is accessed by single-leaf doors with storm doors. The roof is hipped-cross-gable clad in slate shingles with modillions under the wide eaves. There is an interior, brick chimney with a corbelled cap on the east elevation.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1990. It incorporates a wood frame structural system clad in vinyl siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **203 35th Street**
PROPERTY NAME: House, 203 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1908
DHR NUMBER (S): 122-5087-0938

DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1908. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a two-story porch. The first story porch is two-bay with an asphalt-shingled, hipped roof; a dentiled cornice; square, wood columns; and turned balusters. The second story porch is one bay located on the west end of the façade. The second story porch features an asphalt-shingled, hipped roof; a boxed cornice; and plain, wood posts and balustrade. The second story porch is access by a single-leaf door with a storm door. The primary entrance is comprised of a single-leaf, wood, paneled door with a light and a storm door surmounted by a boarded transom. There is a two-story, projecting, canted bay surmounted by a closed gable on the west end of the façade. The closed gable features a 1/1, wood, double-hung sash window. The house features 1/1, wood, double-hung sash windows with storm windows. There is a fixed, wood, Queen Anne window on the first story of the west elevation. There is a closed gable on the west elevation. The roof is hipped clad in asphalt shingles. The house features an interior, parged brick chimney on the east elevation. There is a one-story ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **204 35th Street**
PROPERTY NAME: House, 204 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0939
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a boxed cornice; wood, Tuscan columns; and turned balusters. The primary entrance is comprised of a single-leaf, wood, paneled door surmounted by a boarded transom. There is a two-story, projecting, squared bay surmounted by a closed gable on the east end of the façade. The closed gable features a 1/1, wood, double-hung sash window; and carved vergeboards and spindlework in the gable. The house features 1/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, squared bay surmounted by a closed gable on the east elevation. There is a gable-roofed dormer on the west elevation that features a 1/1, wood, double-hung sash windows surmounted by a closed gable. The roof is hipped-cross-gable clad in asphalt shingles with wide eaves and a frieze. The house features two interior, brick chimneys with corbelled caps on the on the east elevation and one, interior, brick chimney with a corbelled cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **207 35th Street**
PROPERTY NAME: House, 207 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910

DHR NUMBER (S): 122-5087-0940
DESCRIPTION (S):
This is a two-story house designed in the Late Victorian style and constructed in 1910. It incorporates a 7-course American bond brick foundation and structural system. The façade is clad in common bond brick veneer. The north façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof. The porch features wrought iron posts resting on brick pedestals; and a plain, wood balustrade. The porch has been enclosed with brick on the east elevation and is punctuated by a sliding, plate glass door. The primary entrance is comprised of a single-leaf door surmounted by a transom. The house features 1/1, wood, double-hung sash windows. Some of the windows feature rusticated stone lintels and sills. There is a two-story, tower on the northwest corner of the house with a conical roof. There is a two-story, projecting, canted bay surmounted by a closed gable on the west elevation. The closed gable is clad in vinyl siding and features a 1/1, wood, double-hung sash window. The windows on the canted bay feature two-course segmental arches. There is a closed gable on the facade that is clad in vinyl siding and features a 1/1, wood, double-hung sash window. The roof is hipped-cross-gable clad in slate shingles with a wide frieze. The house features two, interior, brick chimneys with corbelled caps on the west elevation. There is a one-story, enclosed porch appended to the south elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1945. It incorporates wood frame structural system clad in corrugated metal. The garage features two, double-leaf, corrugated metal doors. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **210 35th Street**
PROPERTY NAME: House, 210 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-0941
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1905. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a light surmounted by a transom. The house features 1/1, metal, double-hung sash windows. There is a two-story, projecting, squared bay surmounted by a closed gable on the west end of the façade. The closed gable features a 1/1, metal, double-hung sash window. There are gable-roofed dormers on the façade and the east elevation. The dormers features 1/1, metal, double-hung sash windows surmounted by closed gables. The roof is hipped clad in asphalt shingles with a boxed cornice. The house features two interior, brick chimneys with corbelled caps on the east and the west elevations.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **216 35th Street**
PROPERTY NAME: House, 216 35th Street

OTHER NAME (S):
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-0942
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1907. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and turned balusters. The primary entrance is comprised of a single-leaf, wood, paneled door with a light surmounted by a transom. The house features 1/1, metal, double-hung sash windows. There is a two-story, projecting, squared bay surmounted by a closed gable on the west end of the façade. The closed gable features a Palladian window of a 1/1, metal, double-hung sash window with a round arch upper sash flanked by fixed, metal windows surmounted by lintels. There is a two-story, projecting, squared bay surmounted by a closed gable on the west elevation. The closed gable features a 1/1, metal, double-hung sash window. There is a closed, intersecting gable the east elevation. The roof is hipped-cross-gable clad in asphalt shingles with a boxed cornice. The house features two interior, brick chimneys with corbelled caps on the west elevations.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **217 35th Street**
PROPERTY NAME: House, 217 35th Street
OTHER NAME (S): Duplex, 217 35th Street
CONSTRUCTION DATE: 1909
DHR NUMBER (S): 122-5087-0943
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1909. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof. The porch features wood, Tuscan columns; turned balusters; a metal awning; and an enclosure at the entrance with double-leaf, metal storm doors. A pediment surmounts the porch entrance. The primary entrance is comprised of a single-leaf door. The house features 1/1, wood, double-hung sash windows with storm windows. There is a one-story, projecting, squared bay and a one-story, projecting, canted bay on the second story façade. There are two-story, projecting, canted bays surmounted by hip roofs surmounted by gable dormers on the east and west elevations. There are gable-roofed dormers on the façade that feature 1/1, wood, double-hung sash windows with rounded arch upper sashes and cornices returns. The gable-roofed dormers on the east and west elevations feature Palladian windows of 1/1, wood, double-hung sash windows with rounded arch upper sashes and articulated keystones flanked by boarded windows surmounted by cornices; and cornice returns. The roof is deck-on-hip clad in slate shingles with a boxed cornice. The house features an interior, parged brick chimney with a corbelled cap on the east elevation. There is a one-story ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **218 35th Street**

PROPERTY NAME: House, 218 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-0944
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1906. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; square, wood columns; and turned balusters. The primary entrance is comprised of a single-leaf, wood, paneled door with a light and a storm door surmounted by a transom. The house features 1/1, metal, double-hung sash windows. There is a two-story, projecting, squared bay surmounted by a closed gable on the east end of the façade. The closed gable features a 1/1, metal, double-hung sash window. There are gable-roofed dormers on the façade and the west elevation. The dormers features 1/1, metal, double-hung sash windows surmounted by closed gables. There is a two-story, projecting, squared bay surmounted by a closed gable on the west elevation. The roof is hipped-cross-gable clad in asphalt shingles with a boxed cornice. The house features two interior, parged brick chimneys with corbelled caps on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **219 35th Street**
PROPERTY NAME: House, 219 35th Street
OTHER NAME (S): Music School
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-0945
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1907. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; square, wood columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with an oval light surmounted by a transom and flanked by sidelights. The house features 9/1, metal, double-hung sash windows with storm windows. Non-functional shutters flank the second story façade windows. There is a one-story, projecting, squared bay surmounted by a closed gable on the east end of the second story façade. The closed gable features a 1/1, wood, double-hung sash window. There is a two-story, projecting, squared bay surmounted by a closed gable on the east elevation. There is a wood-shingled, gable-roofed dormer on the west elevation. The roof is hipped-cross-gable clad in asphalt shingles with a boxed cornice. The house features two interior, parged brick chimneys with corbelled caps on the east elevation.

- This is a one-story garage appended to the south elevation of the house. The garage is designed in the Modern Movement style and constructed circa 1960. It features a concrete block structural system and a flat roof.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **222 35th Street**
PROPERTY NAME: House, 222 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1908
DHR NUMBER (S): 122-5087-0946
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1908. It incorporates a 7-course, American bond brick foundation and structural system. The south façade is clad in brick veneer and features a one-story, wraparound porch with an asphalt-shingled, hipped roof; a dentiled cornice; wood, Tuscan columns; and turned balusters. The primary entrance is comprised of a single-leaf, wood, paneled door with two lights surmounted by a transom. The house features 1/1 and 2/2, wood, double-hung sash windows with storm windows surmounted by jack arches. The windows feature rusticated limestone sills. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable is clad in wood shingles and features a 1/1, wood, double-hung sash window with a storm window. There is a two-story, projecting, canted bay surmounted by a closed gable on the east elevation. The closed gable is clad in wood shingles and features a 1/1, wood, double-hung sash window with a storm window. There is a closed, intersecting gable on the west elevation that is clad in wood shingles and features a 1/1, wood, double-hung sash window. The roof is hipped-cross-gable clad in asphalt shingles with a boxed cornice. The house features a central, interior, parged brick chimney. There is a one-story, vinyl-clad ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **224 35th Street**
PROPERTY NAME: House, 224 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-0947
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1907. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay, screened porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and turned balusters. The porch entrance is comprised of a single-leaf, metal storm door surmounted by a screened transom. The house features 1/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, squared bay surmounted by a closed gable on the east end of the façade. The closed gable features a 1/1, wood, double-hung sash window. There are gable-roofed dormers on the façade and the west elevation. The dormers features 1/1, metal, double-hung sash windows. The dormer on the façade features a closed gable and the west elevation dormer features cornice returns. There is a two-story, projecting, canted bay surmounted by a closed gable on the east elevation. The roof is hipped-cross-gable clad in asphalt shingles with a boxed cornice. The house features an interior, brick chimney on the east elevation.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **227 35th Street**
PROPERTY NAME: House, 227 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: circa 2000
DHR NUMBER (S): 122-5087-0948
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed circa 2000. It is designed to resemble a Queen Anne-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and turned balusters. A pediment supported by paired, Tuscan columns and clad with wood shingles surmounts the porch entrance. The primary entrance is comprised of a single-leaf, metal, paneled door flanked by sidelights. The house features 2/1, metal, double-hung sash windows. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable is clad in wood shingles. There is a hip-roofed dormer on the façade that features paired, 2/1, metal, double-hung sash windows. The roof is hipped clad in asphalt shingles with a boxed cornice.

- This is a one-story garage designed in the Modern Movement style and constructed in 2000. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, paneled, roll-up door. The roof is hipped clad in asphalt shingles.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **228 35th Street**
PROPERTY NAME: House, 228 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1980
DHR NUMBER (S): 122-5087-0949
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1980. It is designed to resemble a Queen Anne-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and a plain, wood balustrade. A pediment surmounts the porch entrance. The primary entrance is comprised of a single-leaf, metal, paneled door with lights flanked by sidelights. The house features 6/6, metal, double-hung sash windows. There is a two-story, projecting, squared bay surmounted by an intersecting gable on the west end of the façade. There is an intersecting gable on the east end of the façade. The roof is hipped clad in asphalt shingles with a boxed cornice.

- This is a one-story garage designed in the Modern Movement style and constructed in 1980. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, paneled, roll-up door. The roof is hipped clad in asphalt shingles.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **231 35th Street**
PROPERTY NAME: House, 231 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 2001
DHR NUMBER (S): 122-5087-0950
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 2001. It is designed to resemble a Queen Anne-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The north façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; square, wood posts; and plain, wood, balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door surmounted by a transom and flanked by sidelights. The house features individual and paired, 2/2, metal, double-hung sash windows. There is a two-story, projecting, squared block surmounted by a closed gable on the east end of the façade. There is a one-story, projecting, squared bay on the east end of the second story façade that features cornice returns. The gables on the east and west elevations feature cornice returns. The roof is cross-gable clad in asphalt shingles with a boxed cornice.

- This is a one-story garage designed in the Modern Movement style and constructed in 2001. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, paneled, roll-up door. The roof is hipped clad in asphalt shingles.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **235 35th Street**
PROPERTY NAME: House, 235 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: circa 2000
DHR NUMBER (S): 122-5087-0951
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed circa 2000. It is designed to resemble a Queen Anne-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The north façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a rounded arch light and a storm door flanked on the west by a sidelight. The house features 6/6, metal, double-hung sash windows. There is a two-story, projecting, squared bay surmounted by an intersecting, hip roof on the east end of the façade. There is a two-story, projecting, canted bay surmounted by a gable with cornice returns on the squared bay at the east end of the façade. There is a two-story, tower with an octagonal roof on the northwest corner of the building. There is a one-story, projecting, squared block on the south end of the west elevation. The roof is hipped clad in asphalt shingles with a boxed cornice.

- This is a one-story garage designed in the Modern Movement style and constructed circa 2000. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, paneled, roll-up door. The roof is hipped clad in asphalt shingles.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **236 35th Street**
PROPERTY NAME: House, 236 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0952
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1912. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; wood, turned posts; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a boarded transom. The house features 6/6, wood, double-hung sash windows with storm windows. There is an intersecting gable on the façade that is clad in fishscale-cut, wood siding and features a boarded, fixed, wood window. There is an intersecting, closed gable on the west elevation that features a wood, fixed window. The roof is hipped clad in asphalt shingles with a boxed cornice and a frieze. The building features an interior, brick chimney with a corbelled cap on the east elevation. There is a one-story, shed-roofed ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **240 35th Street**
PROPERTY NAME: House, 240 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1989
DHR NUMBER (S): 122-5087-0953
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1989. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The primary entrance is located on the south façade and is comprised of a single-leaf door with a storm door surrounded by a Classical door surround with pilasters. The house features a single-leaf door on the east elevation that is accessed by wood stairs. The house features 6/6, metal, double-hung sash windows. There is a projecting, canted oriel on the east end of the first story façade. The façade gable features an octagonal-shaped, louvered vent. There are octagonal-shaped, metal windows on the second stories of the east and west elevations. The roof is gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **300 35th Street**

PROPERTY NAME: House, 300 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-0954
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1915. It incorporates a brick foundation and a wood frame structural system. The first story is clad in brick veneer and the second story is clad in wood shingles. The south façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a light surmounted by a transom. The house features 1/1, metal, double-hung sash windows. The first story windows are surmounted by segmental arches and features rusticated limestone sills. There is a two-story, projecting, squared bay surmounted by a closed gable on the east elevation. The closed gable is clad in wood shingles and the bay features tripartite windows on the first and second stories. There are gable-roofed dormers on the façade and the east elevation. The dormers feature 1/1, metal, double-hung sash windows surmounted by wood-shingled, closed gables. There is an intersecting, closed gable on the west elevation. The roof is hipped-cross-gable clad in asphalt shingles with a boxed cornice and a wide frieze. The house features an interior, brick chimney on the north elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1915. It incorporates a wood frame structural system clad in wood shingles. The garage features a roll-up door; a double-hung sash window; and a single-leaf door. The roof is hipped clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **301 35th Street**
PROPERTY NAME: House, 301 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1908
DHR NUMBER (S): 122-5087-0955
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1908. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; square, wood columns; and turned balusters. The primary entrance is comprised of a single-leaf, wood, paneled door with a storm door surmounted by a transom. The house features 1/1, metal, double-hung sash windows. There is a two-story, projecting, squared bay surmounted by a closed gable on the east end of the façade. The closed gable is clad in fishscale-cut, wood shingles and features a 1/1, metal, double-hung sash window. There are gable-roofed dormers on the façade and the west elevation. The dormers features 1/1, metal, double-hung sash windows surmounted by closed gables. There is a two-story, projecting, squared bay surmounted by a closed gable on the west elevation. The closed gable is clad in fishscale-cut, wood shingles and features two, wood, casement windows. The roof is hipped-cross-gable clad in asphalt shingles with a boxed cornice. The house features two

interior, brick chimneys with corbelled caps on the east elevation. There is a two-story porch appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **304 35th Street**
PROPERTY NAME: House, 304 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-0956
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1907. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and turned balusters. A portion of the porch on the east elevation has been enclosed and is clad in asbestos siding punctuated by a 1/1, metal, double-hung sash window. The primary entrance is comprised of a single-leaf door surmounted by a transom. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable is clad in wood shingles and features a 1/1, wood, double-hung sash window. The house features 1/1, wood, double-hung sash windows with storm windows. A metal awning surmounts a window on the second story of the east elevation. There is a two-story, projecting, canted bay surmounted by a closed gable on the east elevation. The closed gable features a 1-light, wood, casement window. There is an intersecting, closed gable on the west elevation that is clad in wood shingles and features a double-hung sash window. There is a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, turned posts; and turned balusters on the east elevation at the north corner. The porch is accessed by a single-leaf door with a storm door surmounted by a transom. There are hip-roofed dormers on the east elevation and the façade. The dormers are clad in asphalt shingles and feature 1/1, wood, double-hung sash windows. The roof is hipped-cross-gable clad in asphalt shingles with carved brackets under the wide eaves on the façade and at the corners of the gables surmounting the canted bays. The house features a central, interior, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **305 35th Street**
PROPERTY NAME: House, 305 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1909
DHR NUMBER (S): 122-5087-0957
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1909. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a two-story porch. The first story porch is two bays and features an asphalt-shingled, hipped roof; a boxed cornice; and asbestos-clad posts and balustrade. The second story porch is one bay and is situated above

the east bay of the first story porch. It features an asphalt-shingled hipped roof; a boxed cornice; and asbestos-clad posts and balustrade. The second story porch is accessed by a single-leaf, wood door with multiple lights. The primary entrance is comprised of a single-leaf, wood, paneled door with a light surmounted by a boarded transom. The house features 1/1, wood, double-hung sash windows with storm windows. There is an oval-shaped, wood window on the first story of the west end of the façade. There is a two-story, projecting, canted bay surmounted by an intersecting gable on the east end of the facade. There is a two-story, projecting, squared bay surmounted by a closed gable on the east elevation. The closed gable features paired, wood windows. There is a gable-roofed dormer on the façade that features a double-hung sash window surmounted by a closed gable. The roof is hipped-cross-gable clad in asphalt shingles with a boxed cornice and wide eaves. The house features an interior, brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **306 35th Street**
PROPERTY NAME: Apartment Building, 306 35th Street
OTHER NAME (S): Bellegrade Apartments
CONSTRUCTION DATE: circa 1910
DHR NUMBER (S): 122-5087-0958
DESCRIPTION (S):
This is a three-story apartment building designed in the Colonial Revival style and constructed circa 1910. It incorporates a 7-course, American bond brick foundation and structural system. The south façade is clad in common bond brick veneer. There are two, three-story, one-bay porches sheltered under a common, asphalt-shingled, hipped roof. The porches flank a centrally located entrance. The porches feature brick piers and turned balusters. The porches are accessed by single-leaf, metal, paneled doors. Some of the porch doors feature storm doors. The primary entrance is comprised of a single-leaf, metal, paneled door flanked by sidelights and surmounted by a broken pediment. The building features 1/1, metal, double-hung sash windows with rowlock brick sills. The windows on the east and west elevations feature 2-course brick segmental arches. The roof is flat with a stepped parapet on the east and west elevations. The building features a corbelled cornice on the south façade and interior, brick chimneys embedded into the east and west elevation walls. This building was renovated in 2000.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **307 35th Street**
PROPERTY NAME: House, 307 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0959
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wrought-iron posts resting on brick

pedestals; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door surmounted by a transom. The house features 1/1, metal, double-hung sash windows. There is a two-story, projecting, squared bay surmounted by an intersecting, closed gable on the west end of the façade. The closed gable features a 1/1, wood, double-hung sash window with a storm window. There is a two-story, projecting, canted bay surmounted by a closed gable on the west elevation. The roof is hipped-cross-gable clad in asphalt shingles with a boxed cornice. The house features an interior, parged brick chimney with a corbelled cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **322 35th Street**
PROPERTY NAME: House, 322 35th Street
OTHER NAME (S): Apartment Building, 322 35th Street
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0965
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a two-story porch. The first story porch wraps around the east elevation and features an asphalt-shingled, hipped roof; wood, Tuscan columns; and plain, wood balustrade. The second story porch features two bays; an asphalt-shingled, shed roof; wood, Tuscan columns resting on wood pedestals; and a plain, wood balustrade. The second story porch is accessed by a single-leaf, wood door with multiple lights and a storm door. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, squared, bay surmounted by an intersecting gable on the east elevation. The bay features a single-leaf, wood door with three lights and a storm door. The intersecting gable features a double-hung sash window and cornice returns. The façade gable is closed and features paired, 1/1, wood, double-hung sash windows. There is a gable-roofed dormer on the west elevation that features a double-hung sash window surmounted by a closed gable. The roof is gable clad in asphalt shingles. The house features interior, brick chimneys on the east and north elevations. There is a two-story addition appended to the north elevation. The addition features an incorporated porch on the first story and a balcony surmounting the second story. This house has been converted into apartments.

- This is a two-story garage/dwelling designed in the Modern Movement style and constructed circa 1970. It incorporates a wood frame structural system clad in vinyl siding. The building features a metal, paneled, roll-up door; and a single-leaf, metal, paneled door with a fan-shaped light. The building features individual and paired, 6/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **400 35th Street**

PROPERTY NAME: House, 400 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1985
DHR NUMBER (S): 122-5087-0967
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1985. It is designed to resemble a Colonial Revival-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The south façade features an asphalt-shingled, shed roof; and plain, wood posts and balustrade. The primary entrance is centrally located and is comprised of a single-leaf door with a wrought iron storm door. The house features 1/1, metal, double-hung sash windows flanked by non-functional shutters. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **405 35th Street**
PROPERTY NAME: House, 405 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0968
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1912. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; square, wood columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with lights and a storm door surmounted by a transom and flanked by 3-light sidelights. The house features 9/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, squared bay surmounted by an intersecting, hipped roof on the east end of the façade. There is a two-story, projecting, squared bay surmounted by an intersecting, hipped roof on the east elevation. There are hip-roofed dormers on the façade and the east elevation, and intersecting hipped roofs surmounting the projecting bays. The roof is hipped clad in asphalt shingles with a wide frieze and a boxed cornice. The house features an interior, parged brick chimney on the east elevation and an interior, brick chimney with a corbelled cap on the south elevation. There is a one-story porch appended to the south elevation that features wood, turned posts.

- This is a one-story shed designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1935. It incorporates a wood frame structural system clad in asbestos siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **406 35th Street**
PROPERTY NAME: House, 406 35th Street
OTHER NAME (S): Duplex, 406 35th Street
CONSTRUCTION DATE: 1916

DHR NUMBER (S): 122-5087-0969
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a storm door surmounted by a multiple-light transom and flanked by 8-light sidelights. The house features individual and paired, 1/1 and 6/6, wood, double-hung sash windows with storm windows. The façade gable features a tripartite, 6/6, wood, double-hung sash window and brackets under the rakes. The roof is gable clad in asphalt shingles with wide eaves. There are shed-roofed dormers on the east and west elevations that are clad in asphalt shingles. This house has been converted into a duplex.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **407 35th Street**
PROPERTY NAME: House, 407 35th Street
OTHER NAME (S): Duplex, 407 35th Street
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0970
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1912. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a stoop with single-leaf, metal paneled doors surmounted by a metal, shed-roofed overhang and accessed by wood stairs. The house features 1/1, metal, double-hung sash windows. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. There is a two-story, projecting, squared bay surmounted by an intersecting gable with cornice returns on the west elevation. The roof is hipped-cross-gable clad in asphalt shingles with a boxed cornice. The house features an interior, parged brick chimney with a corbelled cap on the east elevation. There is a one-story ell appended to the south elevation. This house has been converted into a duplex.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **410 35th Street/408-412 35th Street**
PROPERTY NAME: Apartment Building, 410 35th Street
OTHER NAME (S): Cordova Apartments, 408-412 35th Street
CONSTRUCTION DATE: circa 1915
DHR NUMBER (S): 122-5087-0971
DESCRIPTION (S):
This is a two-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1915. It incorporates a brick foundation and a stuccoed brick structural system. The building exhibits brick watertable, quoins, and beltcourse. The building occupies a U-shaped footprint on the property with a courtyard opening onto 35th Street. There are five entrances to the apartment building. The

entrances are comprised of one-story, projecting, canted bays surmounted by asphalt-shingled, hipped roof that feature single-leaf, wood doors with nine lights. Double-hung sash windows surmounted by fan-shaped windows are located above each entrance on the second story. Asphalt-shingled, shed-roofed overhangs surmount the fan-shaped windows on the second story. The building features paired, 1/1, metal, double-hung sash windows with rowlock brick sills. The south façade of the east and west wings feature one-bay balconies on the second story. The balconies are sheltered by an extension of the false shed roofs and feature plain, wood posts; and wrought iron balustrade. The balconies are accessed by single-leaf, wood doors with fifteen lights. The building features a flat roof with a parapet coped in a rowlock brick course. The parapet also features crenellated pavilions on the southeast and southwest corners.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **411 35th Street**
PROPERTY NAME: House, 411 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-0972
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a dentiled cornice; wood, Tuscan columns resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with lights surmounted by a multiple-light transom and flanked by sidelights. The house features 1/1, metal, double-hung sash windows. There is a two-story, projecting, canted bay on the east end of the façade. The canted bay features a wood, Queen Anne, double-hung sash window on the first story. The façade gable is closed and features a tripartite, 1/1, metal, double-hung sash window. There is a one-story, squared oriel on the first story of the west elevation. The oriel features paired, double-hung sash windows. There is a closed, intersecting gable on the west elevation. The roof is gable clad in asphalt shingles. There is a one-story ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **413 35th Street**
PROPERTY NAME: House, 413 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0973
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a two-story porch incorporated under a shed roof extending from the main roof. The first story porch features two bays; a false, asphalt-shingled, hipped roof with exposed, wood rafters; square, wood columns; and turned

balusters. The second story porch has been enclosed and features an aluminum-clad balustrade; and tripartite, 1/1, metal, double-hung sash windows. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a wrought iron storm door. The house features 1/1, wood, double-hung sash windows with storm windows. There is a one-story, projecting, squared bay surmounted by a shed roof on the east elevation that features paired, double-hung sash windows. There is a gable-roofed dormer that features paired, double-hung sash windows and wide eaves on the facade. The roof is side gable clad in asphalt shingles. The house features an interior, brick chimney on the east elevation. There is a one-story, shed-roofed ell appended to the south elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement and constructed circa 1920. It incorporates a wood frame structural system clad in vertical board. The garage features double-leaf, vertical board doors. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **414 35th Street**
PROPERTY NAME: House, 414 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0974
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door surmounted by a transom. The house features 1/1, metal, double-hung sash windows. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable features a Palladian window comprised of a wood, rounded arch window flanked by 1/1, wood, double-hung sash windows. There is an intersecting, closed gable on the west elevation. The roof is hipped-cross-gable clad in slate shingles. There is a one-story ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **415 35th Street**
PROPERTY NAME: House, 415 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0975
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in brick veneer. The north façade features a two-story porch incorporated under a shed roof extending from the main roof. The first story porch features two bays; a false, asphalt-shingled, hipped roof with exposed, wood rafters; brick piers; and turned balusters. The

second story porch has been enclosed and features a vinyl-clad balustrade; and sliding, metal windows. The primary entrance is comprised of a single-leaf, 15-light, wood with a wrought iron storm door flanked by 5-light sidelights. The house features 1/1, wood, double-hung sash windows with storm windows. There is a one-story, projecting, squared bay surmounted by a shed roof on the east elevation that features paired, double-hung sash windows. There is a gable-roofed dormer that features paired, double-hung sash windows and wide eaves on the facade. The roof is side gable clad in asphalt shingles. The house features an interior, brick chimney on the east elevation and an exterior brick chimney on the west elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement and constructed circa 1920. It incorporates a wood frame structural system clad in vertical board. The garage features double-leaf, vertical board doors. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **416 35th Street**
PROPERTY NAME: House, 416 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0976
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a dentiled cornice; wood, Tuscan columns; and turned balusters. The primary entrance is comprised of a single-leaf door with a wrought iron storm door surmounted by a diamond-paned transom and flanked by diamond-paned sidelights. The house features 1/1, metal, double-hung sash windows. There is a two-story, projecting, canted bay on the east end of the façade. The facade gable is closed and features a Palladian window comprised of a wood, 1/1, double-hung sash window with a rounded arch upper sash flanked by 1/1, wood, double-hung sash windows. There is an intersecting, closed gable on the west elevation. There is a two-story, projecting, canted bay surmounted by a closed gable on the east elevation. The roof is cross-gable clad in asphalt shingles. The house features an interior, brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **418 35th Street**
PROPERTY NAME: House, 418 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-0977
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1919. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and turned

balusters. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door. The house features 6/6, metal, double-hung sash windows. The facade gable is closed and features paired, 1/1, metal, double-hung sash windows. There is an intersecting, closed gable on the west elevation. The roof is gable clad in asphalt shingles. The house features an interior, brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **419 35th Street**
PROPERTY NAME: House, 419 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-0978
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a dentiled cornice; wood, Tuscan columns; and turned balusters. The primary entrance is comprised of a single-leaf door surmounted by a diamond-paned transom and flanked by diamond-paned sidelights. The house features 1/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, canted bay on the east end of the façade. The facade gable is closed and features a Palladian window comprised of a wood, 1/1, double-hung sash window with a rounded arch upper sash flanked by Queen Anne, wood, double-hung sash windows. There is an intersecting, closed gable on the west elevation. There is a two-story, projecting, canted bay surmounted by a closed gable on the east elevation. The roof is cross-gable clad in asphalt shingles. The house features an interior, parged brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **420 35th Street**
PROPERTY NAME: House, 420 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0979
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1920. It incorporates a parged brick foundation and a brick structural system. The rear ell of the house is frame clad in vinyl siding. The south façade features a two-story porch incorporated under a shed roof extending from the main roof. The first story porch features two bays; a false, asphalt-shingled, hip roof with flared eaves, which also forms the second story balustrade; and brick piers and balustrade. The second story porch has been screened and features exposed, wood rafters under the eaves. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door flanked by wood panels. The house features 1/1, wood, double-hung sash windows with storm windows. There is a metal fire stair appended to the east elevation, and a two-story projecting bay surmounted by a shed roof. There is a single-leaf door on the west elevation. There is an asbestos-clad, gable-

roofed dormer that features paired, double-hung sash windows and exposed, wood rafters under the eaves on the facade. The roof is side gable clad in asphalt shingles. The house features an exterior, brick chimney on the east elevation. The chimney has been parged above the roofline.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **424 35th Street**
PROPERTY NAME: House, 424 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0980
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and a brick structural system. The south façade features a two-story porch incorporated under a shed roof extending from the main roof. The first story porch features two bays; a false, vinyl-over an asphalt-shingled, hip roof with flared eaves, which also forms the second story balustrade; and brick piers and balustrade. The second story porch features two bays, and paired, wood posts. The primary entrance is comprised of a single-leaf, metal, paneled door. The house features 6/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, squared bay surmounted by a shed roof on the east elevation. There is a gable-roofed dormer on the façade that features paired, double-hung sash windows and exposed, wood rafters under the eaves. The roof is side gable clad in asphalt shingles. The house features an exterior, brick chimney on the east elevation. The chimney has been parged above the roofline.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **425 35th Street**
PROPERTY NAME: Office Building, 425 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1958
DHR NUMBER (S): 122-5087-0981
DESCRIPTION (S):
This is a one-story office building designed in the Modern Movement style and constructed in 1958. It incorporates a concrete slab foundation and a concrete block structural system clad in brick veneer and vertically-hung plywood. The primary entrance is incorporated under the main roof on the northwest corner. The building features 1/1, metal, double-hung sash windows. There is a one-story ell appended to the south end of the west elevation. The ell features a single-leaf, metal door with a light. The roof is a low-raking gable clad in asphalt shingles with wide eaves.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **427 35th Street**
PROPERTY NAME: Office Building, 427 35th Street
OTHER NAME (S): Commercial Building, 427 35th Street

CONSTRUCTION DATE: 1925
DHR NUMBER (S): 122-5087-0982
DESCRIPTION (S):
This is a two-story office building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1925. It incorporates a brick foundation and a stuccoed brick structural system. The building faces west. The west façade features a centrally located entrance comprised of double-leaf, plate glass doors surmounted by plate glass windows. The building features fixed, metal and 1/1, metal, double-hung sash windows. The double-hung sash windows on the east and west elevations features round arch details surmounting the upper sash. There are applied cornices above and below the first and second story windows. There is a metal stair appended to the east elevation. The roof is flat with a parapet with a parapet coped in metal. This is a former store that has been heavily altered.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **432 35th Street**
PROPERTY NAME: House, 432 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0983
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; a boxed cornice; wood, Tuscan columns; and turned balusters. The east end of the porch has been screened and features a single-leaf, screen door on the east elevation. The primary entrance is comprised of a single-leaf, wood, 12-light door surmounted by a 10-light transom and flanked by 8-light sidelights. The house features 9/1, wood, double-hung sash windows. There are two, one-story, projecting, canted bays on the second story façade. There is a one-story, projecting, canted bay surmounted by a closed gable on the second story of the east elevation. The closed gable features a wood, double-hung sash window. There are two hip-roofed dormers on the façade that feature 9/1, wood, double-hung sash windows. The roof is hipped clad in slate shingles with wide eaves.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in asbestos siding. The roof is clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **436 35th Street**
PROPERTY NAME: House, 436 35th Street
OTHER NAME (S): Carlos A. Howard, Funeral Home
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0984
DESCRIPTION (S):

This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1920. It incorporates a stuccoed brick foundation and a stuccoed brick structural system. The south façade features a one-story, enclosed porch with an asphalt-shingled, hipped roof with exposed wood, rafters; stuccoed piers and balustrade; and porch openings filled with metal windows surmounted by cloth awnings. There is a cloth awning surmounting the porch entrance that is inscribed "Carlos Howard Funeral Home." The primary entrance is comprised of a single-leaf, wood door flanked by sidelights. The second story façade windows are fixed and metal surmounted by cloth awnings. The house features 6/1, wood, double-hung sash windows with storm windows. There are gable-roofed wall dormers on the east and west elevations that feature paired, double-hung sash windows and brackets under the rakes. There is a gable-roofed wall dormer on the façade that features a Palladian window of a 6/1, wood, double-hung sash window flanked by smaller, 6/1, wood, double-hung sash windows; and brackets under the rakes. The north elevation features a tripartite, 6/1, wood, double-hung sash window. Some of the windows on the north elevation have been enclosed. There is an intersecting, hip roof on the north elevation. There is a one-story ell appended to the west elevation. The ell has been stuccoed and features 8/8, wood, double-hung sash windows; and an asphalt-shingled, hipped roof with a boxed cornice. There is a two-car garage appended to the north elevation. The garage incorporates a concrete slab foundation and a concrete block structural system with a flat roof coped in metal. The garage features two, roll-up doors. The roof is hipped clad in asphalt shingles with exposed, wood rafters under the eaves. The house features an exterior, stuccoed chimney on the east elevation and a central, interior, stuccoed brick chimney. This house is currently functioning as a funeral home.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **500 35th Street**
PROPERTY NAME: Store, 500 35th Street
OTHER NAME (S): Colonial Pawn Shop
CONSTRUCTION DATE: 1959-1960
DHR NUMBER (S): 122-5087-0985
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1959-1960. It incorporates a concrete slab foundation and a concrete block structural system. The south façade is clad in brick veneer. The primary entrance is centrally located and is comprised of double-leaf, plate glass and metal doors flanked by fixed, plate glass, storefront windows. There is a Streamline Moderne, metal overhang that shelters the façade and extends around the east elevation. The roof is flat with a parapet coped in metal.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **512 35th Street**
PROPERTY NAME: Store, 512 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1959
DHR NUMBER (S): 122-5087-0986
DESCRIPTION (S):

This is a one-story store designed in the Modern Movement style and constructed in 1959. It incorporates a concrete slab foundation and a concrete block structural system. The south façade is clad in brick veneer. The primary entrance is comprised of a single-leaf, metal door with a boarded light that is recessed from the façade. The window openings on the south façade have been covered with vertically-hung board. The east and west elevations features metal, sliding windows. Shutters flank the window on the east elevation. There is a shed-roofed, metal overhang supported by metal posts appended to the west elevation. The roof is flat with a parapet coped in metal.

- This is a one-story canopy designed in the Modern Movement style and constructed circa 1960. It incorporates a concrete slab foundation and a flat roof supported by a metal beam. The canopy shelters three gas pumps and exhibits lighting fixtures.
- This is a one-story garage designed in the Modern Movement style and constructed circa 1960. It incorporates a concrete slab foundation and a concrete block structural system. The garage features roll-up, metal doors on the east and west elevations.

NON-CONTRIBUTING (2 - buildings)
NON-CONTRIBUTING (1 - structure)

PROPERTY ADDRESS: **513 35th Street/513-517 35th Street**
PROPERTY NAME: Store, 513 35th Street
OTHER NAME (S): Ebony Florist/Alice's Soul Food
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-0987
DESCRIPTION (S):
This is a one-story store designed in the Late 19th and Early 20th Century American Movement style and constructed in 1915. It incorporates a concrete slab foundation and a parged brick structural system. The north façade is comprised of three storefronts. The west storefront features a single-leaf, wood, paneled door that is recessed from the façade. The original window openings have been filled with vinyl siding punctuated by octagonal windows and an air conditioning unit. The central storefront features a single-leaf, recessed entrance flanked by fixed, metal and industrial, metal sash windows. Portions of the original window openings have been filled with vinyl siding. The east storefront features a recessed, single-leaf, wood door with a storm door. The entrance is flanked by fixed, metal storefront windows that have been partially filled with vertical board. The east storefront is surmounted by glass block. Projecting, brick piers divide each of the storefronts. The roof is flat with a stepped parapet on the east and west elevations. The parapet is coped in a rowlock brick course.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **519 35th Street**
PROPERTY NAME: Store, 519 35th Street
OTHER NAME (S): The Cooke and May Building/The Cage Conference Center
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0988

DESCRIPTION (S):
This is a two-story store designed in the Late 19th and Early 20th Century American Movement style and constructed in 1912. It incorporates a concrete slab foundation and a brick structural system. The first story is clad in brick veneer and the second story is clad in vinyl siding. The north façade features two, single-leaf, plate glass doors surmounted by transoms. The east entrance is flanked by sidelights. The first story features metal, plate glass, storefront windows with rowlock brick sills. The second story features 6/6, metal, double-hung sash windows. The building has a catslide roof clad in slate shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **523 35th Street**
PROPERTY NAME: Store, 523 35th Street
OTHER NAME (S): Rose of Sharon Revival Center
CONSTRUCTION DATE: 1946
DHR NUMBER (S): 122-5087-0989
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1946. It incorporates a concrete slab foundation and a brick structural system. The north facade is clad in brick veneer. The primary entrance is centrally located and is recessed from the façade. The entrance is comprised of double-leaf, metal doors surmounted by a board transom. The store features a metal, plate glass, storefront window. A metal gate has been applied over the primary entrance and windows on the façade. There is a single-leaf, metal door on the east end of the façade. There is a Streamline Moderne, metal overhang surmounting the storefront. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **527 35th Street**
PROPERTY NAME: Store, 527 35th Street
OTHER NAME (S): Carmen's
CONSTRUCTION DATE: 1925
DHR NUMBER (S): 122-5087-0990
DESCRIPTION (S):
This is a one-story store designed in the Late 19th and Early 20th Century American Movement style and constructed in 1925. It incorporates a concrete slab foundation and a brick structural system. The north facade is clad vinyl siding. The primary entrance is centrally located and is recessed from the façade. The entrance is comprised of a single-leaf door with a storm door. The original storefront windows have been filled and clad in vinyl siding and are punctuated by fixed, metal, 6-light windows. The windows on the west elevation have been filled with brick. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **528 35th Street**
PROPERTY NAME: Store, 528 35th Street

OTHER NAME (S): Cooke's Moving/May's Radio & TV Service
CONSTRUCTION DATE: 1950
DHR NUMBER (S): 122-5087-0991
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1950. It incorporates a concrete slab foundation and a concrete block structural system. The north facade is clad brick veneer. The primary entrance is recessed from the façade and is comprised of a single-leaf, metal door. The original storefront windows have been filled with vertical board and are punctuated by a fixed, metal, multiple-light window. The windows on the west elevation are metal, industrial sash. The store features a brick soldier-course at the roofline. The roof is flat with a parapet coped in metal. A metal sign is applied to the façade above the primary entrance.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **530 35th Street**
PROPERTY NAME: Store, 530 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1923
DHR NUMBER (S): 122-5087-0992
DESCRIPTION (S):
This is a one-story store designed in the Late 19th and Early 20th Century American Movement style and constructed in 1923. It incorporates a concrete slab foundation and a brick structural system. The south façade is comprised of three storefronts. The west storefront features a single-leaf, plate glass door surmounted by a transom. The entrance is recessed from the façade and is flanked by plate glass display cases with tiled watertables. The central storefront features a single-leaf, recessed door flanked by boarded storefront windows. The east storefront features a recessed, single-leaf door flanked by storefront windows that have been filled with vertical board. Patterned brickwork panels surmounts each storefront and divides each storefront on the façade. The building features a corbelled cornice. The roof is flat with a stepped parapet coped in a rowlock brick course.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **531 35th Street**
PROPERTY NAME: Store, 531 35th Street
OTHER NAME (S): 35th Street Market/Commercial Building, 531 35th Street
CONSTRUCTION DATE: 1931
DHR NUMBER (S): 122-5087-0133 122-0925
DESCRIPTION (S):
This is a one-story store designed in the Late 19th and Early 20th Century American Movement style and constructed in 1931. It incorporates a brick foundation and a brick structural system. The north façade is clad in rusticated stone veneer. The storefront has been filled with concrete block and features a centrally located, single-leaf, metal, 6-panel door. The roof is flat with a stepped, rusticated stone parapet. The parapet is coped

in a rowlock brick course on the east and west elevations.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **533 35th Street**
PROPERTY NAME: Store, 533 35th Street
OTHER NAME (S): The Church of the Lord Jesus Christ of the Apostle Faith, Inc.
CONSTRUCTION DATE: 1925
DHR NUMBER (S): 122-5087-0993
DESCRIPTION (S):
This is a one-story store designed in the Late 19th and Early 20th Century American Movement style and constructed in 1925. It incorporates a concrete slab foundation and a brick structural system. The north façade features two, centrally located entrances comprised of single-leaf, wood doors with two lights surmounted by transoms. The east entrance features a wood, screen door. The east end storefront windows have been filled with vertical board punctuated by an octagonal window. The east end of the façade has been filled with concrete block. There is a Streamline Modern, metal overhang surmounting the storefront. The roof is flat with a parapet coped in a rowlock brick course.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **534 35th Street**
PROPERTY NAME: Store/Dwelling, 534 35th Street
OTHER NAME (S): Brown's Community Discount Music Center
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0994
DESCRIPTION (S):
The storefront was applied to the façade of a single-family dwelling located to the north circa 1930. The dwelling, constructed in 1912, has a brick foundation and wood frame structural system. The style appears to be Craftsman. The dwelling is clad in vinyl siding and is surmounted by an asphalt-shingled side gable roof. A shed-roofed dormer is visible on the façade. The building features two interior, brick chimneys.

- This is a one-story store/dwelling designed in the Late 19th and Early 20th Century American Movement style and constructed in 1912 with a storefront addition dating to circa 1930. The storefront incorporates a brick foundation and structural system. The south façade is has been stuccoed. The north façade features two entrances. The east entrance is comprised of a single-leaf, wood, paneled door with three lights surmounted by a stuccoed transom. The west entrance is comprised of a single-leaf, wood doors with multiple lights and a storm door flanked by metal, plate glass, storefront windows. Glass block is located above and below the storefront windows. Vertical board surmounts the storefront. The roof is flat with a parapet.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **536 35th Street**

PROPERTY NAME: Store, 536 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1924
DHR NUMBER (S): 122-5087-0995
DESCRIPTION (S):
This is a one-story store designed in the Late 19th and Early 20th Century American Movement style and constructed in 1924. It incorporates a brick foundation and structural system clad in brick veneer. The south façade features a centrally located entrance recessed from the façade. The entrance is comprised of a single-leaf, metal door with a light and a wrought iron storm door. The entrance is flanked by storefront windows that have been filled with plywood. The plywood-clad storefront windows are punctuated by fixed, wood windows covered by metal screens. The roof is flat with a parapet coped in a rowlock brick course. The building features an interior, brick chimney on the north elevation. There is a one-story, concrete block ell appended to the north elevation. The ell features a flat roof with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **537 35th Street**
PROPERTY NAME: Store, 537 35th Street
OTHER NAME (S): Brad Con Int'l Hair Studio & De'Resort
CONSTRUCTION DATE: 1949
DHR NUMBER (S): 122-5087-0996
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1949. It incorporates a brick foundation and structural system. The north façade is clad in rusticated stone veneer and the west elevation has been stuccoed. The north façade features a recessed storefront. The primary entrance is comprised of a single-leaf, plate glass door flanked by sidelights. Portions of the storefront have been filled with vertical board punctuated by metal, storefront windows. A projecting, metal overhang surmounts the storefront on the façade. There is an oversized, plate glass window surmounted by a cloth awning on the west elevation at the north corner. The roof is flat with a parapet coped in a rowlock brick course. The building features an interior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **538 35th Street**
PROPERTY NAME: Store, 538 35th Street
OTHER NAME (S): Commercial Building, 538 35th Street
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-0103 122-0931
DESCRIPTION (S):
This is a two-story store designed in the Late 19th and Early 20th Century American Movement style and constructed in 1915. It incorporates a brick foundation and structural system. The primary entrance is located on the canted, southwest corner of the first story and is comprised of a single-leaf, metal door. There is a large

storefront window opening occupying the first story south façade. There is a storefront window on the west elevation near the south corner. The entrance on the canted wall has been partially filled with vertical boards. There are clerestory windows on the west elevation adjacent to the storefront window. Three single-leaf entrances occupy the north portion of the west elevation. The window and door openings on the first story have been boarded or filled with vertical boards. The second story features 6/6, wood, double-hung sash windows with storm windows and rowlock brick sills. Many of the second story windows have been boarded. The closed, façade and north elevation gables are clad in wood shingles and feature boarded windows. The roof is gable clad in slate shingles with a boxed cornice. The building features four, interior, brick chimneys with corbelled caps on the west elevation and an interior, brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **600-608 35th Street**
PROPERTY NAME: Newport Plaza & Theatre
OTHER NAME (S): Self Improvement Educational Center/Freedom Distributor/The Shoe Man
CONSTRUCTION DATE: 1930
ARCHITECT: A. O. Ferebee
DHR NUMBER (S): 122-5087-0104 122-0930
DESCRIPTION (S):
This is a two-story theatre designed in the Modern Movement style and constructed in 1930. It incorporates a concrete slab foundation and concrete block structural system clad in brick veneer. The east façade features three bays reinforced by three window and door groupings on the first story surmounted by panels and the parapet on the roof with piers dividing false shed roofs. There are two single-leaf entrances at the south end of the east façade within a recessed brick panel. The doors have wrought iron storm doors covering them. Surmounting the entrances is a parged rounded-arch panel with articulated keystone. The central bay on the east elevation is comprised of a blank, recessed brick panel surmounted by a rectangular, parged brick panel. The north bay features storefront windows that have bar applied over them. The second story windows on the east façade have an irregular grouping and are 1/1, metal, double-hung sash with rowlock brick sills. The east end of the roof is flat, which is connected to a gabled portion on the west housing the theater space. The gable roof at the west end has a parapet wall coped in concrete.

- This is a two-story store designed in the Modern Movement style and constructed in 1930. It incorporates a concrete slab foundation and concrete block structural system clad in brick veneer. The first story features multiple storefronts. In addition to the storefronts there are single-leaf door openings leading to stairwells accessing the second story. The southeast corner of the building is canted and features double-leaf, plate doors with bars surmounted by a common transom. The door and transom are framed in a soldier- and stretcher-course brick frame. There is a window on the second story of the canted wall. The parapet above the caned wall is rounded with solider-course bricks and a blank panel. The first story east elevation features two brick bays on the first story comprised of recessed brick panels. The windows within the bays are tripartite with metal frames and plate glass. The storefronts on the south elevation feature recessed, single-leaf, plate glass doors, and fixed, metal framed, plate glass windows. Bars have been applied over the windows. The storefronts are surmounted by recessed

brick panels partially covered with late 20th century metal-framed, lighted signs. There are doors on the south elevation near the east and west corners that have rounded arch transoms, which gain access to the second story. The second story features individual and paired, 1/1, metal, double-hung sash windows with rowlock brick sills. The roof is flat with a parapet coped in a rowlock brick course and corbelled brick cornice. There is a large, vertically oriented, metal-framed sign reading: "NEWPORT PLAZA" appended to the second story of the south elevation at the east corner near the canted southeast corner.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **610 35th Street**
PROPERTY NAME: Store, 610 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: circa 1970
DHR NUMBER (S): 122-5087-0878
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed circa 1970. It incorporates a concrete slab foundation and a concrete block structural system. The south façade is clad in brick veneer and the side elevations have been partially parged. The primary entrance is recessed from the façade and is comprised of a single-leaf, metal door with a wrought iron storm door. The building features fixed, wood, storefront windows with metal bars and rowlock brick sills. There is a single-leaf, metal door on the east elevation. The roof is flat with a stepped parapet coped in metal on the side elevations. The façade features a corbelled cornice coped in a rowlock brick course.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **611 35th Street**
PROPERTY NAME: Store, 611 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-0879
DESCRIPTION (S):
This is a one-story store designed in the Late 19th and Early 20th Century American Movement style and constructed in 1917. It incorporates a concrete slab foundation and parged brick structural system. The primary entrance is centrally located on the north façade. The entrance is comprised of double-leaf, plate glass doors surmounted by a transom and flanked by fixed, metal, storefront windows. The storefront is framed by stack bond and soldier course bond bricks. Tilework is features below the storefront windows and above the storefront. The stack bond brick course flanking the storefront extends to the soldier course cornice at the façade roofline. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **612 35th Street**
PROPERTY NAME: Bank, 612 35th Street

OTHER NAME (S): Masjid (Mosque) William Salaam
CONSTRUCTION DATE: 1948
DHR NUMBER (S): 122-5087-0880
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1948. It incorporates a concrete slab foundation and a 5-course, American bond brick structural system. The south façade has been stuccoed. The primary entrance is recessed from the façade and is comprised of a double-leaf, wood door with two vertical lights and a fan-shaped light flanked by sidelights. The building features fixed, metal windows on the facade. The side elevation windows have been filled with concrete block. The roof is flat with a parapet coped in metal. The building features square towers on each end of the façade. The towers feature blank, round-arch lanterns and are surmounted by small lanterns.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **613 35th Street**
PROPERTY NAME: Store, 613 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1928
DHR NUMBER (S): 122-5087-0997
DESCRIPTION (S):
This is a one-story store designed in the Late 19th and Early 20th Century American Movement style and constructed in 1928. It incorporates a brick foundation and structural system. The north façade is parged. The north façade is three bay and comprised of three storefronts divided by pilasters. The west storefront entrance is recessed from the façade and is comprised of a single-leaf, plate glass door surmounted by a transom and flanked by plate glass, storefront windows. The central storefront has been bricked and features a central entrance flanked by glass block windows. The entrance is comprised of a single-leaf, metal framed, plate glass door surmounted by a transom. The east storefront entrance has also been bricked and features a single-leaf entrance on the east end and glass block windows. The east and west storefronts features glazed tile bases under the storefront windows. There are oversized, metal vents on the west elevation. The roof is flat with a parapet.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **617-619 35th Street**
PROPERTY NAME: Store/Dwelling, 617-619 35th Street
OTHER NAME (S): Elsinore Apartments/Royal Cut/Commercial Building,617-619 35th Street
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-0105 122-0927
DESCRIPTION (S):
This is a two-story store/dwelling designed in the Late 19th and Early 20th Century American Movement style and constructed in 1917. It incorporates a concrete slab foundation and a 6-course, American bond brick structural system. The north façade features a centrally located, single-leaf, metal, paneled door with a fan-shaped light surmounted by a transom, which is surmounted by a fanlight. The door is flanked by two

storefronts. The storefronts feature centrally located, single-leaf, plate glass doors flanked by plate glass, storefront windows. Parged brick panels and a soldier-course brick beltcourse surmount the storefronts. The second story façade features paired, 1/1, metal, double-hung sash windows surmounted by brick flat arches with articulated keystones and rowlock brick sills. The windows are also surmounted by brick panels featuring a brick, diamond motif. There is a three-light, wood, casement window surmounting the central entrance. The second story of the east and west elevations features individual, paired, and tripartite, 1/1, metal, double-hung sash windows with rowlock brick sills. The building features a corbelled cornice exhibiting soldier- and header-brick courses. The roof is flat with a stepped parapet on the east and west elevations. The parapet is coped in a rowlock brick course. The building features a chimney embedded in the south elevation wall.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **622 35th Street**
PROPERTY NAME: Store, 622 35th Street
OTHER NAME (S): New Hope
CONSTRUCTION DATE: 1948
DHR NUMBER (S): 122-5087-0998
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1948. It incorporates a concrete slab foundation and concrete block structural system. The south façade is clad in parged brick veneer and the east elevation is clad in vinyl siding. The primary entrance is comprised of a single-leaf, wood, paneled door surmounted by glass block. The original storefront windows have been filled and parged. Glass block windows punctuate the parged storefront windows. The roof is flat with a parapet. There is an asphalt-shingled, gable-roofed addition appended to the north elevation. The addition incorporates a wood frame structural system clad in vinyl siding. The addition features two, interior brick chimneys and a single-leaf, metal door on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **623 35th Street**
PROPERTY NAME: Apartment Building, 623 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1985
DHR NUMBER (S): 122-5087-0999
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1985. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The primary entrance to the building is comprised of a centrally located, wood stair projecting from the façade. The stair is sheltered by a shed roof extending from the main roof. There are four entrances on the north façade. The entrances are comprised of single-leaf, metal, paneled doors. The building features individual and paired, 1/1, metal, double-hung sash windows. The first story windows feature rowlock brick sills. The roof is side gable clad in asphalt shingles.

NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **624 35th Street**
PROPERTY NAME: House, 624 35th Street
OTHER NAME (S): Store/Dwelling, 624 35th Street
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1000
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system. Appended to the south façade is a two-story addition featuring a storefront on the first story. The storefront features a single-leaf, plate glass door surmounted by a boarded transom on the west end which accesses the second story. The east end of the façade features a recessed storefront comprised of a single-leaf, wood door with a light and a screen door surmounted by a transom and flanked by storefront windows. Portions of the storefront windows have been filled with wood panels. Glass block windows surmount the east end storefront. The first story storefront is clad in brick veneer. The second story of the storefront addition is clad in vinyl siding. The second story of the dwelling is clad in wood shingles and the first story is clad in vinyl siding. The house features individual and paired, 6/6 and 9/1, wood, double-hung sash windows with storm windows. The roof is gable clad in asphalt shingles. The house features an interior, brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **628-636 35th Street**
PROPERTY NAME: Rosna Theatre
OTHER NAME (S): St. Andrew's Church of God in Christ
CONSTRUCTION DATE: 1942
DHR NUMBER (S): 122-5087-0106 122-0929
DESCRIPTION (S):
This is a one-story theatre designed in the Moderne style and constructed in 1942. It incorporates a concrete slab foundation and a 5-course, American bond brick structural system clad in brick veneer. The east end of the south façade features the main entrance to the theatre and the west end contains three storefronts. The main theatre entrance is comprised of a single-leaf, plate glass door flanked by glass block sidelights and surmounted by a transom. Two, double-leaf, metal entrances flank this central entrance. There are plate glass, movie poster display cases on the south façade flanking the theatre entrances. There is a single-leaf wood door with a light on the east end of the façade. A canted, projecting, metal sign surmounts the theatre entrances featuring a space for movie listings. Surmounting the sign is a parapet with polychrome brick stringcourses and pavilioned ends. The west end storefronts feature single-leaf, wood and plate glass doors surmounted by transoms; and plate glass, storefront windows. The storefronts are flanked and surmounted by polychrome, brick string courses and divided by banded piers. The north portion of the building exhibits a taller roofline than the south portion of the building and contains the theatre space. The west elevation features two, single-leaf, metal doors; a double-leaf, metal door; and a metal, roll-up garage door. The building exhibits a flat roof with a parapet. The parapet of the

south portion of the building is coped in two courses of rowlock bricks. The north portion of the building features a parapet coped in metal. The building features a chimney embedded in the west elevation wall of the north portion of the building. The building is currently functioning as a church.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **631 35th Street**
PROPERTY NAME: Store, 631 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1949
DHR NUMBER (S): 122-5087-1002 122-5087-0107
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1949. It incorporates a concrete slab foundation and a parged concrete block structural system. The north façade is clad in brick veneer and features a storefront. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a metal awning. The building features fixed, metal, storefront windows. The lower portion of the window openings have been filled with plywood. Glass block windows and a soldier brick course surmount the windows on the façade. The façade features brick piers that divide the entrance from the windows and frame the building. The roof is flat with a parapet coped in header- and solider-course brick on the façade and metal coping on the east elevation. This building was previously surveyed a part of the adjacent building to the west (122-5087-0107/122-0928 633-635 35th Street).
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **633-635 35th Street**
PROPERTY NAME: Store, 633-635 35th Street
OTHER NAME (S): Luhring's Religious Book Store (635), Hines-Carter Florists (635), 35th Street Corp. (631)/Commercial Building, 633-635 35th Street
CONSTRUCTION DATE: 1948
DHR NUMBER (S): 122-5087-0107 122-0928
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1948. It incorporates a concrete slab foundation and a parged concrete block structural system. The north façade is clad in brick veneer and features two storefronts separated by brick pilasters. The building has three bays. The entrances to the storefronts are centrally located and are flanked by storefront windows. The east storefront is comprised of a single-leaf, metal door; and vinyl-clad storefront windows punctuated by fixed, vinyl windows surmounted by glass block on the east and aluminum siding on the west. The west storefront is comprised of a single-leaf, wood, 6-panel door surmounted by a transom with an air conditioning unit; and vinyl-clad storefront windows punctuated by vinyl, fixed windows surmounted by glass block. The west entrance is comprised of a single-leaf, wood door with a storm door surmounted by a transom with an air conditioning unit. Brick pilasters exhibiting a stack, soldier-course bond flank the two entrances. There is an addition appended to the east of the building featuring a similar storefront. It exhibits a canted, single-leaf entrance with a solid wood door

surmounted by a boarded transom. To the west is a storefront window that has been filled with the vinyl siding. The siding is punctuated by two fixed windows. Surmounting the storefront and door are glass block windows. The pilaster at the east end is narrow. The roof is flat with a parapet coped in rowlock- and soldier-brick courses.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **637 35th Street**
PROPERTY NAME: House, 637 35th Street
OTHER NAME (S): Islamic Information Center of Norfolk/Duplex, 637 35th Street
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-1003
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1910. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a boxed cornice; a wide frieze; square, wood columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door surmounted by a transom. The house features 1/1, wood, double-hung sash windows. The façade gable features a 1/1, wood, double-hung sash window with a round arch upper sash; and vergeboards at the roof apex. The roof is gable clad in asphalt shingled with exposed, wood rafters under the eaves. The house features an interior, brick chimney with a corbelled cap on the east elevation. This building has been converted to a duplex.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **641 35th Street**
PROPERTY NAME: House, 641 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1925
DHR NUMBER (S): 122-5087-1004
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1925. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch incorporated under a shed roof extending from the main roof. The porch features wood, Tuscan columns and has been screened. The primary entrance is comprised of a single-leaf door with a wrought iron storm door surmounted by a transom and flanked by sidelights. The house features 1/1, wood, double-hung sash windows with storm windows. There is a single-leaf door with a storm door on the west elevation. There is an oversized, gable-roofed dormer on the façade that is surmounted by a closed gable. The closed gable features a metal, louvered vent and a raking cornice. The roof is side gable clad in asphalt shingles with cornice returns on the south end of the side elevations. The house features an interior, parged brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **645 35th Street**
PROPERTY NAME: House, 645 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1005
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in weatherboard. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door. The house features 12/1, wood, double-hung sash windows. There is a one-story, projecting, canted bay surmounted by an intersecting gable on the west elevation. The façade gable features a tripartite window of a 6-light, wood, casement window flanked by 4-light, wood, casement windows. The roof is gable clad in asphalt shingles with exposed, wood rafters under the eaves. The house features a central, interior, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **703 35th Street**
PROPERTY NAME: Duplex, 703 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1006
DESCRIPTION (S):
This is a two-story duplex designed in the Late 19th and Early 20th Century American Movement style and constructed in 1917. The north façade features a two-story, one-bay porch with an asphalt-shingled, gable roof; wood, piers resting on brick pedestals; and turned balusters. There is an entrance located on the east end of the façade which is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a storm door surmounted by a metal overhang appended to the two-story porch on the west. The porches are accessed by single-leaf, metal paneled doors with storm doors. The porch is surmounted by a closed gable clad in fishscale-cut, vinyl siding and features a 1/1, vinyl, double-hung sash window. The house features individual and paired, 1/1, vinyl, double-hung sash windows. Non-functional shutters flank the windows on the east and west elevations. The roof is hipped clad in asphalt shingles. The west elevation wall features an exterior chimney, which has been removed above the roofline.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **706 35th Street**
PROPERTY NAME: House, 706 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-1007

DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1921. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch incorporated under the main roof. The porch features asbestos-clad, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal door with a storm door surmounted by a 6-light transom and flanked by 4-light sidelights. The house features paired, 6/1, wood, double-hung sash windows with storm windows; and 1/1, metal, double-hung sash windows. There is a one-story, projecting, canted bay on the east elevation. There is an oversized, hip-roofed dormer on the façade. The roof is side gable clad in asphalt shingles with wide eaves.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **707 35th Street**
PROPERTY NAME: House, 707 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1008
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in weatherboard. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; battered, wood piers; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door surmounted and flanked by wood panels. The house features 1/1, metal, double-hung sash windows. There is a one-story, projecting, squared bay surmounted by a hipped roof on the west elevation. The roof is hipped clad in asphalt shingles with a wide frieze. There is a one-story porch appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **708 35th Street**
PROPERTY NAME: House, 708 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-1009
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1921. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, two-bay porch incorporated under the main roof. The porch features battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood door with a light and a storm door surmounted by a 6-light transom and flanked by 4-light sidelights. The house features 1/1, 9/1, and 12/1, wood, double-hung sash windows with storm windows. There is a one-story, projecting, canted bay on the west elevation. There is an oversized, shed-roofed dormer on the façade that features paired, metal 1/1, double-hung sash windows. The roof is side gable clad in asphalt shingles with wide eaves. The

house features an interior, parged brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **711 35th Street**
PROPERTY NAME: House,711 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1010
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features battered, wood piers resting on brick pedestals; a metal awning; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door. The house features 1/1, metal, double-hung sash windows. There is a hip-roofed dormer on the façade featuring an enclosed second story porch. The second story porch has been enclosed with 1/1, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles with brackets under the rakes. There is a dormer on the south elevation. The house features an interior, brick chimney on the west elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in vinyl siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **712 35th Street**
PROPERTY NAME: Store, 712 35th Street
OTHER NAME (S): Betty's Den
CONSTRUCTION DATE: 1978
DHR NUMBER (S): 122-5087-1011
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1978. It incorporates a concrete slab foundation and a concrete block structural system clad in brick veneer. The south façade features two entrances comprised of single-leaf, plate glass doors surmounted by transoms. There is a single-leaf, metal door on the west elevation. The building features fixed, metal, plate glass windows with rowlock brick sills on the façade. The roof is flat with a false, asphalt-shingled mansard roof appended to the façade and west elevation.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **713 35th Street**
PROPERTY NAME: House, 713 35th Street

OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1012
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north facade features a one-story, one-bay porch incorporated under the main roof. The porch features brick piers; and turned balusters. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door. The house features individual and tripartite, 1/1, metal, double-hung sash windows. There is an oversized, gable-roofed dormer on the façade that features brackets under the rakes. The roof is side gable clad in asphalt shingles with wide eaves. The house features a central, interior, brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **715 35th Street**
PROPERTY NAME: House, 715 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1013
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1918. It incorporates a parged brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a wide frieze; square, wood columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door flanked by sidelights with a light and wood panels. The house features 1/1, vinyl, double-hung sash windows. The roof is hipped clad in slate shingles with a wide frieze. The house features an interior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **716 35th Street**
PROPERTY NAME: House, 716 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-1014
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1906. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The west end of the south façade features a one-story, one-bay porch with an asphalt-shingled shed roof; wood, turned posts; and a plain, wood balustrade. The east end of the façade features a two-story, projecting, squared bay surmounted by a gable. The gable is clad in wood shingles and features a 2/2, wood, double-hung sash window; a wide frieze; and cornice returns. The primary entrance is comprised of a single-leaf door with a wrought iron storm door

surmounted by a transom and flanked on the west by a wood paneled sidelight. The house features 1/1, wood, double-hung sash windows with storm windows. The west elevation features a projecting, square block surmounted by a gable clad in wood shingles that features a double-hung sash window and cornice returns. The roof is hipped-cross-gable clad in asphalt shingles with a wide frieze and boxed cornice. There is a one-story porch appended to the northwest corner of the house that features wood, turned posts. There is a shed-roofed ell appended to the north elevation. The house features two, interior, parged brick chimneys with corbelled caps on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **717 35th Street**
PROPERTY NAME: House, 717 35th Street
OTHER NAME (S): Duplex, 717 35th Street
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-1015
DESCRIPTION (S):
This is a two-story Bungalow constructed in 1919. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, one-bay porch with an asphalt-shingled gable roof; battered, wood piers resting brick pedestals; and a vinyl-clad balustrade. The primary entrance is comprised of a single-leaf, wood door with multiple lights and a storm door. The house features individual and paired, 1/1, metal, double-hung sash windows. The façade gable features an octagonal-shaped, louvered vent and brackets under the rakes. There is a one-story, projecting, canted bay on the east elevation. There is a wood stair appended to the east elevation accessing the second story of the house. The roof is side gable clad in asphalt shingles with brackets under the rakes.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **723 35th Street**
PROPERTY NAME: House, 723 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1016
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features wood, Tuscan columns resting on battered, brick pedestals; and turned balusters on the west elevation. The primary entrance is comprised of a single-leaf, wood door with three lights and a storm door. The house features individual and paired, 6/6, wood, double-hung sash windows with storm windows. The east end of the façade features a one-story, projecting, canted bay. The canted walls feature wood, double-hung sash, Queen Anne windows with storm windows. There is a one-story, projecting, squared bay on the east elevation that is surmounted by an intersecting Jerkinhead gable. The façade gable features an 8-light, wood casement window and brackets under the rakes. The roof is Jerkinhead gable clad in asphalt

shingles with wide eaves and exposed, wood rafters under the eaves on the west elevation. The house features an interior, parged brick chimney on the south elevation and an exterior, brick chimney on the east elevation. The chimneys are parged above the roofline. There is a one-story, shed-roofed addition appended to the south elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in asbestos siding. The roof is clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **724 35th Street**
PROPERTY NAME: Apartment Building, 724 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1987
DHR NUMBER (S): 122-5087-1017
DESCRIPTION (S):
This is a two-story apartment building designed in Modern Movement style and constructed in 1987. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system. The south façade and first story of the east and west elevations are clad in brick veneer. The second story of the east and west elevations are clad in vinyl siding. The south façade features four entrances comprised of single-leaf, metal, 6-panel doors. There is a wood stair appended to the façade accessing the second story entrances. The building features 6/6, metal, double-hung sash windows with rowlock brick sills. Air conditioning units punctuate the façade wall. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **725 35th Street**
PROPERTY NAME: Store, 725 35th Street
OTHER NAME (S): Mt. Olive Word of Life United Holy Church of America
CONSTRUCTION DATE: circa 1950
DHR NUMBER (S): 122-5087-1018
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed circa 1950. It incorporates a concrete slab foundation and a wood frame and concrete block structural system clad in brick veneer. The north façade features two recessed entrances comprised of single-leaf, metal doors surmounted by transoms. The entrances are divided by a centrally located firewall. The building features 1/1, metal, double-hung sash windows surrounded by brick round arch details. There is a one-story, shed-roofed ell appended to the south end of the east elevation. The roof is gable clad in asphalt shingles. The façade gable is clad in vinyl siding. This building originally consisted of two, adjacent stores with flat roofs. The east building incorporated a wood frame structural system clad in brick veneer. The west building incorporated a concrete block structural system clad in brick veneer. The building was heavily remodeled circa 1980 including the addition of the gable roof. There is a freestanding, concrete block wall located to the east of the church.

NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **731 35th Street**
PROPERTY NAME: House, 731 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1019
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1917. It incorporates a parged brick foundation and a wood frame structural system clad in wood shingles. The north facade features a two-story, two-bay porch incorporated under the main roof. The first story porch features an asphalt-shingled, hipped roof with exposed, wood rafters under the eaves; battered, wood-shingled piers resting on parged brick pedestals; and a plain, wood balustrade. The second story porch is enclosed and clad in wood shingles punctuated by 1/1, metal, double-hung sash windows. The primary entrance is comprised of a single-leaf door surmounted by a multiple light transom and flanked by sidelights. The house features individual and paired, 1/1, metal, double-hung sash windows. There is a gable-roofed dormer on the façade that features paired, 1/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles. The house features an interior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **733 35th Street**
PROPERTY NAME: House, 733 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1020
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north facade features a one-story, enclosed porch with an asphalt-shingled, hipped roof; an asbestos-clad balustrade; and 1/1, metal, double-hung sash windows. The primary entrance is comprised of a single-leaf door with a wrought iron storm door. There is a single-leaf, metal, paneled door on the west elevation. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a gable-roofed dormer on the façade that features paired, 1/1, wood, double-hung sash windows with storm windows and exposed, wood rafters under the eaves. The roof is side gable clad in asphalt shingles. The house features an interior, brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **735 35th Street**
PROPERTY NAME: House, 735 35th Street
OTHER NAME (S): Multiple Dwelling, 735 35th Street

CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1021
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a two-story, two-bay porch incorporated under the main roof. The porch features an asphalt-shingled, hipped roof; wood, Tuscan columns resting on parged brick pedestals; and a plain, wood balustrade. The second story has been enclosed and features two, 1/1, wood, double-hung sash windows flanked with shutters on the façade. There are two entrances on the north façade. The west entrance is comprised of a single-leaf door with a wrought iron storm door flanked by multiple light sidelights. The east entrance is comprised of a single-leaf, metal, paneled door flanked by double-hung sash windows. There is a single-leaf, metal, 6-panel door on the west elevation. The house features individual and paired, 1/1, metal double-hung sash windows. There is a gable-roofed dormer on the façade that features paired, 1/1, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles. The house features an interior, parged brick chimney on the east elevation. There is a one-story ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **738 35th Street**
PROPERTY NAME: Store, 738 35th Street
OTHER NAME (S): Park Place Redevelopment Foundation
CONSTRUCTION DATE: 1950
DHR NUMBER (S): 122-5087-1022
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1950. It incorporates a concrete slab foundation and a concrete block structural system. The south façade is clad in brick veneer. The primary entrance is comprised of a single-leaf, plate glass door with a metal frame flanked on the east by a plate glass, storefront window. The remaining storefront windows have been filled with concrete block. The storefront is surmounted by an asphalt-shingled, pent roof and a cloth awning. The roof is flat with a parapet coped in metal. The building features an interior, brick chimney embedded in the west elevation wall.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **744 35th Street**
PROPERTY NAME: Store, 744 35th Street
OTHER NAME (S): China Inn
CONSTRUCTION DATE: 1945
DHR NUMBER (S): 122-5087-1023
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1945. It incorporates a concrete slab foundation and a concrete block structural system clad in brick veneer. The building features a rusticated stone base below the windows and flanking the main entrance on the south elevation and west facade.

The primary entrance is located on the west façade and is comprised of a single-leaf, plate glass door. The building features fixed, metal, 2-light windows. There is a single-leaf, metal door on the south elevation at the east corner. The roof is deck-on-hip with wide eaves.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **805 35th Street**
PROPERTY NAME: Shelter, 805 35th Street
OTHER NAME (S): Taylor Rental
CONSTRUCTION DATE: 1989
DHR NUMBER (S): 122-5087-1025
DESCRIPTION (S):
This is a one-story shelter designed in the Modern Movement style and constructed in 1989. It incorporates a concrete slab foundation and a metal frame structural system. The building occupies an L-shaped footprint on the property and abuts 3413 Colley Avenue (122-5087-1490) to the east. The south and west elevations are comprised of concrete block walls. The north elevation is open. The roof is flat and is clad in metal.
NON-CONTRIBUTING (1 - structure)

PROPERTY ADDRESS: **808 35th Street**
PROPERTY NAME: Store, 808 35th Street
OTHER NAME (S): Taylor's Do It Center
CONSTRUCTION DATE: 1957
DHR NUMBER (S): 122-5087-1026
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1957. The building occupies an L-shaped footprint on the property. It incorporates a concrete slab foundation and a concrete block structural system. There are oversized garage bays on the east and west ends of the south façade. The garage doors are roll-up and metal. The roof is flat with a parapet coped in metal. A concrete block storefront was added to the building situated west of the east end and south of the west end. It features a brick veneer façade. The storefront is recessed and comprised of a single-leaf, metal framed, plate glass door flanked by plate glass, metal framed, fixed windows. The roof is flat.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **811 35th Street**
PROPERTY NAME: Apartment Building, 811 35th Street
OTHER NAME (S): Chambrai Apartments
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1027
DESCRIPTION (S):
This is a two-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a brick foundation and a 7-course, American bond brick structural

system. The north façade features two, two-story, one-bay porches flanking a central located, projecting, two-story, brick entrance block. The porches and entrance are sheltered by a common, composite-tiled, hipped roof with exposed rafters. The porches feature two-story brick piers and closed, wood balustrades. The porches are accessed by single-leaf, wood, multiple light doors. The primary entrance is comprised of a single-leaf, metal door within a partially filled door opening and is surmounted by a composite-tiled, pent roof supported by wood brackets. There is a 1/1, metal, double-hung sash window with rowlock brick sill and a flat solider-course arch on the second story façade of the entrance block. The building features 1/1, metal, double-hung sash windows. The roof is flat with a parapet and a corbelled cornice on the facade. The parapet is stepped on the side elevations and is coped in a rowlock brick course.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **812 35th Street**
PROPERTY NAME: Apartment Building, 812 35th Street
OTHER NAME (S): Compiegne Apartments
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-1028
DESCRIPTION (S):
This is a two-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1919. It incorporates a brick foundation and a 7-course, American bond brick structural system. The south façade features two, two-story, one-bay porches flanking a centrally located, projecting, two-story, brick entrance block. The porches and entrance are sheltered by a common, asphalt-shingled, hipped roof with exposed, wood rafters. The porches feature two-story, brick piers and plain, wood or wrought iron balustrades. The porches are accessed by single-leaf, wood, multiple light doors. The primary entrance is comprised of a single-leaf door with eight lights flanked on the east by a boarded sidelight and surmounted by an asphalt-shingled, shed roof with brackets. There is a 1/1, wood, double-hung sash window with a rowlock brick sill and a soldier-course flat arch on the second story façade of the entrance block. The building features 1/1, wood, double-hung sash windows. The roof is flat with a parapet and a corbelled cornice on the facade. The parapet is stepped on the side elevations and is coped in a rowlock brick course. The building features an interior, brick chimney with a corbelled cap embedded in the west elevation wall.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **815 35th Street**
PROPERTY NAME: Apartment Building, 815 35th Street
OTHER NAME (S): Bapaume Apartments
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1029
DESCRIPTION (S):
This is a two-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a brick foundation and a 7-course, American bond brick structural system. The north façade features two, two-story, one-bay porches flanking a central located, projecting, two-

story, brick entrance block. The porches and entrance are sheltered by a common, flat roof. The porches feature two-story, brick piers and closed, vinyl-clad balustrades. The porches are accessed by single-leaf, metal, 6-panel doors. The primary entrance is comprised of a single-leaf, metal, 6-panel door flanked by wood paneled sidelights. There is a fixed, metal window with a rowlock brick sill on the second story façade of the entrance block. The building features 1/1, metal, double-hung sash windows. The roof is flat with a parapet coped in metal. The parapet is stepped on the side elevations.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **816 35th Street**
PROPERTY NAME: House, 816 35th Street
OTHER NAME (S): Duplex, 816 35th Street
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1030
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof, wood, Tuscan columns; and a plain, wood balustrade. There are two entrances on the façade comprised of a single-leaf, metal, paneled doors with storm doors. The west entrance is surmounted by a diamond-paned transom. The house features 6/6, metal, double-hung sash windows. The west end of the façade features an intersecting gable with cornice returns and a wood, casement window. The roof is hipped clad in asphalt shingles with a boxed cornice. The house features an interior, brick chimney with a corbelled cap on the east elevation. This house has been converted into a duplex.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **818 35th Street**
PROPERTY NAME: House, 818 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1031
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south facade features a one-story porch incorporated under the main roof with a metal awning; and clustered, wood piers resting on a closed, vinyl-clad balustrade. There is a shed-roofed dormer on the façade sheltering a second story porch with one bay and clustered, wood piers resting on a closed, vinyl-clad balustrade. The primary entrance is comprised of a single-leaf door with a storm door. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles with exposed, wood rafters under the eaves. The house features a central, interior, brick chimney with a corbelled cap.

- There is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in weatherboard. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **819 35th Street**
PROPERTY NAME: Apartment Building, 819 35th Street
OTHER NAME (S): Louvain Apartments
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1032
DESCRIPTION (S):
This is a two-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a brick foundation and a 7-course, American bond brick structural system. The north façade features two, two-story, one-bay porches flanking a centrally located, projecting, two-story, brick entrance. The porches and entrances are sheltered by a common, asphalt-shingled, hipped roof with exposed, wood rafters. The porches feature two-story brick piers and closed, vinyl-clad balustrades. The porches are accessed by single-leaf, metal, 6-panel doors. The primary entrance is comprised of a single-leaf, metal, 6-panel door flanked by wood paneled sidelights and surmounted by an asphalt-shingled, pent roof. There is a fixed, metal window with a rowlock brick sill on the second story façade of the entrance block. The building features 1/1, metal, double-hung sash windows with rowlock brick sills. The roof is flat with a parapet coped in metal. The parapet is stepped on the side elevations.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **822 35th Street**
PROPERTY NAME: House, 822 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-1033
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1919. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south facade features a one-story porch incorporated under the main roof with a metal awning; and clustered, wood piers resting on an asbestos-clad balustrade. There is a shed-roofed dormer on the facade sheltering a second story porch with one bay and clustered, wood piers resting on a closed, asbestos-clad balustrade. The primary entrance is comprised of a single-leaf, wood door with lights flanked by multiple light sidelights. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles with exposed, wood rafters under the eaves. The house features a central, interior, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **825 35th Street**
PROPERTY NAME: Apartment Building, 825 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1965
DHR NUMBER (S): 122-5087-1034
DESCRIPTION (S):
This is a two-story apartment building designed in Modern Movement style and constructed in 1965. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in brick veneer. The gables on the east and west elevations are clad in vinyl siding. There is a centrally located primary entrance on the north facade comprised of a single-leaf, metal, paneled door with a fan-shaped light. The entrance is accessed by brick stairs with a wrought iron balustrade. The building features metal, sliding windows with rowlock brick sills flanked by non-functional shutters. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **826 35th Street**
PROPERTY NAME: House, 826 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-1035
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1912. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door surmounted by a transom. The house features 1/1, metal, double-hung sash windows. The roof is gable clad in asphalt shingles with cornice returns on the facade. The house features an interior, brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **827 35th Street**
PROPERTY NAME: House, 827 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1036
DESCRIPTION (S):
This is a two-story house designed in the Bungalow style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch incorporated under a shed roof extending from the main roof. The porch features wood, Tuscan columns resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a

single-leaf, metal, paneled door with three lights and a storm door surmounted by a 3-light transom and flanked by 3-light sidelights. The house features 1/1, metal, double-hung sash windows. The east end of the façade features a gable-roofed dormer. The roof is side gable clad in asphalt shingles. The house features an interior, brick chimney with a corbelled cap on the east elevation and an exterior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **828 35th Street**
PROPERTY NAME: House, 828 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1037
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Dutch Colonial Revival style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The east and west elevations are clad in asbestos siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, shed roof; and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a storm door. The house features 2/2, wood, double-hung sash windows with storm windows. The roof is gambrel clad in asphalt shingles. The façade gambrel features a boarded, window opening.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **830 35th Street**
PROPERTY NAME: House, 830 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1038
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, shed roof; wrought iron posts and balustrade. There is a projecting gable over the west two bays of the porch. There is a single-leaf door surmounted by an asphalt-shingled pent roof on the west elevation. The house features 1/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the first story façade windows and a standing-seam metal clad, pent roof surmounts the second story façade windows. The roof is gable clad in asphalt shingles. The façade gable features a rectangular, metal, louvered vent. The house features a central interior, brick chimney.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1980. It incorporates a wood frame structural system clad in vinyl siding. The garage features a single-leaf, metal, paneled door and a metal, louvered vent. The roof is gable clad in asphalt shingles.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. The garage features an asphalt-shingled gable roof. It is located to the north of the non-contributing garage.

CONTRIBUTING (2 - buildings)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **831 35th Street**
PROPERTY NAME: House, 831 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-1039
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1915. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north facade features a one-story porch. The porch is incorporated under the main roof and features clustered, wood piers resting asbestos-clad pedestals; and a closed, asbestos-clad balustrade. There is a shed-roofed dormer on the façade with a porch featuring one bay; exposed, wood rafters under the eaves; and clustered, wood piers resting on an asbestos-clad balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a storm door. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles. The house features an interior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **836 35th Street**
PROPERTY NAME: House, 836 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1996
DHR NUMBER (S): 122-5087-1040
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1996. It is designed to resemble a Queen Anne-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The south façade features a one-story, five-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal door with a storm door. The house features individual and paired, 6/6, metal, double-hung sash windows. There is a two-story, projecting, squared bay surmounted by an intersecting gable on the west elevation. The façade gable is clad in composite shingles and features a rectangular, metal, louvered vent; and cornice returns. The roof is gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **839 35th Street**

PROPERTY NAME: House, 839 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1952
DHR NUMBER (S): 122-5087-1041
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1952. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, one-bay porch on the west end with an asphalt-shingled, gable roof; and wrought iron posts and balustrade. The primary entrance is comprised of a single-leaf, metal door with a storm door. The house features individual and paired, 2/2, wood, double-hung sash windows with wrought iron grates covering the lower sashes. The roof is gable clad in asphalt shingles. There is a louvered vent at the roof apex on the north façade. The house features an interior, brick chimney with a metal cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **841 35th Street**
PROPERTY NAME: House, 841 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-1042
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1915. It incorporates a brick foundation and a wood frame structural system. The first story is clad in weatherboard and the second story is clad in wood shingles. The north facade features a two-story, two-bay porch incorporated under the main roof. The first story porch features a false, asphalt-shingled, shed roof with exposed, wood rafters under the eaves; battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The second story porch is enclosed and features 2/2, wood, double-hung sash windows. The second story porch façade opening has been partially filled. The primary entrance is comprised of a single-leaf, wood, paneled door surmounted by a transom and flanked by boarded sidelights. The house features 1/1, 2/2, and 4/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in standing-seam metal with exposed, wood rafters under the eaves and brackets under the rakes. The house features an interior, brick chimney with a corbelled cap on the east elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in vertical board.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **842 35th Street**
PROPERTY NAME: House, 842 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1043

DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch incorporated under the main roof. The porch features wood, Tuscan columns; and turned balusters. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a transom. The house features individual and paired, 9/1, wood, double-hung sash windows with storm windows. There is a 6-light, wood casement window on the first story façade at the east corner. There is a gable-roofed dormer on the façade that features paired, 9/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles. The house features an interior, parged brick chimney with a cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **844 35th Street**
PROPERTY NAME: House, 844 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1950
DHR NUMBER (S): 122-5087-1044
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1950. It incorporates a concrete block foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, one-bay porch with an asphalt-shingled, gable roof; wrought iron posts; and a metal awning at the east corner. The façade wall at the southeast corner of the house is recessed from the façade and features a rusticated stone veneer base. The primary entrance is located on east elevation within the recessed area. The primary entrance is comprised of a single-leaf door with a storm door. The house features individual and paired, 1/1, wood, double-hung sash windows. Metal awnings surmount the façade windows. The roof is gable clad in asphalt shingles. There is a 1/1, wood, double-hung sash window surmounted by a metal awning at the roof apex of the south façade. The house features a central, interior, brick chimney with a metal cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **846 35th Street**
PROPERTY NAME: House, 846 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-1045
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1905. It incorporates a brick foundation and a wood frame structural system clad in asphalt shingles. The south façade features a two-story porch with a gable roof clad in composite tiles. The first story porch features brick piers; a plain, wood balustrade; and cloth awnings. The second story porch has been screened and features clustered, wood, paneled posts; and a vinyl-clad balustrade. The primary entrance is comprised of a single-leaf door with a storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is

a one-story, projecting, squared bay on the west elevation. The roof is hipped clad in composite tiles with wide eaves and exposed rafters. There is a window opening at the roof apex of the south façade. The house features an incorporated porch on the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **852 35th Street**
PROPERTY NAME: Apartment Building, 852 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1953
DHR NUMBER (S): 122-5087-1046
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1953. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, one-bay entry porch with a flat, metal roof; square, wood posts; and a plain, wood balustrade. The primary entrance is comprised of a centrally located, single-leaf, metal, paneled door with four lights. The building features individual and paired, 1/1, metal, double-hung sash windows. Non-functional shutters flank the façade windows. The roof is flat with a metal, boxed cornice and wide eaves.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **856 35th Street**
PROPERTY NAME: House, 856 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-1047
DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1919. It incorporates a brick foundation and a wood frame structural system clad in composite and asbestos siding. The south façade features a one-story, two-bay porch incorporated under a shed roof extending from the main roof. The porch features wrought iron posts resting on parged brick pedestals; exposed, wood rafters under the eaves; and a wood, lattice balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door surmounted by a 5-light transom and flanked by paneled sidelights with a light. The house features individual and tripartite, 1/1, wood, double-hung sash windows. There is a gable-roofed dormer on the façade at the west corner that features 1/1, wood, double-hung sash windows; exposed, wood rafters under the eaves; and brackets under the rakes. The roof is side gable clad in asphalt shingles with brackets under the rakes. There is a shed-roofed dormer on the north elevation. The house features an interior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **860 35th Street**
PROPERTY NAME: House, 860 35th Street
OTHER NAME (S):

CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-1048
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system. The south façade is clad in vinyl siding and the east and west elevations are clad in asbestos siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; and plain, wood posts and balustrade. There is a wood ramp appended to the south façade. The primary entrance is comprised of a single-leaf door. The house features 6/6, wood, double-hung sash windows with storm windows. Non-functional shutters flank the second story façade windows. There is an intersecting gable with cornice returns centrally located on the façade. The roof is side gable clad in asphalt shingles with cornice returns on the east and west elevations. The house features a central, interior, brick chimney with a corbelled cap. There is a one-story, shed-roofed ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **864 35th Street**
PROPERTY NAME: House, 864 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1049
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system. The first story of the south façade and the west elevation are clad vinyl siding and the second story façade and east elevation are clad in aluminum siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; and wrought-iron posts and balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door surmounted by a transom and flanked by non-functional, wood, louvered shutters. The house features 6/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the first story façade windows. There is an intersecting gable with cornice returns centrally located on the façade. The roof is side gable clad in asphalt shingles with cornice returns on the east and west elevations. The house features a central, interior, brick chimney with a corbelled cap. There is a one-story, shed-roofed, vinyl-clad ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **865 35th Street**
PROPERTY NAME: House, 865 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1050
DESCRIPTION (S):

This is a two-story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in weatherboard. The north façade features a one-story, one-bay porch with an asphalt-shingled, gable roof with exposed, wood rafters under the eaves and brackets under the rakes; battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light. The house features 1/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the first story façade windows. The roof is gable clad in asphalt shingles with exposed, wood rafters under the eaves and brackets under the rakes. There is a two-story, shed-roofed porch appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **866 35th Street**
PROPERTY NAME: House, 866 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-1051
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1919. It incorporates a parged brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; and plain, wood posts and balustrade. There is a pediment surmounting the centrally located porch entrance. The primary entrance is centrally located and is comprised of a single-leaf door with a storm door surmounted by a transom. The house features 6/1, wood, double-hung sash windows with storm windows; and 1/1, metal, double-hung sash windows. There is a hip-roofed dormer on the façade that features paired, 4/4, wood, double-hung sash windows and exposed, wood rafters under the eaves. The roof is side gable clad in asphalt shingles with exposed, wood rafters under the eaves. There is a one-story ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **869 35th Street**
PROPERTY NAME: Apartment Building, 869 35th Street
OTHER NAME (S): Chaumont Apartments
CONSTRUCTION DATE: circa 1915
DHR NUMBER (S): 122-5087-1052
DESCRIPTION (S):
This is a three-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1915. It incorporates a brick foundation and a brick structural system. The south façade features two, three-story, one-bay porches flanking a projecting, centrally located, three-story, brick entrance block. The porches and the entrances are sheltered by a common, asphalt-shingled, hipped roof with exposed, wood rafters under the eaves. The porches feature three-story, brick piers with rusticated stone capitals at each story and plain, wood balustrades. The porches are accessed by single-leaf, wood, 15-light doors surmounted by a soldier brick course. The primary entrance, the first story façade windows and the first story

porch entrances have been boarded. The entrance block features 6/1, wood, double-hung sash windows with storm windows surmounted by brick soldier-courses and stack bond brick panels. The building features individual and paired, 1/1, metal, double-hung sash windows with rowlock brick sills. The roof is flat with a parapet, a corbelled cornice, and rowlock brick course coping.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **870 35th Street**
PROPERTY NAME: House, 870 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-1053
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1912. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; wood, chamfered posts; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf, wood door with a light and a storm door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles. There is a one-story ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1000 35th Street**
PROPERTY NAME: House, 1000 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1996
DHR NUMBER (S): 122-5087-1054
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Modern Movement style and constructed in 1996. It is designed to resemble a Queen Anne-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The south façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; wood, turned posts; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal door with a wrought iron storm door flanked by sidelights. There is a two-story, projecting, squared bay surmounted by a gable on the east elevation. The façade gable is clad in fishscale-cut, vinyl siding and features a 2/1, metal, double-hung sash window. The house features 2/1, metal, double-hung sash windows. The roof is gable clad in asphalt shingles.

- This is a one-story garage designed in the Modern Movement style and constructed in 1996. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, paneled, roll-up door. The roof is gable clad in asphalt shingles.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **1003 35th Street**
PROPERTY NAME: House, 1003 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1055
DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, one-bay porch incorporated under the main roof. The porch features clustered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door. The house features 1/1, wood, double-hung sash windows with storm windows. There is a gable-roofed dormer on the façade that features 1/1, wood, double-hung sash windows with storm windows; brackets under the rakes; and a plain, wood balustrade. There is a one-story, projecting, squared bay surmounted by a shed roof on the west elevation. The roof is side gable clad in asphalt shingles with exposed, wood rafters under the eaves and brackets under the rakes. The house features a central, interior, chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1005 35th Street**
PROPERTY NAME: House, 1005 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1056
DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, one-bay porch with an asphalt-shingled, gable roof with brackets under the rakes; battered, vinyl-clad piers resting on brick pedestals; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf, wood door with lights and a storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a gable-roofed dormer on the façade that features 1/1, wood, double-hung sash windows with storm windows surmounted by awnings; and brackets under the rakes. There is a one-story, projecting, squared bay surmounted by a shed roof on the west elevation. The roof is side gable clad in asphalt shingles with brackets under the rakes. The house features a central, interior, parged brick chimney with a metal chimney pot.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1007 35th Street**
PROPERTY NAME: House, 1007 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1057

DESCRIPTION (S):
This is a two-story Bungalow constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, one-bay porch with an asphalt-shingled, shed roof; clustered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a storm door. The house features individual and paired, 1/1, metal, double-hung sash windows. The façade gable is clad in vinyl siding with a wood shingle appearance. There is a one-story, projecting, squared bay surmounted by a shed roof on the west elevation. The roof is cross gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1008 35th Street**
PROPERTY NAME: House, 1008 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-1058
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1921. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; battered, wood piers resting on brick pedestals; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf, wood door with lights and a wrought iron storm door surmounted by an aluminum-clad transom. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a wood ramp appended to the east elevation. The roof is hipped clad in asphalt shingles. There is an incorporated porch on the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1009 35th Street**
PROPERTY NAME: House, 1009 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1059
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, one-bay porch with an asphalt-shingled, hipped roof; a metal awning; battered, wood piers resting on brick pedestals; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows. There is a hip-roofed dormer on the façade that features paired, 6/1, wood, double-hung sash windows. The roof is hipped clad in slate shingles with a wide frieze. There is an incorporated porch on the south elevation. There is an interior chimney on the west elevation.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1010 35th Street**
PROPERTY NAME: House, 1010 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1060
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; square, wood columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door. The house features individual and tripartite, 6/6 and 4/4, wood, double-hung sash windows with storm windows. Non-functional shutters flank the facade windows. The roof is hipped clad in asphalt shingles with a boxed cornice. There is a central, interior chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1011 35th Street**
PROPERTY NAME: House, 1011 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1061
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in brick veneer. The north façade features a two-story porch incorporated under the main roof. The first story porch features square, wood columns; and a plain, wood balustrade. The second story porch has been enclosed with brick veneer punctuated by 1/1, metal, double-hung sash windows. The primary entrance is comprised of a single-leaf, wood, paneled door with eight lights and a storm door. The house features individual and paired, 3/1, wood double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles. The house features an exterior, brick chimney on the west elevation. There is a one-story, shed-roofed porch appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1013 35th Street**
PROPERTY NAME: House, 1013 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1923
DHR NUMBER (S): 122-5087-1062
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1923. It incorporates a brick

foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a multiple-light transom and flanked by 5-light sidelights. The house features 1/1, metal, double-hung sash windows. There is a shed-roofed dormer on the façade that shelters a two-bay porch. The porch features paired, wood posts and an aluminum-clad balustrade. The second story porch is accessed by a single-leaf, wood door with multiple lights and a storm door. There is a shed-roofed dormer on the south elevation. The roof is side gable clad in asphalt shingles. There is a one-story, shed-roofed ell appended to the south elevation.

- This is a one-story shed designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1925. It incorporates a wood frame structural system clad in aluminum siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **1014 35th Street**
PROPERTY NAME: House, 1014 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-1063
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1915. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door surmounted by a transom and flanked by sidelights. The house features 9/1, metal, double-hung sash windows. Non-functional shutters flank the facade windows. There is a hip-roofed dormer on the façade that feature a 1/1, metal, double-hung sash window. The roof is hipped clad in asphalt shingles. The house features an interior, parged brick chimney with a corbelled cap and a metal chimney pot on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1016 35th Street**
PROPERTY NAME: House, 1016 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-1064
DESCRIPTION (S):
This is a two-story Bungalow constructed in 1922. It incorporates a brick foundation and a wood frame structural system clad in weatherboard. The south façade features a one-story, one-bay porch incorporated under the main roof. The porch features square, wood posts; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a storm door. The house features 6/1 and 8/1, wood, double-hung sash windows with storm windows. There is an oversized, gable-roofed dormer on the

façade that features a grouping of four 1/1, wood, double-hung sash windows flanked by non-functional shutters; a 6-light, wood, casement window; exposed, wood rafters under the eaves; and brackets under the rakes. The roof is side gable clad in asphalt shingles with brackets under the rakes. The house features an exterior, brick chimney with a corbelled cap the west elevation. There is an incorporated porch on the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1020 35th Street**
PROPERTY NAME: House, 1020 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-1066
DESCRIPTION (S):
This is a two-story house designed the Colonial Revival style and constructed in 1914. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; wood, turned posts; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door. The house features individual and paired, 1/1, metal, double-hung sash windows. The roof is gable clad in asphalt shingles with a boxed cornice and cornice returns. The façade gable features a 1/1, wood, double-hung sash window. The house features interior, brick chimneys with a corbelled caps on the east and west elevations. There is a two-story, vinyl-clad and shed-roofed ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1021 35th Street**
PROPERTY NAME: House, 1021 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1067
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system. The north façade is clad in brick veneer and the east and west elevations are clad in vinyl siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a wrought-iron storm door flanked on the east by a sidelight with a wrought iron cover. The house features 6/6, metal, double-hung sash windows. Non-functional shutters flank the first story facade windows. There is a one-story, projecting bay on the west elevation. The roof is hipped clad in asphalt shingles.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1995. It incorporates a wood frame structural system clad in vinyl siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1023 35th Street**
PROPERTY NAME: House, 1023 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1068
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood door with lights and a wrought iron storm door flanked by boarded sidelights. The house features individual and tripartite, 6/1 and 4/1, wood, double-hung sash windows with storm windows. There is an oversized, hip-roofed dormer on the façade that shelters a three-bay porch. This porch features plain, wood posts and an aluminum-clad balustrade. The second story porch is accessed by a single-leaf door with a storm door. There is a one-story, projecting, squared bay on the east elevation. There is a dormer on the south elevation. The roof is side gable clad in slate shingles with brackets under the rakes. The house features a central, interior, brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1024 35th Street**
PROPERTY NAME: House, 1024 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-1069
DESCRIPTION (S):
This is a two-story house designed the Colonial Revival style and constructed in 1912. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; and wrought iron posts and balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door. The house features 1/1, metal, double-hung sash windows. The roof is gable clad in asphalt shingles with a boxed cornice and cornice returns. The façade gable features a 1/1, metal, double-hung sash window. The house features an interior, brick chimney with a corbelled cap on the west elevation and an interior, parged brick chimney with a corbelled cap on the north elevation. There is a one-story ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1028 35th Street**
PROPERTY NAME: Apartment Building, 1028 35th Street
OTHER NAME (S): Normandy Apartments

CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1070
DESCRIPTION (S):
This is a three-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1918. It incorporates a brick foundation and a brick structural system clad in brick veneer. The south façade features two, three-story, one-bay porches flanking a projecting, centrally located, three-story, brick entrance block. The porches and the entrance are sheltered by a common, asphalt-shingled, hipped roof. The porches feature three-story brick piers with stone capitals on each story and plain, wood balustrades. The porches are accessed by single-leaf, wood, paneled doors. The primary entrance is comprised of a single-leaf, metal, paneled door flanked by boarded sidelights. The entrance block features 8/1, wood, double-hung sash windows with storm windows and rowlock brick sills. The building features 1/1, wood, double-hung sash windows with storm windows and rowlock brick sills. The roof is flat with a corbelled cornice and rowlock brick course coping.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1029 35th Street**
PROPERTY NAME: House, 1029 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1071
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1920. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; square, wood columns; a wide frieze; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a rounded arch light. The house features 1/1, metal, double-hung sash windows. There is a one-story, squared, projecting oriel surmounted by a hipped roof on the west elevation. The roof is hipped clad in asphalt shingles with a wide frieze. There is a one-story porch appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1031 35th Street**
PROPERTY NAME: House, 1031 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-1072
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1915. It incorporates a brick foundation and a wood frame structural system clad weatherboard. The north façade features a one-story, two-bay porch incorporated under the main roof featuring battered, wood piers; and a plain, wood balustrade. A second story porch is sheltered under an oversized, shed-roofed dormer. The second story porch features

battered, wood piers and a weatherboard-clad balustrade. The second story porch is accessed by a double-leaf, wood door with multiple lights. The primary entrance is comprised of a single-leaf, wood, paneled door with two lights. The house features individual and paired, 1/1, metal, double-hung sash windows. The roof is side gable with exposed, wood rafters under the eaves and brackets under the rakes. There is a shed-roofed dormer on the south elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1950. It incorporates a concrete block structural system clad in stucco. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **1034 35th Street**
PROPERTY NAME: House, 1034 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1073
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1916. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; square, wood posts; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with four lights and a storm door surmounted by a boarded transom. The house features 1/1, metal, double-hung sash windows. Non-functional shutters flank the façade windows. There is a hip-roof dormer on the façade that features paired, 1/1, metal, double-hung sash windows. The roof is hipped clad in asphalt shingles with wide eaves. The house features an interior, brick chimney with a corbelled cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1035 35th Street**
PROPERTY NAME: House, 1035 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-1074
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1914. It incorporates a brick foundation and wood frame structural system clad in wood shingles. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; and wrought iron posts and balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a storm door surmounted by a boarded transom and flanked by boarded sidelights. The house features 1/1, metal, double-hung sash windows. There is a hip-roof dormer on the facade that feature paired, 1/1, metal, double-hung sash windows. The dormer is clad in asphalt shingles. The roof is hipped clad in asphalt shingles with a wide frieze. The house features an interior, brick chimney with a corbelled cap on the east elevation and a central, interior brick chimney with a

corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1036 35th Street**
PROPERTY NAME: House, 1036 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1075
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad wood shingles. The south façade features a one-story, two-bay porch incorporated under a shed roof extending from the main roof. The porch features battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door surmounted by a 3-light transom and flanked by boarded sidelights. The house features individual and tripartite, 1/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the first story façade windows. There is an oversized, shed-roofed dormer on the façade. The dormer is clad in vinyl punctuated by 3-light, metal, triple-hung sash windows. The roof is side gable with brackets under the rakes. There is a shed-roofed dormer on the south elevation. The house features an interior, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1042 35th Street**
PROPERTY NAME: House, 1042 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1078
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, one-bay porch incorporated under the main roof. The porch features battered, wood piers resting on brick pedestals; a wood paneled balustrade; and a metal awning. The primary entrance is comprised of a single-leaf door with a wrought iron storm door. The house features 4/1 and 6/1, wood, double-hung sash windows with storm windows. There is an oversized, gable-roofed dormer on the façade that features a tripartite, double-hung sash window and an octagonal-shaped, louvered vent. The roof is side gable clad in asphalt shingles. The house features an exterior, brick chimney on the west elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1960. It incorporates a wood frame structural system clad in aluminum siding.
- This is a one-story carport designed in the Modern Movement style and constructed circa 1960. It incorporates a wood frame structural system clad in aluminum siding.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - structure)

PROPERTY ADDRESS: **1046 35th Street**
PROPERTY NAME: House, 1046 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1079
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1920. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; square, wood posts; and a wood, lattice balustrade. The primary entrance is comprised of a single-leaf door with wrought iron storm door surmounted by a transom and flanked by sidelights. The house features 1/1, metal, double-hung sash windows. Non-functional shutters flank the façade windows. There is a hip-roof dormer that features paired, 1/1, wood, double-hung sash windows on the façade. The roof is hipped clad in asphalt shingles with a wide frieze. The house features an interior, brick chimney on the west elevation. There is a one-story ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1050 35th Street**
PROPERTY NAME: House, 1050 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1930
DHR NUMBER (S): 122-5087-1080
DESCRIPTION (S):
This is a two-story house designed in the Dutch Colonial Revival style and constructed in 1930. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features an enclosed, projecting, squared porch on the east corner with an asphalt-shingled hipped roof. The porch is clad in vinyl siding and features a single-leaf, storm door surmounted by a two-light transom. The primary entrance is comprised of a single-leaf door with a storm door. The house features 9/1, wood, double-hung sash windows with storm windows. The first story façade features a tripartite window of a fixed, wood, one-light window flanked by 2/2, wood, double-hung sash windows. There is a one-light, wood, casement window at the roof apex on the façade. The roof is cross-gambrel clad in asphalt shingles with cornice returns. The house features a central, interior, brick chimney. There is a one-story ell appended to the north elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1950. It incorporates a concrete block structural system. The south façade features a one-story, one-bay carport with a flat, metal roof and metal posts. The garage features a centrally located, single-leaf door with a storm door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **1087 35th Street**
PROPERTY NAME: Manufacturing Facility, 1087 35th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1954
DHR NUMBER (S): 122-5087-1084
DESCRIPTION (S):
This is a one-story manufacturing facility designed in the Modern Movement style and constructed in 1954. It incorporates a brick foundation and a 5-course, American bond brick structural system. The north façade is clad in brick veneer with a parged base. The north façade features double-leaf, metal doors with lights surmounted by a projecting, metal overhang. The building features metal, industrial sash windows. The west elevation features a loading dock comprised of two sets of double-leaf, metal doors surmounted by a projecting, metal overhang supported by metal posts. There is a metal, roll-up door on the south end of the west elevation. The roof is flat with a parapet coped in parapet.
CONTRIBUTING (1 - building)

36th Street

PROPERTY ADDRESS: **109 36th Street**
PROPERTY NAME: House, 109 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-1085
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1907. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; wrought iron posts; and a pediment surmounting the centrally located entrance. The primary entrance is comprised of a single-leaf door with a wrought iron storm door surmounted by a transom. The house features 1/1, metal, double-hung sash windows. There is an oversized, metal, fixed window on the first story facade. There are two entrances on the east elevation. The south entrance is comprised of a single-leaf door with a wrought iron storm door surmounted by a metal awning and accessed by brick stairs. The central entrance is comprised of a single-leaf, door with a wrought iron storm door surmounted by a transom. There is a gable-roofed dormer on the façade that features a Queen Anne, wood, double-hung sash window surmounted by a closed gable. There is a two-story, projecting canted bay surmounted by a closed gable on the west elevation. There is an intersecting, closed gable on the west elevation that features a Queen Anne, wood, double-hung sash window. The roof is hipped clad in asphalt shingles. The house features a central, interior, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **115 36th Street**
PROPERTY NAME: House, 115 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-1086
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1907. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; plain, wood posts and balustrade; and a pediment surmounting the centrally located entrance. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows and some of the windows on the side elevations. There is an entrance on the west elevation that is comprised of a single-leaf door surmounted by a transom. There is an intersecting, closed gable on the west end of the façade that features a tripartite, wood window. There is a two-story, projecting canted bay surmounted by a closed gable on the west elevation. The closed gable features a Queen Anne, wood, double-hung sash window. There is an intersecting, closed gable on the east elevation that features a Queen Anne, wood, double-hung sash window. The roof is cross-gable-over hip. The façade gable over hip features a one-light, wood casement window. The house features a central, interior, parged brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **116 36th Street**
PROPERTY NAME: Apartment Building, 116 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1969
DHR NUMBER (S): 122-5087-1087
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1969. It incorporates a brick foundation and a wood frame structural system clad in brick veneer. The south façade features a centrally located entrance comprised of a single-leaf, metal door with nine lights surmounted by a Classical broken pediment. The building features metal, sliding windows with rowlock brick sills. Non-functional shutters flank the façade windows. Air conditioning units punctuate the façade wall. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **205 36th Street**
PROPERTY NAME: House, 205 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1908

DHR NUMBER (S): 122-5087-1088
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1908. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; plain, wood posts; and turned balusters. The primary entrance is comprised of a single-leaf, metal, paneled door. The house features 6/6, metal, double-hung sash windows. There is a two-story, projecting, canted bay on the east end of the façade that is surmounted by a closed gable. The closed gable features vergeboards. There is an intersecting, closed gable on the west elevation. The roof is hipped-cross-gable clad in asphalt shingles. The house features an interior, brick chimney with a corbelled cap on the east elevation. There is a one-story ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **206 36th Street**
PROPERTY NAME: House, 206 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-1089
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1915. It incorporates a brick foundation. The first story features a brick structural system clad in brick veneer and the second story features a wood frame structural system clad in wood shingles. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door, wood door with a light and a storm door surmounted by a jack arch transom. The house features Queen Anne, wood, double-hung sash windows. There is a one-story, projecting, squared bay on the east end of the second story façade that is surmounted by a closed gable. There is a hip-roofed dormer on the east elevation. There are metal stairs appended to the east elevation. There is an intersecting, closed gable on the west elevation. The roof is hipped-cross-gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **207 36th Street**
PROPERTY NAME: House, 207 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1908
DHR NUMBER (S): 122-5087-1090
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1908. It incorporates a brick foundation and wood frame structural system clad in weatherboard. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; wood, turned posts; and turned

balusters. The primary entrance is comprised of a single-leaf, metal door with a storm door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, squared bay on the east end of the façade that is surmounted by a closed gable. The closed gable features a boarded window opening and a vergeboard. There is an intersecting, closed gable on the west elevation. The roof is hipped-cross-gable clad in asphalt shingles with a wide frieze.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **211 36th Street**
PROPERTY NAME: House, 211 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1908
DHR NUMBER (S): 122-5087-1091
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1908. It incorporates a brick foundation and wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; square, wood columns; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door surmounted by a transom. The house features 1/1 and Queen Anne, wood, double-hung sash windows. There is a one-story, projecting, canted bay on the west end of the second story façade. The façade gable is clad in fishscale-cut, wood siding and features a Palladian window of a 1/1, wood double-hung sash window with a rounded arch upper sash flanked by fixed, wood windows. There is a one-story, projecting, canted bay on the second story of the west elevation that is surmounted by a closed gable. There is a two-story, projecting, canted bay surmounted by a closed gable on the east elevation. There is a gable-roofed dormer on the east elevation that features paired, Queen Anne, wood windows surmounted by a closed gable. There are wood stairs appended to the east elevation that are surmounted by a projecting, shed-roofed overhang. The roof is hipped-cross-gable clad in asphalt shingles with a wide frieze. The house features a central, interior, brick chimney with a corbelled cap and an interior, brick chimney with a corbelled cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **212 36th Street**
PROPERTY NAME: House, 212 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1908
DHR NUMBER (S): 122-5087-1092
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1908. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay, screened porch with an asphalt-shingled, hipped roof; square, wood columns; and a plain, wood balustrade. The porch features a centrally located, single-leaf, screen door. The house features 1/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, squared

bay on the east end of the façade that is surmounted by a closed gable. The closed gable features a Palladian window of a 1/1, wood, double-hung sash window flanked by fixed, wood windows. There is a one-story, projecting, canted bay on the first story of the east façade. There is a gable-roofed dormer on the east elevation that shelters a one-bay porch with plain, wood posts and balustrade. The roof is gable over hip clad in asphalt shingles. The house features an interior, brick chimney with a corbelled cap on the east elevation. There is a one-story, shed-roofed addition appended to the northeast corner of the house. There is a two-story, shed-roofed addition appended to the north elevation.

- This is a one-story carport designed in the Modern Movement style and constructed circa 1970. It incorporates a metal frame structural system and a metal-clad, gable roof.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - structure)

PROPERTY ADDRESS: **213 36th Street**
PROPERTY NAME: House, 213 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-1093
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1906. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a dentiled cornice; wood, Tuscan columns; and turned balusters. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a transom. There is a two-story, gable-roofed block projecting from the west end of the façade that is surmounted by a closed gable. The closed gable is clad in fishscale-cut, wood shingles and features a 1/1, vinyl, double-hung sash window. The house features 1/1, vinyl, double-hung sash windows. There is a two-story, projecting, canted bay on the west elevation that is surmounted by a closed gable. There is a wood deck appended to the west elevation. There is an intersecting gable on the east elevation. The roof is hipped-cross-gable clad in asphalt shingles with a boxed cornice. The house features an interior, brick chimney with a corbelled cap on the west elevation. There is a one-story ell appended to the south elevation.

- This is a one-and-one-half-story garage designed in the Modern Movement style and constructed circa 1970. It incorporates a concrete block structural system. The façade gable is clad in vinyl siding. The garage features a roll-up, metal, paneled door and 1/1, vinyl, double-hung sash windows. The roof is gable clad in asphalt shingles. The garage features an exterior, brick chimney on the south elevation.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **216 36th Street**
PROPERTY NAME: House, 216 36th Street
OTHER NAME (S):

CONSTRUCTION DATE: 1908
DHR NUMBER (S): 122-5087-1094
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1908. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; modillion cornice; fluted, wood, Tuscan columns; and a wood balustrade with a sunburst motif. The primary entrance is comprised of a single-leaf, metal door with an oval light surmounted by a transom. The house features 1/1, metal, double-hung sash windows. There is a two-story, projecting, canted bay on the east end of the façade that is surmounted by a closed gable. The closed gable features a Palladian window of a Queen Anne, wood, double-hung sash window with a rounded arch upper sash and articulated keystone flanked by 1/1, wood, double-hung sash windows. The closed gable is clad in fishscale-cut, wood shingles and features a vergeboard. There is a two-story, projecting, canted bay on the east elevation that is surmounted by a closed gable. There is a hip-roofed dormer on the west elevation that features paired windows. The roof is hipped-cross-gable clad in asphalt shingles with modillions under the eaves. The house features an interior, brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **219 36th Street**
PROPERTY NAME: House, 219 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-1095
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and wood frame structural system. The first story is clad in brick veneer and the second story is clad in aluminum siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; and wrought iron posts and balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door surmounted by transom and flanked by sidelights. The house features 1/1, wood, double-hung sash windows with storm windows. There is an oval-shaped window on the first story of the west elevation. The first story windows feature rowlock brick sills and are surmounted by brick flat and jack arches. There is a two-story tower on the northeast corner of the house that is surmounted by an octagonal roof. There is a one-story, projecting, squared bay on the west end of the second story façade that is surmounted by a closed gable. The closed gable features paired, 1/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, canted bay on the east elevation that is surmounted by a closed gable. The roof is hipped-cross-gable clad in asphalt shingles. There is a two-story, vinyl-clad addition appended to the south elevation.

- This is a one-story, two-car garage designed in the Modern Movement style and constructed circa 1960. It incorporates a concrete block structural system clad in corrugated metal. The garage features two garage doors. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)

NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **220 36th Street**
PROPERTY NAME: House, 220 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-1096
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1907. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; wood, turned posts; and turned balusters. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a transom. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a gable-roofed dormer on the east elevation. The façade gable is closed and features paired, 1/1, wood, double-hung sash windows. The roof is gable clad in asphalt shingles. The house features an interior, brick chimney with a corbelled cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **224 36th Street**
PROPERTY NAME: House, 224 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-1097
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1907. It incorporates a parged brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and turned balusters. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light surmounted by a transom. The house features individual and paired, 2/2, wood, double-hung sash windows with storm windows. There is a two-story projecting block on the east elevation that features a single-leaf, metal, paneled door with a storm door surmounted by a transom. There is a gable-roofed dormer on the west elevation. The façade gable is closed and features paired, 2/2, wood, double-hung sash windows. The roof is gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **225 36th Street**
PROPERTY NAME: House, 225 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-1098

DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1912. It incorporates a brick foundation and wood frame structural system. The first story is clad in brick veneer and features quoins and a header brick beltcourse between the first and second stories. The second story is clad in vinyl siding. The north façade features a one-story, one-bay porch at the west corner with an asphalt-shingled, gable roof with wide eaves; and battered, brick piers; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door surmounted by transom. The house features 1/1, wood, double-hung sash windows with storm windows. The first story windows feature rowlock brick sills. There is a Palladian window of a 1/1, wood, double-hung sash window with a rounded arch upper sash flanked by wood, casement windows above the porch. There is a two-story projecting, squared bay on the east elevation of the façade. There is a two-story, projecting bay on the east elevation that is surmounted by a closed gable. The first story of the bay is canted and the second story is squared. There is a one-story, projecting, squared oriel on the west elevation. There is an intersecting, closed gable on the west elevation. The roof is hipped-cross-gable clad in asphalt shingles with a boxed cornice. There is a two-story, vinyl-clad addition appended to the south elevation. The addition features an octagonal shaped, metal window. The house features an interior, parged brick chimney with a corbelled cap and a metal chimney pot on the east elevation and a central, interior, parged brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **228 36th Street**
PROPERTY NAME: House, 228 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-1099
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1906. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; fluted, metal columns; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf, wood door surmounted by a transom. The house features individual and paired, 6/6, metal, double-hung sash windows. There is a one-story, projecting, squared bay on second story of the west end of the façade that is surmounted by an intersecting gable. The intersecting gable features a diamond-shaped, wood window and cornice returns. There are intersecting gables with cornice returns on the east and west elevations. The roof is hipped-cross-gable clad in asphalt shingles with a boxed cornice. The house features an interior, brick chimney with a corbelled cap on the east elevation. There is a one-story ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **229 36th Street**
PROPERTY NAME: Duplex, 229 36th Street
OTHER NAME (S):

CONSTRUCTION DATE: 1991
DHR NUMBER (S): 122-5087-1100
DESCRIPTION (S):
This is a two-story duplex designed in the Modern Movement style and constructed in 1991. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in brick veneer. The north façade features a centrally located, two-story, projecting squared block with a shorter projecting block applied to the north elevation. The blocks feature brick quoins and gable roofs. The northernmost block features a one-story, two-bay porch with an asphalt-shingled, hipped roof; brick piers; and a brick balustrade. The porch features a brick wall that separates the two entrances on the façade. The entrances are comprised of single-leaf, metal, paneled doors with two lights. The house features1/1, metal, double-hung sash windows; and metal, sliding windows. The windows feature rowlock brick sills and the windows are surmounted by flat arches. Portions of the façade gable of the projecting block are clad in vinyl siding. The roof is cross-gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **232 36th Street**
PROPERTY NAME: Duplex, 232 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1984
DHR NUMBER (S): 122-5087-1101
DESCRIPTION (S):
This is a two-story duplex designed in the Modern Movement style and constructed in 1984. It incorporates a concrete block foundation and a wood frame structural system. The duplex is comprised of a two-story, central, gable-roofed block flanked by one-story, shed-roofed garage wings. The first story façade of the central block and the wings are clad in brick veneer. The second story of the central block and the side elevations are clad in aluminum siding. The south façade features two, one-story, one-bay porches incorporated under the main roof and separated by a centrally located brick wall. The porches feature plain, wood balustrades. There are two entrances on the façade that are comprised of single-leaf, metal doors with wrought iron storm doors. The duplex features paired, 6/6, metal, double-hung sash windows. The flanking garage wings feature metal, paneled roll-up doors. The roof is gable clad in asphalt shingles with wide eaves.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **233 36th Street**
PROPERTY NAME: House, 233 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: circa 2000
DHR NUMBER (S): 122-5087-1102
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed circa 2000. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The

north façade features a one-story, three-bay porch with an asphalt-shingled shed roof; turned, wood posts; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal door with a storm door. There is a two-story, projecting, squared block on the east end of the façade. The block features an intersecting gable roof; a metal, paneled roll-up garage door on the first story; and an octagonal-shaped, louvered vent at the roof apex. The house features individual and paired, 6/6, metal, double-hung sash windows flanked by non-functional shutters. There is an octagonal-shaped, metal window on the first story façade. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **236 36th Street**
PROPERTY NAME: Duplex, 236 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1984
DHR NUMBER (S): 122-5087-1103
DESCRIPTION (S):
This is a two-story duplex designed in the Modern Movement style and constructed in 1984. It incorporates a brick foundation and a wood frame structural system. The duplex is comprised of a two-story, central, gable-roofed block flanked by one-story, side gable-roofed garage wings. The first story façade of the central block and the façade of the wings are clad in brick veneer. The second story of the central block and the side elevations are clad in vinyl siding. The south façade features two, one-story, one-bay porches incorporated under the main roof and separated by a centrally located brick wall. The porches feature plain, wood balustrades. There are two entrances on the façade that are comprised of single-leaf doors with storm doors. The duplex features paired, 6/6, metal, double-hung sash windows. The flanking garage wings feature wood, paneled roll-up doors. There are single-leaf entrances on the east and west elevations of the garage wings. The roof is gable clad in asphalt shingles with wide eaves.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **237 36th Street**
PROPERTY NAME: House, 237 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1908
DHR NUMBER (S): 122-5087-1104
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1908. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay, screened porch with an asphalt-shingled, hipped roof; squared, wood columns with brackets; and a plain, wood balustrade. The porch is accessed by a single-leaf, screen door. The primary entrance is comprised of a single-leaf, wood door with a wrought iron storm door surmounted by a transom. There is a two-story, projecting, canted bay on the west end of the façade that is surmounted by a closed gable. The closed gable features a 1/1, wood, double-hung sash window. The house features 1/1, wood, double-hung

sash windows with storm windows. There is a two-story, projecting, canted bay surmounted by a closed gable on the west elevation. There is a single-leaf door with a storm door on the east elevation. The roof is hipped clad in asphalt shingles with a boxed cornice. There is a one-story ell appended to the south elevation. The house features an interior, brick chimney with a corbelled cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **241 36th Street**
PROPERTY NAME: House, 241 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1908
DHR NUMBER (S): 122-5087-1105
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1908. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood door with a storm door surmounted by a boarded transom and flanked by 5-light sidelights. There is a two-story, projecting, canted bay on the west end of the façade. The house features 1/1, wood, double-hung sash windows with storm windows. The façade gable is closed and features paired, 1/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, canted bay surmounted by a closed gable on the west elevation. There is a single-leaf door surmounted by a shed-roofed overhang and accessed by stairs with a wood balustrade the west elevation. There is a one-story, shallow oriel on the east elevation. There is an intersecting, closed gable on the east elevation. The roof is cross-gable clad in asphalt shingles with a boxed cornice. There is a one-story ell appended to the south elevation. The house features an interior, brick chimney with a corbelled cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **300 36th Street**
PROPERTY NAME: House, 300 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1989
DHR NUMBER (S): 122-5087-1106
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1989. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system. The first story façade is clad in brick veneer and the second story façade and side elevations are clad in vinyl siding. The south facade features a one-story, one-bay porch with an asphalt-shingled, gable roof; wood, turned posts; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a storm door flanked on the west by a 6-light sidelight. The house features 6/6, metal, double-hung sash windows flanked by non-functional shutters. The first story façade windows feature rowlock brick sills. There

is a one-story porte-cochere appended to the west elevation. The porte-cochere features a brick pier; an asphalt-shingled, gable roof; and a single-leaf, metal, paneled door accessing the house. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **303 36th Street**
PROPERTY NAME: House, 303 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1989
DHR NUMBER (S): 122-5087-1107
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1989. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a single-leaf, metal, paneled door with a storm door and a Classical door surround. The door surround is comprised of a wood pediment and pilasters. The door is accessed by brick stairs with a wrought iron balustrade. There is a one-story, projecting, canted bay on the west end of the first story. The house features 4/4 and 6/6, metal, double-hung sash windows. The second story façade windows are flanked by non-functional shutters. The façade gable features an octagonal-shaped, louvered vent. The roof is gable clad in asphalt shingles. There is a shed-roofed ell appended to the south elevation.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **304 36th Street**
PROPERTY NAME: House, 304 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1989
DHR NUMBER (S): 122-5087-1108
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1989. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system. The first story façade is clad in brick veneer and the second story façade and side elevations are clad in vinyl siding. The south facade features a one-story, one-bay porch with an asphalt-shingled, shed roof; a wood, turned post; a plain, wood post; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door flanked on the east by a 3-light sidelight. The house features 6/6, metal, double-hung sash windows flanked by non-functional shutters. The first story façade windows feature rowlock brick sills. There is a one-story porte-cochere appended to the west elevation. The porte-cochere features an asphalt-shingled, gable roof; brick pier; and a single-leaf door accessing the house. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **305 36th Street**
PROPERTY NAME: Duplex, 305 36th Street

OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-1109
DESCRIPTION (S):
This is a two-story duplex designed in the Late 19th and Early 20th Century American Movement style and constructed in 1921. It incorporates a brick foundation and a 6-course, American bond brick structural system. The north façade features a two-story, two-bay porch with an asphalt-shingled, hipped roof; a boxed cornice; brick piers; and a wrought iron balustrade on the second story, and a plain, wood balustrade on the first story. There are two entrances on the first story façade that are comprised of single-leaf, metal doors with storm doors surmounted by transoms. There is a single-leaf, wood door with lights and a storm door surmounted by a 2-course brick jack arch accessing the second story porch. The duplex features individual and paired, 6/6, metal, double-hung sash windows with rowlock brick sills. The first story façade features paired, 6/6, metal, double-hung sash windows surmounted by a wood fanlight. Two-course brick, rounded arches surmount the windows. The roof is flat with a parapet coped in a rowlock brick course. The duplex features an interior, brick chimney embedded in the east elevation wall.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **308 36th Street**
PROPERTY NAME: House, 308 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1989
DHR NUMBER (S): 122-5087-1110
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1989. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system. The first story façade is clad in brick veneer and the second story façade and side elevations are clad in vinyl siding. The south facade features a one-story, one-bay porch with an asphalt-shingled, gable roof; wood, turned posts; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door flanked on the west by a 3-light sidelight. The house features 6/6, metal, double-hung sash windows flanked by non-functional shutters. The first story façade windows feature rowlock brick sills. There is a one-story porte-cochere appended to the west elevation. The porte-cochere features an asphalt-shingled, side-gable roof; brick pier; and a single-leaf door accessing the house. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **309 36th Street**
PROPERTY NAME: House, 309 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1908
DHR NUMBER (S): 122-5087-1111
DESCRIPTION (S):

This is a two-story house designed in the Queen Anne style and constructed in 1908. It incorporates a parged brick foundation and wood frame structural system clad in weatherboard. The north façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; wood, turned posts; and turned balusters. The north façade features a centrally located, two-story, projecting, squared block surmounted by a gable. The gable is clad in wood shingles and features cornice returns. There are two entrances on the façade. The west entrance is comprised of a single-leaf, wood, door with an oval light and a storm door surmounted by a transom. The east entrance is comprised of a single-leaf, wood door with a light and a storm door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows. There is a two-story, projecting, squared bay surmounted by a gable on the east elevation. The roof is hipped-cross-gable clad in standing-seam metal with a wide frieze and a boxed cornice. The house features two, interior, parged brick chimneys with corbelled caps on the east elevation. There is a one-story, shed-roofed ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **313 36th Street**
PROPERTY NAME: House, 313 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1112
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1918. It incorporates a parged brick foundation and wood frame structural system clad in asbestos siding. The north façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; wood, turned posts; and a wrought iron balustrade. The north façade features a centrally located, two-story, projecting, squared block surmounted by a gable. The gable is clad in fishscale-cut, wood shingles and features cornice returns. There are two entrances on the façade. The west entrance is comprised of a single-leaf, metal, paneled door surmounted by a transom. The east entrance is comprised of a single-leaf door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, squared bay surmounted by a gable on the east elevation. The roof is hipped-cross-gable clad in asphalt shingles with a wide frieze and a boxed cornice. The house features two, interior, brick chimneys with corbelled caps on the east elevation. There is a one-story ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **317 36th Street**
PROPERTY NAME: House, 317 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1990
DHR NUMBER (S): 122-5087-1113
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1990. It incorporates a

concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The north facade features a one-story, one-bay porch with an asphalt-shingled, shed roof; and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door flanked on the east by a 3-light sidelight. The house features 6/6, metal, double-hung sash windows flanked by non-functional shutters. There is a one-story, projecting, canted bay on the east end of the first story façade. There is a one-story porte-cochere appended to the west elevation. The porte-cochere features an asphalt-shingled, side gable-roof; wood posts a resting on brick pedestals; and a single-leaf, metal door accessing a storage unit that is separated from the house by a breezeway. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **318 36th Street**
PROPERTY NAME: Apartment Building, 318 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 2000
DHR NUMBER (S): 122-5087-1114
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 2000. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in brick veneer. The south façade features two building entries. The west entrance is comprised of two, single-leaf, metal, 4-panel doors surmounted by an asphalt-shingled, shed roof. The east entrance is comprised of a single-leaf, metal, 4-panel door surmounted by an asphalt-shingled, shed roof supported by wood, turned posts. The building features metal, sliding windows with rowlock brick sills. Rectangular-shaped polychrome bricks flank the windows and resemble shutters. Air conditioning units punctuate the south façade wall. The roof is side gable clad in asphalt shingles with a wide frieze on the south façade.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **320 36th Street**
PROPERTY NAME: House, 320 36th Street
OTHER NAME (S): Duplex, 320 36th Street
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1115
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; and wrought iron posts. The primary entrance is comprised of a single-leaf, metal door surmounted by a transom. There is a one-story, projecting, canted bay on the east end of the second story façade that is surmounted by a closed gable. The house features 1/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the first story façade windows. There is an intersecting, closed gable on the east elevation. The roof is hipped-cross-gable clad in asphalt shingles with a boxed cornice. There is a one-story, shed-roofed ell appended to the north elevation.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **321 36th Street**
PROPERTY NAME: House, 321 36th Street
OTHER NAME (S): Duplex, 321 36th Street
CONSTRUCTION DATE: 1901
DHR NUMBER (S): 122-5087-1116
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1901. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a boxed cornice; a wide frieze; and square, wood columns resting on brick pedestals. The primary entrances are located within the vestibule and are comprised of single-leaf, metal, paneled doors with a fan-shaped light surmounted by boarded transoms. The house features 1/1, wood, double-hung sash windows with storm windows. The façade gable is closed and features paired, 6/6, wood, double-hung sash windows with storm windows. There is a two-story canted bay on the west elevation surmounted by a closed gable. The roof is gable clad in asphalt shingles with a boxed cornice. There is a two-story ell appended to the south elevation. The ell features a second story porch. The house features an interior, brick chimney with a corbelled cap and a metal chimney pot on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **324 36th Street**
PROPERTY NAME: House, 324 36th Street
OTHER NAME (S): Duplex, 324-326 36th Street/Apartment Building, 324 36th Street
CONSTRUCTION DATE: 1935
DHR NUMBER (S): 122-5087-1117
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1935. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a two-story porch with an asphalt-shingled, shed roof. The first story porch features square, wood piers and a wood, lattice balustrade. The second story porch has been enclosed with vinyl siding punctuated by 3/1, wood, double-hung sash windows. The house features two entrances on the façade. The west entrance is comprised of a single-leaf door with multiple lights and a storm door. The east entrance is comprised of a single-leaf, metal door with six lights and a storm door surmounted by a gable-roofed overhang supported by wood brackets. The house features 3/1, wood, double-hung sash windows with storm windows. Metal bars have been applied to the first story façade windows. There is a single-leaf door on the second story of the east elevation that is accessed by a wood stair. The roof is side gable clad in asphalt shingles. This house has been converted into an apartment building.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **325 36th Street**

PROPERTY NAME: House, 325 36th Street
OTHER NAME (S): Duplex, 325 36th Street
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-1118
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1907. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; a wide frieze; square, wood columns; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a transom. The house features 1/1 and 2/2, wood, double-hung sash windows with storm windows. The façade gable is closed and features paired, 1/1, wood, double-hung sash windows. There is a two-story, projecting, canted bay surmounted by an intersecting, closed gable on the east elevation. There is a single-leaf entrance on the second story of the east elevation. The entrance is surmounted by a shed-roofed overhang supported by brackets and is accessed by a wood stair. The roof is gable clad in asphalt shingles with a boxed cornice. The house features an interior, brick chimney on the east elevation.

- This is a one-story garage designed in the Queen Anne style and constructed circa 1910. It incorporates a wood frame structural system clad in wood shingles. The garage features double-leaf, wood doors with six lights. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **328 36th Street**
PROPERTY NAME: House, 328 36th Street
OTHER NAME (S): Apartment Building, 328 36th Street
CONSTRUCTION DATE: 1935
DHR NUMBER (S): 122-5087-1119
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1935. It incorporates a brick foundation and a wood frame structural system. The first story façade is clad in vinyl siding and the second story façade and side elevations are clad in aluminum siding. The south façade features a one-story, three-bay porch with a central entrance incorporated under a shed roof extending from the main roof. The porch features plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal door. The house features individual and paired, 3/1 and 6/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the first story façade windows. There is an oversized, shed-roofed dormer on the façade that shelters a second story porch. The second story porch is accessed by a single-leaf door with multiple light and features plain, wood posts; an aluminum-clad balustrade; and a metal awning. There is a single-leaf door with a storm door surmounted by a metal awning on the west elevation. The roof is side-gable clad in asphalt shingles. This house has been converted into an apartment building.

- This is a two-story tenant house designed in the Modern Movement style and constructed circa 1950. It incorporates a concrete slab foundation and a wood frame structural system clad in vinyl siding. An

entrance is located on the second story of the south façade. The entrance is comprised of a single-leaf, metal, paneled door with a storm door and is accessed by a wood stair. The tenant house features 1/1, metal, double-hung sash windows; and 8/8, wood, double-hung sash windows flanked by non-functional shutters. The roof is side gable clad in asphalt shingles. The tenant house features a central, interior, brick chimney.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **329 36th Street**
PROPERTY NAME: Apartment Building, 329 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1120
DESCRIPTION (S):
This is a two-and-one-half-story apartment building designed in the Queen Anne style and constructed in 1920. This building was originally a single-family dwelling. An addition was made to the east of the original house circa 1930 enlarging it more than twice its size. It incorporates a brick foundation and a wood frame structural system clad in wood shingles and asbestos siding. The north façade features a one-story, four-bay porch with an asphalt-shingled, hipped roof; a wide frieze; wood, turned posts; and turned balusters. There are three entrances comprised of single-leaf, metal, paneled doors. A transom surmounts the west entrance. The building features 6/6, wood, double-hung sash windows with storm windows; and 1/1, metal, double-hung sash windows. There is a two-story, projecting, canted bay surmounted by an intersecting, closed gable centrally located on the façade. The closed gable features a 1/1, metal, double-hung sash window, and vergeboards at the roof apex. The roof is hipped-cross-gable clad in slate shingles with a boxed cornice and a wide frieze. The building features an intersecting, closed gable on the west elevation. There is an interior, brick chimney on the east elevation.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **331 36th Street**
PROPERTY NAME: House, 331 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1121
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a wide frieze; wood, Tuscan columns; and wood balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door surmounted by a transom. The house features 1/1, metal, double-hung sash windows with storm windows. There is an intersecting, closed gable on the east end of the façade. The closed gable is clad in diamond-cut, wood shingles and features a 1/1, double-hung sash window flanked by one-light, wood casement windows, and

spindlework vergeboards. There are intersecting, closed gables on the east and west elevations. The roof is hipped-cross-gable clad in asphalt shingles with a boxed cornice and a wide frieze. The house features an interior, parged brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **400 36th Street**
PROPERTY NAME: House, 400 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1940
DHR NUMBER (S): 122-5087-1122
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1940. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a gable-roofed entrance block that is comprised of a single-leaf, wood paneled door with lights and a storm door. There is a two-story, gable-roofed, projecting, squared block on the west end of the façade. The house features 1/1, metal, double-hung sash windows; and 6/1, wood, double-hung sash windows with storm windows. There is a shed-roofed dormer on the façade that features tripartite, 1/1, metal, double-hung sash windows. There is a shed-roofed ell appended to the south end of the east elevation that features 6/1, wood, double-hung sash windows. There is a gable-roofed, projecting, squared bay on the south end on the east elevation. The gable-roofed block features a single-leaf door. The roof is side gable clad in asphalt shingles. The house features an exterior, brick chimney on the north elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1945. It incorporates a wood frame structural system clad in asbestos siding. The garage features double-leaf, wood doors. The roof is hipped clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **401 36th Street**
PROPERTY NAME: Duplex, 401 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1949
DHR NUMBER (S): 122-5087-1123
DESCRIPTION (S):
This is a one-story duplex designed in the Modern Movement style and constructed in 1949. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The duplex occupies a U-shaped footprint on the property. The north façade features a central bay flanked by one-story, projecting, squared block surmounted by intersecting, closed gables. The central bay features two entrances comprised of single-leaf, wood, doors with two lights and storm doors. The entrances are accessed by a common, wood deck with a plain, wood balustrade. The duplex features 6/6, wood, double-hung sash windows with storm windows flanked by non-functional shutters. There are two tripartite windows in the central bay. The tripartite windows are comprised of 20-light, wood, fixed windows flanked by 6/6, wood, double-hung sash windows with storm

windows. The roof is side gable clad in asphalt shingles with wide eaves.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system clad in vinyl siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **408 36th Street**
PROPERTY NAME: House, 408 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1940
DHR NUMBER (S): 122-5087-1124
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Colonial Revival style and constructed in 1940. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a gable-roofed entrance block that is comprised of a single-leaf, wood paneled door with lights and a storm door surmounted by a metal awning. There is a one-and-one-half-story, gable-roofed, projecting, squared block on the west end of the façade. The house features paired, 1/1, metal, double-hung sash windows; and 6/6, wood, double-hung sash windows with storm windows. There is a shed-roofed dormer on the façade that features paired, 1/1, metal, double-hung sash windows. There is a gable-roofed, projecting, squared bay on the north end on the east elevation. The gable-roofed block features a single-leaf door. The roof is side gable clad in asphalt shingles. The house features an exterior, brick chimney with a brick cap on the east elevation and an interior, brick chimney on the north elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1945. It incorporates a wood frame structural system clad in asbestos siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **411 36th Street**
PROPERTY NAME: Apartment Building, 411 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1974
DHR NUMBER (S): 122-5087-1125
DESCRIPTION (S):
This is a one-story apartment building designed in the Modern Movement style and constructed in 1974. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in brick veneer. The entrances are located on the east elevation. The entrances are comprised of single-leaf, metal doors. The building features 2/2, metal, double-hung sash windows with rowlock brick sills flanked by non-functional shutters. The roof is hipped clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **412 36th Street**
PROPERTY NAME: House, 412 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1940
DHR NUMBER (S): 122-5087-1126
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Colonial Revival style and constructed in 1940. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a gable-roofed entrance block that is comprised of a single-leaf, wood, paneled door with nine lights and a wrought iron storm door. There is a one-and-one-half-story, gable-roofed, projecting, squared block on the west end of the façade. The house features paired, 1/1, wood, double-hung sash windows with storm windows surmounted by metal awnings. There is a gable-roofed, projecting, squared bay on the north end on the east elevation. The gable-roofed block features a single-leaf door with a storm door. The roof is side gable clad in asphalt shingles.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1945. It incorporates a wood frame structural system clad in aluminum siding. The garage features double-leaf, wood doors. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **415 36th Street**
PROPERTY NAME: House, 415 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1127
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, gable roof; wrought iron posts and balustrade; and a metal awning. The primary entrance is comprised of a single-leaf, wood, paneled door with lights and a wrought iron storm door. The house features 4/1, wood, double-hung sash windows with storm windows. An asphalt-shingled, pent roof surmounts the first story paired windows on the façade at the west corner and the window and enclosed squared bay on the west elevation. The pent roof features exposed, wood rafters and brackets under the eaves. There is a one-story, gable-roofed, projecting, squared bay on the south end of the west elevation. The gable-roofed block features a single-leaf door with a storm door. The roof is hipped clad in asphalt shingles with exposed, wood rafters under the eaves. The house features a central, interior, parged brick chimney.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in weatherboard siding.

The garage features double-leaf, wood doors with three lights. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **416 36th Street**
PROPERTY NAME: House, 416 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1940
DHR NUMBER (S): 122-5087-1128
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Colonial Revival style and constructed in 1940. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a gable-roofed entrance block that is comprised of a single-leaf door with a storm door surmounted by a metal awning. There is a one-and-one-half-story, gable-roofed, projecting, squared block on the west end of the façade. The house features paired, 6/6, wood, double-hung sash windows with storm windows surmounted by metal awnings. There is a shed-roofed dormer on the façade that features metal, sliding windows. There is a one-story, gable-roofed, projecting, squared bay on the north end on the east elevation. The gable-roofed block features a single-leaf door with a storm door. The roof is side gable clad in asphalt shingles. The house features an interior, brick chimney on the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **419 36th Street**
PROPERTY NAME: House, 419 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1949
DHR NUMBER (S): 122-5087-1129
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Colonial Revival style and constructed in 1949. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a centrally located entrance comprised of a single-leaf, metal, paneled door with two lights and a wrought iron storm door surmounted by a gable-roofed overhang supported by brackets. There is an intersecting gable centrally located on the façade. The house features 1/1 and 4/4, metal, double-hung sash windows with storm windows surmounted by metal awnings. Non-functional shutters flank the first story façade windows. There are two, gable-roofed dormers on the façade that feature 4/1, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles. The house features an interior, brick chimney on the west elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system clad in vinyl siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **420 36th Street**
PROPERTY NAME: House, 420 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1937
DHR NUMBER (S): 122-5087-1130
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Colonial Revival style and constructed in 1937. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features the primary entrance that is located on a projecting, squared entrance bay. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door surmounted by a shed roof extending from the main roof. There is a one-story, projecting, squared block on the west end of the façade that is surmounted by an intersecting gable. The house features 1/1, metal, double-hung sash windows. Non-functional shutters flank the façade windows. There is a one-story, projecting, canted oriel window on the east end of the façade. There is a single-leaf door on the east elevation. The roof is side gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **424 36th Street**
PROPERTY NAME: House, 424 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1937
DHR NUMBER (S): 122-5087-1131
DESCRIPTION (S):
This is a one-story house designed in the Colonial Revival style and constructed in 1937. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, one-bay porch on the east end comprised of a metal awning roof supported by wrought iron posts and a concrete block balustrade. The primary entrance is centrally located and is comprised of a single-leaf, wood door with multiple lights surmounted by a metal awning. There is a one-story, projecting, squared bay on the west end of the façade. The bay features paired, 6/6, wood double-hung sash windows with storm windows surmounted by a metal awning; a circular-shaped, wood, fixed window and an asphalt-shingled, gable roof. There is an intersecting, gable on the west end of the façade. The house features 6/6, wood, double-hung sash windows with storm windows. There is a single-leaf door on the east elevation. The roof is cross-gable clad in asphalt shingles.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1940. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, paneled, roll-up door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **425 36th Street**

PROPERTY NAME: House, 425 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1949
DHR NUMBER (S): 122-5087-1132
DESCRIPTION (S):
This is a one-story house designed in the Colonial Revival style and constructed in 1949. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt shingled, hipped roof; plain, wood posts; and a wrought iron balustrade. There is also a wrought iron balustrade on the porch roof. The primary entrance is comprised of a single-leaf, metal door with a storm door. There is a one-story, projecting, squared bay on the west end of the façade that is surmounted by an intersecting gable. The house features 1/1, metal, double-hung sash windows. Non-functional shutters flank the façade windows. The roof is cross-gable clad in asphalt shingles. There are rectangular louvered vents at the roof apexes on the façade and the east and west elevations.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system clad in vinyl siding. The garage features a wood, paneled, roll-up door with lights. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **428 36th Street**
PROPERTY NAME: House, 428 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1937
DHR NUMBER (S): 122-5087-1133
DESCRIPTION (S):
This is a one-story house designed in the Colonial Revival style and constructed in 1937. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, two-bay porch on the east end. The porch features an asphalt-shingled, shed roof; plain, wood posts; and a brick balustrade. The primary entrance is centrally located and is comprised of a single-leaf door surmounted by a shed roof extending from the main roof and a metal awning. There is a one-story, projecting, squared bay on the west end of the façade that is surmounted by an intersecting gable. The bay features a projecting, canted oriel with a standing-seam metal, hipped roof and a metal awning. The house features 6/6, wood, double-hung sash windows with storm windows surmounted by metal awnings. The roof is cross-gable clad in asphalt shingles. There is a one-story ell appended to north elevation. The ell features a single-leaf door on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **429 36th Street**
PROPERTY NAME: House, 429 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1949
DHR NUMBER (S): 122-5087-1134

DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Colonial Revival style and constructed in 1949. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, enclosed porch that is sheltered by a shed roof extending from the main roof. The porch has been enclosed with vinyl siding punctuated by fixed, vinyl windows. The primary entrance is centrally located and is comprised of a single-leaf, metal door with a light flanked by sidelights. There is a one-story, projecting, squared bay on the east end of the façade that is surmounted by an intersecting gable. The bay features a 6/6, metal, double-hung sash window flanked by non-functional shutters; and an octagonal-shaped, vinyl, louvered vent. The house features 6/6, metal, double-hung sash windows. There is a single-leaf door on the east elevation. The roof is cross-gable clad in asphalt shingles. There is a one-story, shed-roofed ell appended to the south elevation. The house features a central interior, brick chimney with a metal chimney pot.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **433 36th Street**
PROPERTY NAME: House, 433 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1949
DHR NUMBER (S): 122-5087-1135
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Colonial Revival style and constructed in 1949. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, enclosed porch sheltered under a shed roof extending from the main roof. The porch features Jalousie windows and a metal awning. The primary entrance is comprised of a single-leaf door with a wrought iron storm door. The house features individual and paired, 6/6, wood, double-hung sash windows with storm windows surmounted by metal awnings. There are two, gable-roofed dormers on the façade that features 6/6, wood, double-hung sash windows with storm windows surmounted by metal awnings. The roof is side gable clad in asphalt shingles. There is a one-story ell appended to the south elevation. The house features a central interior, brick chimney with a metal chimney pot.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, roll-up door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **441 36th Street**
PROPERTY NAME: Store, 441 36th Street
OTHER NAME (S): Norfolk Bible Baptist Church
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-1136
DESCRIPTION (S):
This is a one-story store designed in the Late 19th and Early 20th Century American Movement style and

constructed in 1915. It incorporates a concrete slab foundation and a concrete block structural system clad in weatherboard. The east elevation has been parged. The building features a canted entrance on the southwest corner. The primary entrance is comprised of a single-leaf, metal door surmounted by a boarded transom. The west elevation features two storefronts comprised of recessed, single-leaf doors and fixed, metal, storefront windows. The storefronts are surmounted by diagonally hung weatherboard. There is a single-leaf, metal door on the south elevation. The north elevation features a metal, roll-up door and a single-leaf, wood door surmounted by a transom. A projecting, metal overhang supported by metal posts surmounts the two doors on the north elevation. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **509 36th Street**
PROPERTY NAME: House, 509 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1137
DESCRIPTION (S):
This is a two-story Bungalow constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, three-bay porch incorporated under the main roof. The porch features clustered, wood posts resting on aluminum-clad pedestals and an aluminum-clad balustrade. The primary entrance is comprised of a single-leaf, metal door. The house features 2/2, wood, double-hung sash windows with storm windows. There is an oversized, shed-roofed dormer on the façade that shelters a second story, enclosed porch. The porch features clustered, wood posts resting on an aluminum-clad balustrade and 1/1, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles with brackets under the roof rakes.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **510 36th Street**
PROPERTY NAME: House, 510 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-1138
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1912. It incorporates a 7-course, American bond brick foundation and wood frame structural system. The first story is 7-course, American bond brick and the second story is wood frame clad in asbestos siding. There is a one-story, two-bay porch incorporated under the main roof on the southeast corner of the house. The porch features a brick pier; a wood, turned post; and a replacement, wood balustrade. The primary entrance is comprised of a single-leaf door. The house features individual and paired, 6/6, wood double-hung sash windows with storm windows. The first story windows feature rowlock brick sills. There is a rectangular, metal, louvered vent at the roof apex on the façade gable. The east elevation features an intersecting, hip-roofed

wall dormer with wide eaves. There is a single-leaf door on the east elevation. The roof is catslide clad in asphalt shingles with wide eaves. The house features an exterior, brick chimney on the west elevation. There is a one-story ell appended to the north elevation.

- This is a one-story, two-car garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1915. It incorporates a brick structural system. The garage features two, metal, paneled, roll-up doors. The roof is side gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **515 36th Street**
PROPERTY NAME: House, 515 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1139
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, one-bay porch with an asphalt-shingled, hipped roof; paneled, wood posts resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a storm door. There is a one-story, projecting, canted bay on the east end of the first story façade. The house features 1/1, wood, double-hung sash windows with storm windows. There is a gabled dormer on the facade. There is a two-story, projecting, canted bay surmounted by a closed gable on the east elevation. There is an intersecting gable on the west elevation. There is a single-leaf door on the west elevation. The roof is hipped clad in asphalt shingles. There is a one-story porch incorporated under the main roof on the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **516 36th Street**
PROPERTY NAME: House, 516 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-1140
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1912. It incorporates a stuccoed brick foundation and a wood, frame structural system. The first story has been stuccoed and the second story is clad in wood shingles. The south façade features a one-story, two bay porch with an asphalt-shingled, hipped roof; a dentiled cornice; stuccoed piers; and a wrought iron balustrade. The porch is accessed by a single-leaf, wood, multiple light door with a storm door and a double-leaf, wood door with multiple lights. The primary entrance is comprised of a single-leaf wood door with three lights and a storm door within a projecting squared bay on the east elevation. There are wood brackets surmounting the walkway, which is below the cantilevered second story on the south end of the east wall. The house features paired and tripartite, 6/1 and 9/1, wood, double-hung sash windows with storm windows. There is a one-story, projecting, rounded

bay on the second story of the east elevation surmounting the projecting square entrance bay. There are two, gable-roofed dormers on the east elevation. There is a single-leaf door on the west elevation. The façade gable is closed and features a paired, 4/1, wood, double-hung sash window. The roof is gable clad in asphalt shingles with wide eaves. The house features an exterior, parged brick chimney on the west elevation.

- This is a one-story garage designed in the Craftsman style constructed circa 1915. It incorporates a wood frame structural system clad in wood shingles. The garage features a wood, paneled, roll-up door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **517 36th Street**
PROPERTY NAME: House, 517 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1141
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. There is a one-story, two-bay porch incorporated under the main roof. The porch features clustered, wood posts resting on asbestos-clad pedestals; and an asbestos-clad balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with three lights flanked by 5-light sidelights. The house features individual and tripartite, 2/2, wood double-hung sash windows with storm windows. The first story façade features a tripartite window of a 1/1, wood, double-hung sash window flanked by 1/1, wood, triple-hung sash windows. There are two, fixed, wood, Queen Anne windows on the first story of the west elevation. There is an oversized, shed-roofed dormer on the façade that shelters a second story, one-bay porch. The porch features clustered, wood posts resting on an asbestos-clad balustrade. The porch is accessed by a single-leaf door with a metal storm door. The roof is side gable clad in asphalt shingles with brackets under the roof rakes. The house features a central, interior, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **519 36th Street**
PROPERTY NAME: House, 519 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1142
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. There is a one-story, two-bay porch incorporated under the main roof. The porch features battered, wood piers resting on stuccoed pedestals; and a stuccoed balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. There is

an oversized, shed-roofed dormer on the façade that features a plain, wood balustrade; brackets under the rakes; and exposed, wood rafters under the eaves. There is a one-story, projecting, squared oriel on the west elevation that is surmounted by an asphalt-shingled, shed roof with exposed, wood rafters. The roof is side gable clad in asphalt shingles with brackets under the roof rakes.

- This is a one-and-one-half-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in weatherboard siding. The garage features a double-leaf, wood door; a single-leaf, wood door; and a 3-light, wood, casement window at the roof apex. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **521 36th Street**
PROPERTY NAME: House, 521 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1143
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. There is a one-story, two-bay porch incorporated under the main roof. The porch features clustered, square, wood piers resting on stuccoed pedestals; and a stuccoed balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a storm door. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. There is an oversized, shed-roofed dormer on the façade that features a plain, wood balustrade. There is a one-story, projecting, squared oriel on the west elevation that is surmounted by an asphalt-shingled, shed roof. The roof is side gable clad in asphalt shingles. The house features an exterior, brick chimney on the west elevation. There is a one-story ell appended to the south elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1945. It incorporates a wood frame structural system clad in aluminum siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **524 36th Street**
PROPERTY NAME: House, 524 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-1144
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1915. It incorporates a stuccoed brick foundation and a wood frame structural system that has been stuccoed. The south façade features a one-story, two-bay porch incorporated within the building. The

porch features stuccoed jack arch friezes between stuccoed brick piers; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with multiple lights and a wrought iron storm door surmounted by a multiple light transom and flanked by 4-light sidelights. The house features 1/1, wood, double-hung sash windows surmounted by 6, 8, and 12-light, wood transom windows. There is a two-story, projecting, squared bay on the southeast corner of the house. The bay features 6-light clerestory windows under a raised, hipped roof. The area above the second story is clad in aluminum siding punctuated by 8-light, wood, casement windows. There are hip-roofed, wall dormers on the east and west elevations. There are solar panels appended to the roof on the west end of the façade. There is a single-leaf door with a storm door on the west elevation. The roof is hipped clad in asphalt shingles. The house features an exterior, parged brick chimney with a metal chimney pot.

- This is a one-story garage designed in the Modern Movement style constructed circa 1945. It incorporates a wood frame structural system clad in stucco and an asphalt-shingled gable roof.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **526 36th Street**
PROPERTY NAME: House, 526 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1909
DHR NUMBER (S): 122-5087-1145
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1909. It incorporates a brick foundation and a wood frame structural system. The first story is clad in aluminum siding and the second story has been stuccoed. The south façade features a one-story, two-bay porch incorporated within the building. The porch features paired, wood piers resting on aluminum-clad pedestals; and an aluminum-clad balustrade. The primary entrance is comprised of a single-leaf, wood door with a diamond-shaped light and a storm door surmounted by a transom. The house features tripartite window of 1/1, wood, double-hung sash windows flanked by 4/1, wood, double-hung sash windows on the façade. Other windows found on the dwelling are 8/1, wood, double-hung sash. There are gable-roofed, wall dormers on the façade and the east and west elevations. The façade wall dormer features paired, 8-light, wood, casement windows. The roof is hipped clad in asphalt shingles. The house features an interior, parged brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **527 36th Street**
PROPERTY NAME: Apartment Buildings, 527 36th Street
OTHER NAME (S): Anchorage Apartments, 527 36th Street & Norment Apartments, 533 36th Street
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1146
DESCRIPTION (S):

This is a three-story apartment building designed in the Late 19th and Early 20th Century American Movement and constructed in 1918. It incorporates a brick foundation and 7-course, American bond brick structural system. The north façade is clad in brick veneer. The north façade features two, three-story, one-bay porches flanking a central entrance block. The porches feature asphalt-shingled, hipped roofs; parged brick piers on the third story resting on tall, brick piers with triangular-shaped, limestone medallions surmounted by patterned brickwork capitals at each story and limestone banding; and plain, wood balustrades. The porches are accessed by single-leaf, wood, 15-light, doors with screen doors surmounted by transoms and flanked by 6/1, wood, double-hung sash windows. The primary entrance is centrally located on the façade between the porches. The single-leaf door is flanked by boarded sidelights and surmounted by a multiple light transom and is located within the vestibule. Surmounting the entrance is a panel with soldier-course bricks surrounding a limestone slab etched with "ANCHORAGE." The building features individual and paired, 6/1, wood, double-hung sash windows with rowlock brick sills and soldier-course brick lintels. The roof is flat with a stepped parapet coped in metal. There are triangular-shaped medallions on the façade parapet. The east wall has been lightly parged.

- This is a three-story apartment building designed in the Late 19th and Early 20th Century American Movement and constructed in 1918. It incorporates a brick foundation and 7-course, American bond brick structural system. The north façade is clad in brick veneer. The north façade features two, three-story, one-bay porches flanking a central entrance block. The porches feature asphalt-shingled, hipped roofs; parged brick piers on the third story resting on tall, brick piers with triangular-shaped, limestone medallions surmounted by patterned brickwork capitals at each story and limestone banding; and plain, wood balustrades. The porches are accessed by single-leaf, wood, 15-light, doors with screen doors surmounted by transoms and flanked by 6/1, wood, double-hung sash windows. The primary entrance is centrally located on the façade between the porches. The single-leaf door is flanked by boarded sidelights and surmounted by a multiple light transom and is located within the vestibule. Surmounting the entrance is a panel with soldier-course bricks surrounding a limestone slab etched with "NORMENT." The building features individual and paired, 6/1, wood, double-hung sash windows with rowlock brick sills and soldier-course brick lintels. The roof is flat with a stepped parapet that has been coped with stucco. There are triangular-shaped, brick medallions at the roofline on the façade.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **535 36th Street**
PROPERTY NAME: Apartment Building, 535 36th Street
OTHER NAME (S): Parker Apartments, 539 36th Street
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1147
DESCRIPTION (S):

This is a three-story apartment building designed in the Late 19th and Early 20th Century American Movement and constructed in 1918. It incorporates a brick foundation and 7-course, American bond brick structural system. The north façade is clad in brick veneer. The north façade features two, three-story, one-bay porches flanking a central entrance block. The porches feature asphalt-shingled, hipped roofs; parged brick piers on the third story resting on tall, brick piers with triangular-shaped, limestone medallions surmounted by patterned

brickwork capitals at each story and limestone banding; and plain, wood balustrades. The porches are accessed by single-leaf, wood, 15-light, doors with screen doors surmounted by transoms and flanked by 6/1, wood, double-hung sash windows. The primary entrance is centrally located on the façade between the porches. The single-leaf door is flanked by boarded sidelights and surmounted by a multiple light transom and is located within the vestibule. Surmounting the entrance is a panel with soldier-course bricks surrounding a limestone slab etched with "PARKER." The features individual and paired, 1/1, metal, double-hung sash windows with rowlock brick sills and soldier-course brick lintels. The roof is flat with a stepped parapet coped in a rowlock brick course. The stepped parapet on the façade has been stuccoed.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **536 36th Street**
PROPERTY NAME: House, 536 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1148
DESCRIPTION (S):
This is a two-story house designed in the Spanish Mission style and constructed in 1916. It incorporates a brick foundation and a brick and wood frame structural system clad in stucco. The south façade features a one-story, two-bay porch incorporated within the building. The porch features stuccoed brick piers and a wrought iron balustrade. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a 4-light transom. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. There is a centrally located wall dormer on the façade that features paired, 6/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles with wide eaves. There is a one-story porch incorporated under the main roof on the north elevation. The house features an interior, parged brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **603 36th Street**
PROPERTY NAME: House, 603 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1149
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. There is a one-story, two-bay porch incorporated under the main roof. The porch features squared, wood columns resting on parged brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood door surmounted by a transom and flanked by sidelights. The house features individual and paired, 1/1 and 6/1, wood double-hung sash windows with storm windows; and wood, double-hung Queen Anne windows. There is an oversized, hip-roofed dormer on the façade that shelters a second story,

three-bay porch. The porch features clustered, wood posts resting on an asbestos-clad balustrade. The porch is accessed by a single-leaf door with a storm door. The roof is side gable clad in asphalt shingles. There is a one-story, shed-roofed ell appended to the south elevation. The house features an interior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **605 36th Street**
PROPERTY NAME: House, 605 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-1150
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1915. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. There is a one-story, two-bay porch incorporated under the main roof. The porch features clustered, wood-paneled piers resting on brick pedestals; a square, wood pier resting on a wood-paneled pedestal; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light surmounted by a multiple-light transom and flanked by boarded sidelights. The house features individual and tripartite, 1/1, metal, double-hung sash windows. Non-functional shutters flank the first story façade windows. There is a one-story, projecting, canted oriel surmounted by an asphalt-shingled, hipped roof on the west elevation. There is an oversized, shed-roofed dormer on the façade that shelters an enclosed second story porch. The porch features clustered, wood posts resting on an aluminum-clad balustrade on the west corner. The porch is clad in aluminum siding punctuated by fixed, metal windows. The roof is side gable clad in asphalt shingles. The house features an exterior, brick chimney with a corbelled cap on the west elevation. There is a one-story porch incorporated under the main roof on the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **608 36th Street**
PROPERTY NAME: House, 608 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-1151
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1915. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, shed roof with exposed, wood rafters under the eaves; squat asbestos-clad piers resting on brick pedestals; wrought iron posts resting on brick pedestals; and a plain, wood balustrade. The primary entrance is centrally located and is comprised of a single-leaf, wood, paneled door with two lights and a storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a shed-roofed dormer on the façade that features tripartite, 1/1, metal, double-

hung sash windows and exposed, wood rafters under the eaves. The roof is side gable clad in asphalt shingles with exposed, wood rafters under the eaves. The house features an interior, brick chimney on the west elevation. There is a one-story ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **610 36th Street**
PROPERTY NAME: House, 610 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1908
DHR NUMBER (S): 122-5087-1152
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1908. It incorporates a brick foundation and a 7-course American bond brick structural system clad in brick veneer. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns resting on brick pedestals; turned balusters; and a metal awning. The primary entrance is comprised of a single-leaf door flanked by sidelights. The house features individual and paired, 9/1, wood, double-hung sash windows with storm windows. There is a hip-roofed dormer on the façade that features tripartite, 9/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in slate shingles with wide eaves. The house features an interior, brick chimney with a corbelled cap on the west elevation and an interior, parged brick chimney on the east elevation.

- This is a one-story, three-car garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a brick structural system. The garage features two, double-leaf, wood, roll-up doors; and a set of double-leaf, wood garage doors with 6 lights. The roof is flat with a parapet.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **613 36th Street**
PROPERTY NAME: House, 613 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1923
DHR NUMBER (S): 122-5087-1153
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1923. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; and wrought iron posts and balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with lights and a wrought iron storm door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. The façade gable is closed and features paired, 1/1, wood, double-hung sash windows with storm windows. The roof is gable clad in asphalt shingles with a boxed cornice. There is an interior brick chimney at the south end. There is a one-story ell appended to the south elevation.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system clad in pressure treated lumber. The roof is a catslide form clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **614 36th Street**
PROPERTY NAME: House, 614 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1154
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1917. It incorporates a brick foundation and brick structural system clad in brick veneer. The south façade features a one-story, one-bay porch with an asphalt-shingled, hipped roof; brick piers; and a brick balustrade. The primary entrance is comprised of a single-leaf, metal door with an oval light and a wrought iron storm door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows and rowlock brick sills surmounted by 2-course, round arch, solider-course brick jack arches. There are hip-roofed dormers on the façade and the east elevation that are clad in wood shingles. The dormers feature paired, 1/1, wood, double-hung sash windows with storm windows. There is a single-leaf door surmounted by a metal awning on the east elevation. The roof is hipped clad in slate shingles with wide eaves. The house features exterior, brick chimneys with a corbelled caps on the east and west elevations. There is a two-story ell appended to the north elevation that features a porch incorporated under the main roof. The second-story of the ell is clad in vinyl siding.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **615 36th Street**
PROPERTY NAME: House, 615 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1923
DHR NUMBER (S): 122-5087-1155
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1923. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, one-bay porch with an asphalt-shingled, gable roof; battered, wood piers resting on brick pedestals; a plain, wood balustrade; and a metal awning. The primary entrance is comprised of a single-leaf, metal door with an oval light and a storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles with wide eaves. There is a one-story porch incorporated under the main roof on the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **616 36th Street**
PROPERTY NAME: House, 616 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1156
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1916. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a two-story porch incorporated under hipped roof that intersects the main side-gable roof. There is a shed roof that extends from the hipped roof surmounting the porch as well. The first story porch has two bay and features clustered, wood piers resting on brick pedestals; and a plain, wood balustrade. The second story porch has been enclosed with vinyl siding and is punctuated by 4/4, wood, double-hung sash windows with storm windows. The primary entrance is comprised of a single-leaf wood, paneled door with multiple lights surmounted by a multiple light transom and flanked by 5-light sidelights. The house features 1/1, wood, double-hung sash windows with storm windows. There is a hip-roofed dormer on the façade that features paired, 1/1, wood, double-hung sash windows with storm windows. There is a single-leaf door surmounted by a shed-roofed overhang on the west elevation. There is a one-story, projecting, squared oriel on the east elevation that is surmounted by a shed roof. The roof is hipped-side-gable clad in asphalt shingles with wide eaves. There is a one-story ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **617 36th Street**
PROPERTY NAME: House, 617 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1923
DHR NUMBER (S): 122-5087-1157
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1923. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch incorporated under a shed roof extending from the main roof. The porch features wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with six lights and two panels with a storm door surmounted by a transom. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There are oversized, shed-roofed dormers on the façade and the south elevation that feature exposed, wood rafters under the eaves. The roof is side gable clad in asphalt shingles. The house features an interior, parged brick chimney with on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **618 36th Street**
PROPERTY NAME: House, 618 36th Street

OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1158
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1916. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a two-story porch incorporated under a hipped roof that intersects the main side-gable roof. There is a shed roof that extends from the hipped roof surmounting the porch as well. The first story porch has two bay and features vinyl-clad piers and balustrade. The second story porch has been enclosed with vinyl siding punctuated by paired, metal screens. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. There is a hip-roofed dormer on the façade that features paired, 1/1, wood, double-hung sash windows with storm windows. There is a single-leaf door on the east elevation. The roof is hipped-side-gable clad in asphalt shingles with wide eaves. There is a one-story, shed-roofed ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **621 36th Street**
PROPERTY NAME: House, 621 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1159
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1917. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; wood, Corinthian columns resting on parged brick pedestals; and a plain, wood balustrade. There is a two-story, projecting, squared block on the west end of the façade surmounted by a wood shingled closed gable. The primary entrance is comprised of a single-leaf door with a storm door. The house features 1/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the windows on the projecting block. There are intersecting, closed gables on the east and west elevations. There is a one-story, hip-roofed addition appended to the south end of the east elevation. The roof is hipped-cross-gable clad in asphalt shingles with wide eaves. There is a one-story ell appended to the north elevation. There is a two-story ell appended to the south elevation. The house features a central, interior, brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **622 36th Street**
PROPERTY NAME: House, 622 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1160

DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1916. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The south façade features a two-story porch incorporated under a hipped roof that intersects with the main side-gable roof. There is a shed roof that extends from the hipped roof surmounting the porch as well. The first story porch features a false, asphalt-shingled, hipped roof; and vinyl-clad piers and balustrade. The second story porch has been enclosed with vinyl siding punctuated by 4/4, wood, double-hung sash windows with storm windows. The primary entrance is comprised of a single-leaf door with a storm door flanked by boarded sidelights. The house features 1/1, wood, double-hung sash windows with storm windows. There is a hip-roofed dormer on the façade that features paired, 1/1, wood, double-hung sash windows with storm windows. There is a single-leaf door surmounted by a shed-roofed overhang on the west elevation. The roof is hipped-side-gable clad in asphalt shingles with wide eaves. There is a one-story, shed-roofed ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **624 36th Street**
PROPERTY NAME: House, 624 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1949
DHR NUMBER (S): 122-5087-1161
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1949. It incorporates a brick foundation and a wood frame structural system clad in brick veneer. The south façade features a one-story, one-bay porch incorporated under the main roof on the east end. The porch features a plain, wood post. The primary entrance is comprised of a single-leaf, wood, door with a diamond-shaped light. The house features individual and paired, 1/1, metal, double-hung sash windows with rowlock brick sills. The roof is gable clad in asphalt shingles. The façade gable is clad in vinyl siding. The house features an interior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **625 36th Street**
PROPERTY NAME: House, 625 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1924
DHR NUMBER (S): 122-5087-1162
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1924. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features square, wood piers resting on brick pedestals; a square, wood pier; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door surmounted by a transom and flanked

by sidelights. The house features individual and tripartite, 1/1 and 6/6, metal, double-hung sash windows with storm windows. There is an oversized, shed-roofed dormer on the façade that features 6/6, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles. There is a one-story, shed-roofed ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **629 36th Street**
PROPERTY NAME: House, 629 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1923
DHR NUMBER (S): 122-5087-1163
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1923. It incorporates a brick foundation and brick structural system clad in brick veneer. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof with exposed, wood rafters under the eaves; battered, wood piers resting on brick pedestals; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a storm door flanked by 5-light sidelights. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows and rowlock brick sills. There are hip-roofed dormers on the façade and east and west elevations. The dormers are clad in vinyl siding and feature paired, 1/1, wood, double-hung sash windows with storm windows and exposed, wood rafters under the eaves. The roof is hipped clad in asphalt shingles with exposed, wood rafters under the eaves. The house features an exterior, brick chimney with a corbelled cap on the east elevation. There is a two-story, shed-roofed, vinyl-clad ell appended to the south elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1960. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, roll-up door and metal, double-hung sash windows. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **630 36th Street**
PROPERTY NAME: House, 630 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1164
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, shed roof; wood, turned posts; and turned balusters. The primary entrance is comprised of a single-leaf, wood, paneled door with a fan-shaped light and a storm door surmounted by a 6-light transom and flanked by 6-light sidelights. The house features individual and tripartite,

9/1, wood, double-hung sash windows with storm windows. There is a shed-roofed dormer on the façade that features tripartite, 4/4, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles. The house features an interior, partially-parged brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **631 36th Street**
PROPERTY NAME: House, 631 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1923
DHR NUMBER (S): 122-5087-1165
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1923. It incorporates a brick foundation and a wood frame structural system clad in brick veneer. The north façade features a one-story, two-bay porch with an asphalt-shingled, gable roof; battered, wood piers resting on brick pedestals and a wood balustrade. The primary entrance is comprised of a single-leaf, metal door with an oval-shaped light and a storm door flanked by sidelights. The house features 6/6 and 9/9, metal, double-hung sash windows. There is a one-story, projecting, canted bay on the east end of the first story façade. There is a single-leaf door surmounted by an asphalt-shingled, shed roof on the west elevation. The façade gable is clad in vinyl siding and features paired, 9/9, metal, double-hung sash windows. The roof is gable clad in asphalt shingles with wide eaves. The building features an exterior, brick chimney on the east elevation. There is a one-story, shed-roofed, vinyl-clad ell appended to the south elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1925. It incorporates a wood frame structural system clad in vinyl siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **633 36th Street**
PROPERTY NAME: House, 633 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1923
DHR NUMBER (S): 122-5087-1166
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1923. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, wood door with a storm door surmounted by a 5-light transom and flanked by boarded sidelights. The house features wood, Queen Anne, double-hung sash windows with storm windows. There is an oversized, shed-roofed dormer on the façade that shelters a second story, three-bay porch. The porch features asbestos-clad and plain, wood posts; and an asbestos-clad balustrade. The porch is accessed by a single-leaf, wood door with nine lights. The roof is

side gable clad in asphalt shingles. There is a one-story, shed-roofed ell appended to the south elevation. The house features an interior, brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **634 36th Street**
PROPERTY NAME: House, 634 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1989
DHR NUMBER (S): 122-5087-1167
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1989. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system. The first story façade is clad in brick veneer and the second story façade and side elevations are clad in vinyl siding. The south facade features a one-story, one-bay porch with an asphalt-shingled, shed roof; wood, turned posts; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a wrought iron storm door flanked on the west by a 3-light sidelight. The house features 6/6, metal, double-hung sash windows flanked by non-functional shutters. The first story façade windows feature rowlock brick sills. There is a one-story porte-cochere appended to the east elevation. The porte-cochere features an asphalt-shingled, gable roof supported by brick piers. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **635 36th Street**
PROPERTY NAME: House, 635 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-1168
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1922. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. There is a one-story, two-bay porch incorporated under the main roof. The porch features clustered, wood posts resting on brick pedestals; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a wrought iron storm door. The house features individual and paired 6/1, wood double-hung sash windows with storm windows. There is an oversized, hip-roofed dormer on the façade that shelters a second story porch. The porch features clustered, wood posts resting on a vinyl-clad balustrade. The porch is accessed by a single-leaf, wood door with multiple lights flanked by multiple-light sidelights. The roof is side gable clad in asphalt shingles. The house features an interior, brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **636 36th Street**
PROPERTY NAME: House, 636 36th Street

OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1169
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1916. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The south façade features a two-story porch incorporated under a shed roof extending from the main roof. The first story porch has two bays and features a false, asphalt-shingled, hipped roof; clustered, wood piers resting on parged brick pedestals; and a plain, wood balustrade. The second story porch has three bays and features clustered, wood piers resting on aluminum-clad pedestals; plain, wood posts; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood door with a storm door surmounted by a transom and flanked by 2-light, wood-paneled sidelights. The house features 1/1, wood, double-hung sash windows with storm windows. There is a gable-roofed dormer on the façade that features paired, 1/1, wood, double-hung sash windows. The roof is side gable clad in asphalt shingles. There is a one-story, shed-roofed ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **637 36th Street**
PROPERTY NAME: House, 637 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-1170
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1922. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; paneled, wood columns; and turned balusters. The primary entrance is comprised of a single-leaf, wood door with a light and a storm door surmounted by a transom. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a one-story, projecting, canted bay on the west elevation that is surmounted by a hipped roof. The roof is side gable clad in asphalt shingles with wide eaves.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **639 36th Street**
PROPERTY NAME: House, 639 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1171
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features

battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood door with a fan-shaped light and a wrought iron storm door surmounted by a transom. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is an oversized, shed-roofed dormer on the façade that features 1/1, metal, double-hung sash windows. There is a shed-roofed dormer on the south elevation. The roof is side gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **645 36th Street**
PROPERTY NAME: House, 645 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1989
DHR NUMBER (S): 122-5087-1172
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1989. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system. The first story façade is clad in brick veneer and the second story façade and side elevations are clad in vinyl siding. The north facade features a one-story, one-bay porch with an asphalt-shingled, shed roof; wood, turned posts; applied wood lattice; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door flanked on the west by a 3-light sidelight. The house features 6/6, metal, double-hung sash windows flanked by non-functional shutters. The first story façade windows feature rowlock brick sills. There is a one-story porte-cochere appended to the east elevation. The porte-cochere features an asphalt-shingled, gable roof; brick piers; and a single-leaf door accessing the house. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **701 36th Street**
PROPERTY NAME: House, 701 36th Street
OTHER NAME (S): Duplex, 701 36th Street
CONSTRUCTION DATE: 1908
DHR NUMBER (S): 122-5087-1173
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1908. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north facade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; a boxed cornice; and vinyl-clad posts and balustrade. The east elevation of the porch has been enclosed in vinyl siding punctuated by tripartite windows. There are two entrances on the north façade. The east entrance is comprised of a single-leaf, metal door with a wrought iron storm door surmounted by a transom. The west entrance is comprised of a single-leaf, wood, 15-light door with a storm door surmounted by a boarded transom. The house features 6/1, wood, double-hung sash windows. There is a one-story, projecting, canted bay on the east elevation that is surmounted by an asphalt-shingled, hipped roof. The roof is hipped clad in asphalt shingles.

The house features a central, interior, parged brick chimney with a corbelled cap. There is a one-story, shed roofed ell appended to the south elevation. There is a two-story, hip-roofed addition appended to the southeast corner of the house. The addition features a one-story porch incorporated under the main roof. This house has been converted into a duplex.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **705 36th Street**
PROPERTY NAME: Duplex, 705 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1985
DHR NUMBER (S): 122-5087-1174
DESCRIPTION (S):
This is a one-story duplex designed in the Modern Movement style and constructed in 1985. It incorporates a concrete foundation and a wood frame structural system clad in brick veneer. There are two, single-leaf, metal doors on the east and the west elevation. The building features 1/1, metal, double-hung sash windows with rowlock brick sills. The roof is side gable clad in asphalt shingles with wide eaves.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **707 36th Street**
PROPERTY NAME: House, 707 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1175
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1916. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The north façade features a two-story porch incorporated under the main roof. The first story porch has two bays and features wrought iron posts, brackets, and a balustrade. The second story porch has been enclosed and is clad in aluminum siding punctuated by 6-light, wood casement windows flanked by non-functional shutters. The primary entrance is comprised of a single-leaf, wood door surmounted by a transom and flanked by boarded sidelights. The house features 1/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the windows. There is a single-leaf door surmounted by an asphalt-shingled shed roof on the west elevation. The roof is side gable clad in asphalt shingles. The house features an interior, brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **708 36th Street**
PROPERTY NAME: Duplex, 708 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917

DHR NUMBER (S): 122-5087-1176
DESCRIPTION (S):
This is a two-story duplex house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1917. It incorporates a brick foundation and 6-course, American bond brick structural system. The south façade is clad in common bond brick veneer. The south façade features a two-story, two-bay porch with an asphalt-shingled, hipped roof; plain, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a wrought iron storm door. The second story porch is accessed by a single-leaf, wood door with multiple lights and a storm door. The duplex features individual and paired, 1/1, wood, double-hung sash windows with storm windows and rowlock brick sills. The roof is flat with a parapet coped in a rowlock brick course. The parapet features a corbelled brick cornice on the façade. The building features an interior, brick chimney with a corbelled cap embedded in the east elevation wall. There is a two-story porch appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **710 36th Street**
PROPERTY NAME: House, 710 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-1177
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1906. It incorporates a brick foundation and a wood frame structural system clad wood shingles. The north facade features a two-story porch with an asphalt-shingled, hipped roof. The first story porch wraparound the west elevation and features an asphalt-shingled, hipped roof; a boxed cornice; wood-shingled posts; a plain, wood balustrade; and a metal awning. The second story porch has been enclosed and is clad in wood shingles punctuated by tripartite, wood, 1/1, double-hung sash windows. The primary entrance is comprised of a single-leaf door flanked by multiple-light sidelights. The house features individual and tripartite, 1/1, wood, double-hung sash windows. There is dormer on the façade that features paired, double-hung sash windows. The roof is hipped clad in asphalt shingles with a boxed cornice and wide eaves. The house features an interior, brick chimney on the west elevation.

- This is a one-story garage designed in the Late 19th and early 20th Century American Movement style and constructed circa 1910. It incorporates a wood frame structural system clad in weatherboard. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **713 36th Street**
PROPERTY NAME: House, 713 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1178

DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, enclosed porch with an asphalt-shingled, gable roof; battered, wood piers resting on brick pedestals; an aluminum-clad balustrade; 1/1, metal, double-hung sash windows; and a metal awning. The primary entrance is comprised of a single-leaf, wood door with 8-lights and a wrought iron storm door. The house features 6/1, wood, double-hung sash windows. Asphalt-shingled, shed roofs surmount the façade windows. The façade gable features a rectangular-shaped, vinyl, louvered vent. There is a single-leaf door surmounted by an asphalt-shingled, pent roof supported by brackets on the east elevation. The roof is gable clad in asphalt shingles with wide eaves and brackets under the roof rakes. The building features an interior, brick chimney on the east elevation. There is a one-story ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **714 36th Street**
PROPERTY NAME: House, 714 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1179
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system. The first story is clad in vinyl siding. The second story of the south façade is clad in asbestos shingles and the second story of the east and west elevations are clad in wood shingles. The south façade features a one-story, two-bay porch with an asphalt-shingled, shed roof with exposed, wood rafters under the eaves; battered, wood piers resting on brick pedestals; a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood door with 8-lights and a storm door surmounted by a multiple-light transom and flanked by 4-light, wood-paneled sidelights. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The façade gable features a 1/6, wood, double-hung sash window. There is a single-leaf door surmounted by an asphalt-shingled, shed roof on the west elevation. The roof is Jerkinhead gable clad in asphalt shingles with exposed, wood rafters under the eaves and brackets under the roof rakes.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **716 36th Street**
PROPERTY NAME: House, 716 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-1180
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1907. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story,

two-bay porch with an asphalt-shingled, hipped roof; battered, wood piers; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door. The house features 6/1, wood, double-hung sash windows with storm windows. There is a one-story, projecting, canted bay on the east end of the first story façade that features wood, Queen Anne, fixed windows. The façade gable features a rectangular-shaped, wood, louvered vent. There is a one-story, projecting canted bay on the west elevation. There is a shed-roofed dormer on the east elevation. The roof is gable clad in asphalt shingles with exposed outriggers on the façade.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **717 36th Street**
PROPERTY NAME: House, 717 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-1181
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1912. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The north façade features a one-story, three-bay porch incorporated under a shed roof extending from the main roof. The porch features clustered, wood posts resting on brick pedestals; a wood-shingled balustrade with plain, wood baluster details; and a metal awning. The primary entrance is comprised of a single-leaf, wood door. The house features 6/1, wood, double-hung sash windows with storm windows. There is an oversized, shed-roofed dormer on the façade that features 6/1, wood, double-hung sash windows and brackets under the roof rakes. There is a one-story, projecting, squared oriel on the west elevation that is surmounted by an asphalt-shingled, shed roof. The roof is side gable clad in asphalt shingles with brackets under the roof rakes. The house features an interior, parged brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **719 36th Street**
PROPERTY NAME: House, 719 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1182
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, one-bay porch incorporated under the main roof. The porch features vinyl-clad piers resting on brick pedestals; and a vinyl-clad balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light. The house features 6/1 and 1/1, wood, double-hung sash windows with storm windows. There is an oversized, shed-roofed dormer on the façade that features 1/1, wood, double-hung sash windows and brackets under the roof rakes. There is a one-story, projecting, squared oriel on the west elevation that is surmounted by an asphalt-shingled, shed roof. The roof is side gable clad in

asphalt shingles with brackets under the raking cornice. The house features an interior, parged brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **720 36th Street**
PROPERTY NAME: House, 720 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-1183
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1907. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof. The porch is currently undergoing renovation. The primary entrance is centrally located and is boarded. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable features a 1/1, metal, double-hung sash window and modillions on the roof cornice. The house features 1/1, metal, double-hung sash windows. There is a two-story, projecting, squared block surmounted by a closed gable on the west elevation. There are hip-roofed dormers on the façade and the east elevation that features modillions on the roof cornice. The roof is hipped-cross-gable clad in asphalt shingles with a wide frieze and modillions on the cornice. The house features two interior, brick chimneys with corbelled caps on the west elevation, and an exterior, brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **721 36th Street**
PROPERTY NAME: House, 721 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1184
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood door with multiple lights and a storm door flanked by boarded sidelights. The house features individual and tripartite, 4/1 and 6/1, wood, double-hung sash windows with storm windows. There is an oversized, shed-roofed dormer on the façade that features metal, sliding windows. The roof is side gable clad in asphalt shingles with brackets on the roof rakes.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **723 36th Street**

PROPERTY NAME: House, 723 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1185
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features wrought iron posts and balustrade. The primary entrance is comprised of a single-leaf, wood door with a storm door surmounted by a 3-light transom and flanked by 5-light sidelights. The house features individual and paired, 4/1 and 1/1, wood, double-hung sash windows with storm windows. There is an oversized, gable-roofed dormer on the façade that features a second story porch. The second story porch features clustered, wood piers resting on a vinyl-clad balustrade. The east end of the second story porch has been enclosed and is clad in vinyl punctuated by 4/1 and 1/1, wood, double-hung sash windows. The second story porch is accessed by a single-leaf, wood door with multiple lights and a storm door. The roof is side gable clad in asphalt shingles. There is a one-story ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **725 36th Street**
PROPERTY NAME: House, 725 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-1186
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1912. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wrought iron posts resting on brick pedestals; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf, metal door with a storm door. The house features 1/1, metal, double-hung sash windows. There is an intersecting, closed gable on the west elevation. The roof is gable clad in asphalt shingles with cornice returns. The building features an interior, parged brick chimney on the east elevation. There is a one-story, shed-roofed, vinyl-clad ell appended to the south elevation. There is a one-story, shed-roofed addition appended to the west elevation. The addition incorporates a concrete block foundation and a wood frame structural system clad in vinyl siding. The addition features 1/1, metal, double-hung sash windows.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **728 36th Street**
PROPERTY NAME: House, 728 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916

DHR NUMBER (S): 122-5087-1187
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1916. It incorporates a brick foundation and wood frame structural system clad in aluminum siding. The south façade features a one-story, two-bay, screened porch with an asphalt-shingled, hipped roof; battered, wood piers resting on brick pedestals; and a brick balustrade. The primary entrance is comprised of a single-leaf door with a storm door flanked by 5-light sidelights and surmounted by a transom. The house features 2/2, wood, double-hung sash windows with storm windows. There is a hip-roofed dormer on the façade that features paired, 2/2, wood, double-hung sash windows. The roof is hipped clad in asphalt shingles with wide eaves.

- This is a two-story tenant house designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system clad in aluminum siding. The tenant house features 2/2, wood, double-hung sash windows with storm windows. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **730 36th Street**
PROPERTY NAME: House, 730 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1188
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, gable roof with brackets under the roof rakes; battered, wood piers; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light. The house features individual and paired, 1/1, wood, double-hung sash windows. Non-functional shutters flank the façade windows. The roof is Jerkinhead gable clad in asphalt shingles with brackets under the raking cornice. The building features an interior, parged brick chimney on the west elevation. There is a one-story, shed-roofed ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **731 36th Street**
PROPERTY NAME: Duplex, 731 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1985
DHR NUMBER (S): 122-5087-1189
DESCRIPTION (S):
This is a one-story duplex designed in the Modern Movement style and constructed in 1985. It incorporates a concrete foundation and a wood frame structural system clad in brick veneer. There are two, single-leaf, metal doors on the west elevation. The building features 1/1, metal, double-hung sash windows with rowlock brick sills. The roof is side gable clad in asphalt shingles with wide eaves.

NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **735 36th Street**
PROPERTY NAME: House, 735 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1190
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and wood frame structural system. The first story is clad in aluminum siding and asbestos shingles. The second story is clad in wood shingles. The north façade features a two-story, enclosed porch incorporated under a shed roof extending from the main roof. The first story porch is clad in vinyl siding punctuated by 1/1, metal, double-hung sash windows and features battered, wood piers resting on brick pedestals; and a false, asphalt-shingled, hipped roof with exposed, wood rafters under the eaves. The second story porch is clad in vinyl siding punctuated by 1/1, metal, double-hung sash windows and features a metal awning. The primary entrance is comprised of a single-leaf, storm door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. Metal awnings surmount the windows. There is a gable-roofed dormer on the façade that features paired, double-hung sash windows surmounted by a metal awning and exposed, wood rafters under the eaves. The roof is side gable clad in asphalt shingles. The house features an exterior, brick chimney on the west elevation. The chimney has been parged above the roofline and features a corbelled cap. There is a one-story, shed-roofed ell appended to the south elevation.

- This is a one-story carport designed in the Modern Movement style and constructed circa 1970. It features a flat, corrugated metal roof supported by metal posts.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - structure)

PROPERTY ADDRESS: **739 36th Street**
PROPERTY NAME: House, 739 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1191
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and wood frame structural clad in asbestos siding. The north façade features a one-story, screened porch with an asbestos-clad balustrade. The porch features an asphalt-shingled, shed roof and a metal awning. There is a one-story, projecting, squared bay on the east end of the porch that is surmounted by an intersecting gable with exposed wood rafters. The primary entrance is comprised of a single-leaf, wood, paneled door with a light and a storm door. The house features 6/1, wood, double-hung sash windows with storm windows. There is a single-leaf door with a storm door on the east elevation. The roof is gable clad in asphalt shingles with brackets under the rakes and exposed, wood rafters under the eaves. The façade gable features a rectangular-

shaped, metal, louvered vent. The house features a central, interior, brick chimney. There is a one-story, shed-roofed ell appended to the south elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in asbestos siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **740 36th Street**
PROPERTY NAME: Apartment Building, 740 36th Street
OTHER NAME (S): Namer Apartments
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-1192
DESCRIPTION (S):
This is a two-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1921. It incorporates a brick foundation and brick structural system. The south façade features two, two-story, one-bay porches flanking a central entrance block. The porches are sheltered under a common, asphalt-shingled, shed roof with exposed, wood rafters under the eaves. The porches feature brick piers; and replacement, wood balustrades. The porches are accessed by single-leaf, metal, 15-light, doors surmounted by a soldier brick course lintel. The primary entrance is centrally located and is comprised of a single-leaf, metal, 6-paneled door flanked on the east by a one-light, wood-shingled sidelight surmounted by a soldier brick course lintel. The building features 1/1, metal, double-hung sash windows with rowlock brick sills and soldier course brick lintels. The roof is flat with a stepped parapet coped in a rowlock brick course. The building features a corbelled cornice on the facade.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **741 36th Street**
PROPERTY NAME: House, 741 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1193
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features clustered, wood piers resting on an aluminum-clad balustrade and a metal awning. The primary entrance is comprised of a single-leaf, door with a storm door. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. There are one-story, projecting, squared bays on the east and west elevations that are surmounted by shed roofs. The roof is hipped clad in slate shingles.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in asbestos siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **807 36th Street**
PROPERTY NAME: House, 807 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-1194
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1912. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The first story façade is clad in vinyl siding. The north façade features a one-story, two-bay porch incorporated under a shed roof extending from the main roof. The porch features wood, Tuscan columns resting on brick pedestals; a plain, wood balustrade; and a metal awning. The primary entrance is comprised of a single-leaf, metal door surmounted by a multiple light transom and flanked by vinyl-clad sidelights. The house features 1/1, metal, double-hung sash windows. There is a gable-roofed dormer on the east end of the façade that features exposed, wood rafters under the eaves and metal awnings surmounting the windows. There is a shed-roofed dormer on the south elevation. The roof is side gable clad in asphalt shingles. The house features a central, interior, brick chimney with a corbelled cap. There is a one-story, vinyl-clad ell sheltered under a shed roof extending from the main roof on the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **808 36th Street**
PROPERTY NAME: House, 808 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-1195
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1912. It incorporates a brick foundation and a wood frame structural system clad vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; square, wood columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood door with three lights and a storm door surmounted by a multiple light transom. The house features 1/1, metal, double-hung sash windows. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable features a rectangular-shaped, metal, louvered vent. There is a hip-roofed dormer on the west elevation and a shed-roofed dormer on the east elevation. The roof is hipped clad in asphalt shingles with a boxed cornice. The house features interior, parged brick chimneys with corbelled caps on the north elevation and east elevations. There is a two-story, porch incorporated under the main roof on the north elevation.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **809 36th Street**
PROPERTY NAME: Garage, 809 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1949
DHR NUMBER (S): 122-5087-1196
DESCRIPTION (S):
This is a one-story garage designed in the Modern Movement style and constructed in 1949. It incorporates a concrete slab foundation and a wood frame structural system. The façade is clad in vertical board and the side elevations are clad in concrete block. The north façade features three, metal, paneled, roll-up doors. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **810 36th Street**
PROPERTY NAME: House, 810 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-1197
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1912. It incorporates a brick foundation and a wood frame structural system clad vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a dentiled cornice; fluted, square, wood columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable features a one-light, wood, casement window. There are hip-roofed dormers on the east and west elevations. The roof is hipped clad in asphalt shingles with a boxed cornice. The house features an interior, parged brick chimney on the east elevation. There is a two-story, porch incorporated under the main roof on the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **812 36th Street**
PROPERTY NAME: House, 812 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1908
DHR NUMBER (S): 122-5087-1198
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1908. It incorporates a brick foundation and a wood frame structural system clad vinyl siding. The south façade features a one-story, two-

bay porch with an asphalt-shingled, hipped roof; wood, turned posts; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door surmounted by a transom. The house features 1/1, metal, double-hung sash windows. There is a two-story, projecting, squared block on the west end of the façade surmounted by an intersecting, closed gable. The roof is hipped clad in asphalt shingles with a boxed cornice. The house features two interior, parged brick chimneys with corbelled caps on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **815 36th Street**
PROPERTY NAME: House, 815 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1199
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding and wood shingles. The north façade features a one-story, three-bay porch incorporated under a shed roof extending from the main roof. The porch features a rusticated stone foundation; battered, wood piers resting on rusticated stone pedestals; a plain, wood post; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood door with two lights and a wrought iron storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a gable-roofed dormer on the façade that is clad in wood shingles and features tripartite, 1/1, metal, double-hung sash windows; exposed, wood rafters under the eaves; and brackets under the rakes. The roof is side gable clad in asphalt shingles with brackets under the rakes.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **816 36th Street**
PROPERTY NAME: House, 816 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1926
DHR NUMBER (S): 122-5087-1200
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1926. It incorporates a brick foundation and a wood frame structural system. The first story is clad in weatherboard and the second story is clad in wood shingles. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; battered, wood piers resting on brick pedestals; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door. The house features individual, paired, and tripartite, 1/1, metal, double-hung sash windows. There is a hip-roofed dormer on the façade that features paired, 1/1, metal, double-hung sash windows. The roof is hipped clad in asphalt shingles with exposed, wood rafters under the eaves. The house features an exterior, brick chimney with a corbelled cap on the west elevation. There is a one-story, shed-roofed ell appended to the north elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1926. It incorporates a wood frame structural system clad in weatherboard. The garage features a single-leaf, metal, paneled door; and a metal, roll-up door. The roof is hipped clad in asphalt shingles.
- This is a two-story tenant house/garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1930. It incorporates a wood frame structural system. The first story is brick clad partially in vertical board and the second story is clad in asbestos shingles. There are two entrances on the south façade. The entrances are comprised of single-leaf, metal, paneled doors. A gable-roofed overhang supported by wood brackets surmounts the east entrance. There is a metal, paneled, roll-up garage door on the east end of the first story façade. There is a second-story porch that features plain, wood, posts and balustrade. Metal posts on the first story support it. The second story porch is accessed by a single-leaf, wood, 15-light door. The building features paired, 6/1, wood, double-hung sash windows. The roof is hipped clad in asphalt shingles.

CONTRIBUTING (3 - buildings)

PROPERTY ADDRESS: **817 36th Street**
PROPERTY NAME: House, 817 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-1201
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1919. It incorporates a brick foundation and a wood frame structural system clad in Bricktex siding. The north façade features a one-story, two-bay porch incorporated under a shed roof extending from the main roof. The porch features battered, wood piers; and a plain, wood balustrade. There is a false, gable roof extending south on the west elevation. The primary entrance is comprised of a single-leaf door with a storm door. The features house individual and paired, 6/1, wood, double-hung sash windows with storm windows. There is an oversized, gable-roofed dormer on the façade that features exposed, wood rafters under the eaves and brackets under the rakes. The roof is side gable clad in asphalt shingles with brackets under the rakes. The house features an interior, brick chimney on the east elevation. There is a one-story ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **821 36th Street**
PROPERTY NAME: House, 821 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1925
DHR NUMBER (S): 122-5087-1202
DESCRIPTION (S):

This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1925. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; battered, wood piers; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows. The façade gable features a one-light, metal, casement window. The roof is gable clad in asphalt shingles with brackets under the rakes and wide eaves.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **823 36th Street**
PROPERTY NAME: House, 823 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-1203
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1922. It incorporates a brick foundation and a wood frame structural system. The first story is clad in weatherboard and the second story is clad in aluminum siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, shed roof; battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a multiple light transom and flanked by 4-light and one panel sidelights. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. The façade gable features a 6/1, wood, double-hung sash window. The roof is Jerkinhead-gable clad in asphalt shingles with brackets under the rakes and wide eaves.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1930. It incorporates a wood frame structural system clad in vertical board. The garage features double-leaf, wood doors. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **824 36th Street**
PROPERTY NAME: Apartment Building, 824 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1988
DHR NUMBER (S): 122-5087-1204
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1988. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. There is a brick veneer watertable and plinth on the south façade. The south façade features four, centrally located entrances comprised of single-leaf, metal, paneled doors. The second story entrances are accessed by a wood stair appended to the façade. The building features 6/6, metal, double-hung sash windows.

The first story façade windows features rowlock brick sills. The roof is side gable clad in asphalt shingles. The center portion of the roof is taller than the flanking rooflines and features a wide eave on the south elevation that shelters the second story entrances.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **828 36th Street**
PROPERTY NAME: House, 828 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-1205
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1912. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; and wrought iron posts and balustrade. The primary entrance is centrally located and is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a storm door. The house features 2/2, wood, double-hung sash windows with storm windows. The façade gable features a 3-light, wood, casement window. There is a single-leaf door with a storm door on the east elevation. The roof is gable clad in asphalt shingles. The house features a central, interior, brick chimney. There is a one-story, shed-roofed ell appended to the north elevation. There is a one-story, gable-roofed porch appended to the north end of the east elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, roll-up door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **829 36th Street**
PROPERTY NAME: House, 829 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1206
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade is clad in modern wood panels. The north façade features a one-story, two-bay porch incorporated under projecting gabled blocks. The porch features plain, wood posts resting on brick piers and a wrought iron balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a light and a storm door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. The façade gable is closed and features a 1/1, wood, double-hung sash window. The roof is hipped clad in standing-seam metal. There is an interior, brick chimney and a gable-roofed dormer on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **831 36th Street**
PROPERTY NAME: House, 831 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1925
DHR NUMBER (S): 122-5087-1207
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1925. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a two-story, two-bay, enclosed porch incorporated under a shed roof extending from the main roof. The first story porch has been screened in on the east end. The first story porch features a false, asphalt-shingled, shed roof; battered, wood piers resting on brick pedestals; an aluminum-clad balustrade; and a metal, awning. The second story porch is clad in aluminum siding punctuated by 1/1, metal, double-hung sash windows surmounted by metal awnings. The primary entrance is comprised of a single-leaf, wood door with 8-lights and a storm door. The house features 1/1, wood, double-hung sash windows with storm windows surmounted by metal awnings. The roof is side gable clad in asphalt shingles. The house features an interior, brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **836 36th Street**
PROPERTY NAME: Apartment Building, 836 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: circa 1920
DHR NUMBER (S): 122-5087-1208
DESCRIPTION (S):
This is a two-story apartment building designed in the Colonial Revival style and constructed circa 1920. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, one-bay porch with an asphalt-shingled, hipped roof; and battered, wood piers. The primary entrance is centrally located and is comprised of a single-leaf, wood, paneled door with lights. The apartment building features individual and paired; 6/1, wood, double-hung sash windows with storm windows. There is a hip-roofed dormer on the façade that features paired, 6/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles with a boxed cornice. The apartment building features an interior, brick chimney on the east elevation.

- This is a one-and-one-half story garage designed in the Modern Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in asbestos siding. The roof is gable clad in standing-seam metal.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **841 36th Street**

PROPERTY NAME: House, 841 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1998
DHR NUMBER (S): 122-5087-1209
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1998.It is designed to resemble a Queen Anne-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The north façade features a one-story, five-bay porch with an asphalt-shingled, hipped roof; wood, turned posts; and a plain, wood balustrade. The primary entrance is centrally located and is comprised of a single-leaf, metal door with a storm door. The house features 6/6, metal, double-hung sash windows. The façade gable is clad in fishscale-cut, vinyl siding and features cornice returns. The roof is gable clad in asphalt shingles. There is a one-story, shed-roofed ell appended to the south elevation.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **846 36th Street**
PROPERTY NAME: Apartment Building, 846 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1953
DHR NUMBER (S): 122-5087-1210
DESCRIPTION (S):
This is a one-story apartment building designed in the Modern Movement style and constructed in 1953. It incorporates a concrete block foundation and structural system. The building features 2/2, wood, double-hung sash windows with storm windows. The roof is flat clad in asphalt shingles with wide eaves.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **850 36th Street**
PROPERTY NAME: Apartment Building, 850 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1987
DHR NUMBER (S): 122-5087-1211
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1987. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The south façade features four, centrally located entrances comprised of single-leaf, metal, paneled doors with storm doors. The second story entrances are accessed by a wood stair appended to the façade. The building features 6/6, metal, double-hung sash windows flanked by non-functional shutters. The roof is side gable clad in asphalt shingles with wide eaves that shelter the second story entrances.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **856 36th Street**

PROPERTY NAME: House, 856 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1212
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1917. It incorporates a parged brick foundation and a wood frame structural system clad in asbestos siding. The first story façade is clad in brick veneer. The south façade features a two-story, two-bay porch with an asphalt-shingled, hipped roof; plain wood posts; and balustrades. The primary entrance is comprised of a single-leaf, wood door with two lights and a wrought iron storm. The second story porch is accessed by a single-leaf, wood door with storm door. The house features 6/6, metal, double-hung sash windows. There is an intersecting gable on the west end of the façade. There is a one-story, projecting, squared oriel on the first story of the west elevation. There are hip-roofed dormers on the east and west elevations. There is a one-story, shed-roofed ell appended to the north end of the east elevation. There is a single-leaf door with a wrought iron storm door surmounted by an asphalt-shingled, shed roof on the east elevation. The roof is deck on hip clad in asphalt shingles with a wide frieze. The house features an exterior, brick chimney on the east elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1980. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, roll-up door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **857 36th Street**
PROPERTY NAME: Apartment Building, 857 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1972
DHR NUMBER (S): 122-5087-1213
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1972. It incorporates a concrete slab foundation and a wood frame structural system clad in brick veneer. The north façade features two entrances comprised of single-leaf, metal doors with fifteen lights. The building features metal, sliding windows and 1/1, metal, double-hung sash windows. The first story façade windows features rowlock brick sills. The second story façade windows punctuate the Dutch gambrel roof. The gambrel roof is clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **860 36th Street**
PROPERTY NAME: House, 860 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917

DHR NUMBER (S): 122-5087-1214
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in Bricktex siding. The south façade features a one-story porch incorporated under the main roof. The west end of the porch has been screened. The porch features wrought iron posts and balustrade and a Bricktex-clad balustrade on the enclosed portion. The primary entrance is comprised of a single-leaf door with a storm door. The house features 1/1, wood, double-hung sash windows with storm windows. There is an oversized, gable-roofed dormer on the façade that shelters a second story porch. The second story porch features plain, wood posts and a Bricktex-clad balustrade. The roof is side gable clad in asphalt shingles. The house features an interior, brick chimney on the west elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in asbestos siding. The garage features sliding, wood doors. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **861 36th Street**
PROPERTY NAME: Apartment Building, 861 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1967
DHR NUMBER (S): 122-5087-1215
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1967. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in brick veneer. The north façade features a centrally located entrance comprised of a single-leaf, metal, paneled door flanked by sidelights and accessed by brick stairs. The building features 1/1, metal, double-hung sash windows with rowlock brick sills. Air conditioning units punctuate the east and west elevation walls. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **864 36th Street**
PROPERTY NAME: House, 864 36th Street
OTHER NAME (S): Duplex, 864 36th Street
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1216
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in weatherboard. The south façade features a one-story, two-bay porch incorporated under the main roof. The porch features clustered, wood piers resting on weatherboard-clad pedestals; and a weatherboard-clad

balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door flanked on the east by a 10-light sidelight. The house features 1/1, metal, double-hung sash windows. There is an oversized, shed-roofed dormer on the façade that shelters a second story porch. The second story porch features clustered, wood piers resting on weatherboard-clad pedestals. The roof is side gable clad in asphalt shingles with brackets under the rakes and exposed, wood rafters under the eaves. The house features an interior, brick chimney on the west elevation. There is a one-story, incorporated porch with a wood, turned post on the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **865 36th Street**
PROPERTY NAME: House, 865 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-1217
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1915. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; wrought iron posts and balustrade; and a metal awning. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a storm door. The house features 1/1, wood, double-hung sash windows with storm windows. There is a wood, Queen Anne, double-hung sash window on the first story façade. There is a hip-roofed dormer on the façade that is clad in asphalt shingles and features paired, 6/6, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles. The house features a central, interior, parged brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **867 36th Street**
PROPERTY NAME: House, 867 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1218
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, three-bay porch incorporated under the main roof. The porch features square, wood piers and a wood balustrade. The primary entrance is centrally located and is comprised of a single-leaf, wood door with a wrought iron storm door. The house features 1/1, metal, double-hung sash windows. Non-functional shutters flank the facade windows. There is a shed-roofed dormer on the façade that features paired, 12-light, wood, casement windows. The roof is side gable clad in standing-seam metal. The house features a central, interior, parged brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **868 36th Street**
PROPERTY NAME: House, 868 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-1219
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1914. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, two-bay porch incorporated under the main roof. The porch features battered, wood piers and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with 15 lights surmounted by a transom. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. There is a one-story, projecting, squared oriel on the first story of the east elevation that is surmounted by an asphalt-shingle, shed roof. There is a gable-roofed dormer on the façade that features tripartite, 6/1, wood, double-hung sash windows and a metal, louvered vent. The roof is side gable clad in asphalt shingles. The house features an interior, parged brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **869 36th Street**
PROPERTY NAME: House, 869 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-1220
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1912. It incorporates a brick foundation and a brick structural system clad in brick veneer. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a wide frieze; squared, brick columns resting on brick pedestals; and a brick balustrade with open brickwork. The primary entrance is comprised of a single-leaf, metal door with a light surmounted by a transom. The house features 1/1 and 2/2, wood, double-hung sash windows with storm windows. The first story windows feature rowlock brick sills. There is a hip-roofed dormer on the façade that is clad in wood shingles and features a boarded window opening. The roof is hipped clad in slate shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **870 36th Street**
PROPERTY NAME: Store/Dwelling, 870 36th Street
OTHER NAME (S): Apartment Building, 870 36th Street
CONSTRUCTION DATE: 1940
DHR NUMBER (S): 122-5087-1221
DESCRIPTION (S):

This is a two-story store/dwelling designed in the Late 19th and Early 20th Century American Movement style and constructed in 1940. It incorporates a brick foundation and a brick structural system clad in brick veneer. The southwest corner of the first story was the original storefront, which has been partially bricked and features a screened porch. The porch features a single-leaf, wood, screen door. There is a single-leaf, metal, paneled door with a storm door on the north end of the west elevation. The building features individual and paired, 1/1, wood, double-hung sash windows with storm windows and rowlock brick sills. Two-course, header brick, jack arches surmount the windows. The roof is flat with a parapet coped in metal. There is a corbelled cornice on the south façade. There is a two-story, shed-roofed porch appended to the north elevation. The building has been converted to function solely as an apartment building.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **871 36th Street**
PROPERTY NAME: House, 871 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-1222
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; a wide frieze; wood, Tuscan columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a boarded transom. The house features 1/1, wood, double-hung sash windows with storm windows. The façade gable is closed and features a 1/1, wood, double-hung sash window. There is a two-story, projecting, squared bay on the west elevation that is surmounted by an intersecting, closed gable. The roof is gable clad in slate shingles. The house features an interior, brick chimney with a corbelled cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1007 36th Street**
PROPERTY NAME: Apartment Building, 1007 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1971
DHR NUMBER (S): 122-5087-1223
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1971. It incorporates a concrete block foundation and wood frame structural system clad in brick veneer. The primary entrance is centrally located on the west elevation. The primary entrance is comprised of a single-leaf door that is accessed by brick stairs. The building features 6/6, wood, double-hung sash windows with storm windows and rowlock brick sills. The north façade features metal, sliding windows with rowlock brick sills. The roof is gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1010 36th Street**
PROPERTY NAME: House, 1010 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1224
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, two-bay porch incorporated under the main roof. The porch features clustered, wood piers resting on asbestos-clad pedestals; and an asbestos-clad balustrade. The primary entrance is comprised of a single-leaf door with a storm door. The house features 1/1, wood, double-hung sash windows with storm windows. There is an oversized, shed-roofed dormer on the façade that shelters a second story porch. The second story porch features clustered, wood piers resting on asbestos-clad pedestals; and an asbestos-clad balustrade. The second story porch is accessed by a sliding, glass door. The roof is side gable clad in asphalt shingles. The house features an interior, parged brick chimney on the west elevation. There is a one-story, vinyl-clad ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1011 36th Street**
PROPERTY NAME: House, 1011 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1225
DESCRIPTION (S):
This is a one-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a centrally located entrance comprised of a single-leaf, wood, paneled door with a storm door surmounted by a metal awning and accessed by brick stairs with a wrought iron balustrade. The house features 1/1, wood, double-hung sash windows with storm windows. The façade gable features a boarded window opening. The roof is gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1012 36th Street**
PROPERTY NAME: Apartment Building, 1012 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1986
DHR NUMBER (S): 122-5087-1226
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1986. It

incorporates a concrete block foundation clad in brick veneer and a wood frame structural system. The south façade is clad in brick veneer and the side elevations are clad in vinyl siding. The south façade features three centrally located entrances comprised of a single-leaf, metal, paneled doors surmounted by a common, asphalt-shingled, gable roof supported by wood, turned posts. The house features paired, 1/1, metal, double-hung sash windows with rowlock brick sills. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1013 36th Street**
PROPERTY NAME: House, 1013 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1227
DESCRIPTION (S):
This is a one-story house designed in the Colonial Revival style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a centrally located entrance comprised of a single-leaf door with a storm door surmounted by an asphalt-shingled, gable roof. The north facade features a one-story, three-bay porch incorporated under the main roof. The porch features battered, wood piers resting on a vinyl-clad balustrade and it has been enclosed with 6/1, wood, double-hung sash windows. The façade gable features a rectangular-shaped, metal, louvered vent. The house features 6/1, wood, double-hung sash windows. The roof is gable clad in asphalt shingles. The house features an interior, brick chimney with a corbelled cap on the east elevation. There is a one-story, shed-roofed addition appended to the west elevation. The addition features a 12-light, wood, fixed window.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in asbestos siding. The garage features a wood, paneled door with 4-light fixed windows. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **1017 36th Street**
PROPERTY NAME: House, 1017 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-1228
DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1919. It incorporates a brick foundation and a wood frame structural system clad in weatherboard. The north façade features a one-story, three-bay porch incorporated under the main roof. The porch features plain, wood posts and a wood balustrade with a sunburst motif. The primary entrance is centrally located and is comprised of a single-leaf, metal, paneled door. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. There is a gable-roofed dormer on the façade that features a tripartite window. The central window is stained glass, the

east window is boarded and the west window 6-light, wood and casement. The dormer features exposed, wood rafters under the eaves. The roof is side gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1021 36th Street**
PROPERTY NAME: House, 1021 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1953
DHR NUMBER (S): 122-5087-1229
DESCRIPTION (S):
This is a one-story house designed in the Colonial Revival style and constructed in 1953. It incorporates a concrete block foundation and a wood frame structural system clad in asbestos siding. The north façade features a centrally located entrance comprised of a single-leaf, wood, paneled door with lights and a storm door surmounted by an asphalt-shingled, gable roof supported by wood brackets. The north façade features a concrete block stoop with a wrought iron balustrade to the east of the primary entrance. The house features 6/6, wood, double-hung sash windows with storm windows. The roof is gable clad in asphalt shingles. The house features a central, interior, brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1028 36th Street**
PROPERTY NAME: House, 1028 36th Street
OTHER NAME (S): Duplex, 1028 36th Street
CONSTRUCTION DATE: 1927
DHR NUMBER (S): 122-5087-1230
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1927. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The south façade features one-story, projecting, squared bay on the east end that is surmounted by a gable roof with exposed, bracketed, outriggers and exposed, wood rafters. The primary entrance is comprised of a single-leaf, metal, paneled door. There is a wood, ramp appended to the north façade. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is gable clad in asphalt shingles with exposed, bracketed outriggers and exposed, wood rafters.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1030 36th Street**
PROPERTY NAME: House, 1030 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1927
DHR NUMBER (S): 122-5087-1231
DESCRIPTION (S):

This is a one-and-one-half-story Bungalow constructed in 1927. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch incorporated under the main roof. The porch features battered, wood piers resting on brick pedestals and a plain, wood balustrade. The primary entrance is centrally located and is comprised of a single-leaf door with a storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a gable-roofed dormer on the façade that features a tripartite, 1/1, wood, double-hung sash window and exposed, wood rafters under the eaves. The roof is side gable clad in asphalt shingles. There is a single-leaf door with a storm door on the west elevation. This entrance is accessed by wood stairs appended to the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1031 36th Street**
PROPERTY NAME: House, 1031 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1232
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, turned posts; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with lights and a storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles. There is a one-story ell appended to the south elevation. There is a single-leaf door with a storm door on the east elevation of the ell. The entrance is accessed by brick stairs with a plain, wood balustrade.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1980. It incorporates a wood frame structural system clad in vinyl siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1033 36th Street**
PROPERTY NAME: House, 1033 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1233
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; and wood, turned posts. The primary entrance is comprised of a single-leaf, wood, 4-panel door with four lights. The house features individual and paired, 1/1, wood, double-

hung sash windows with storm windows. The roof is hipped clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1034 36th Street**
PROPERTY NAME: House, 1034 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1234
DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, gable roof and wrought iron posts and balustrade. The primary entrance is comprised of a single-leaf door with a storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the facade windows. There is a gable-roofed dormer on the façade that features paired, 6/6, wood, double-hung sash flanked by non-functional shutters. The roof is side gable clad in asphalt shingles. There is one-story, shed-roofed ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1035 36th Street**
PROPERTY NAME: House, 1035 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1235
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, turned posts; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal door. The house features individual and paired, 1/1, metal, double-hung sash windows. The roof is hipped clad in asphalt shingles with a wide frieze. There is a one-story, shed-roofed ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1036 36th Street**
PROPERTY NAME: House, 1036 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-1236
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1922. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, one-

bay porch with an asphalt-shingled, hipped roof with brackets under the rakes and wrought iron posts and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door. The house features individual and paired, 6/6, metal, double-hung sash windows. There is a gable-roofed dormer on the east elevation. The roof is gable clad in asphalt shingles with brackets under the rakes.

- This is a one-story garage designed in the Colonial Revival style and constructed circa 1925. It incorporates a wood frame structural system clad in asbestos siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **1038 36th Street**
PROPERTY NAME: House, 1038 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1237
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, gable roof with brackets under the rakes and wrought iron posts and balustrade. The primary entrance is comprised of a single-leaf, wood door with lights and a wrought iron storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a gable-roofed dormer on the facade that features paired, 1/1, wood, double-hung sash windows. The roof is side gable clad in asphalt shingles with brackets under the rakes.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1040 36th Street**
PROPERTY NAME: House, 1040 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1923
DHR NUMBER (S): 122-5087-1238
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1923. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The south façade features a one-story, enclosed porch with an asphalt-shingled, gable roof with brackets under the rakes; a wood-shingled balustrade; and 1/1, wood, double-hung sash windows. The primary entrance is centrally located and is comprised of a single-leaf, wood door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a shed-roofed dormer on the façade. The roof is side gable clad in asphalt shingles with brackets under the rakes. There is a one-story ell appended to the north elevation.

- This is a one-story garage designed in the Colonial Revival style and constructed circa 1925. It incorporates a wood frame structural system clad in wood shingles. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **1048 36th Street**
PROPERTY NAME: House, 1048 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1955
DHR NUMBER (S): 122-5087-1240
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1955. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, one-bay porch with a metal awning roof; and wrought iron posts and balustrade. The primary entrance is comprised of a single-leaf, wood door with a wrought iron storm door. The house features 1/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles. The house features a central, interior, brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1052 36th Street**
PROPERTY NAME: House, 1052 36th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1955
DHR NUMBER (S): 122-5087-1241
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1955. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, one-bay porch with an asphalt-shingled, flat roof extending from the main roof and wrought iron posts and balustrade. There is an intersecting gable surmounting the centrally located porch entrance. The primary entrance is centrally located and is comprised of a single-leaf, wood door with six lights and a multiple light storm door. The house features 1/1, metal, double-hung sash window. The roof is side gable clad in asphalt shingles. The house features a central, interior, brick chimney. There is a one-story ell appended to the north elevation.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1955. It incorporates a wood frame structural system clad in vinyl siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

37th Street

PROPERTY ADDRESS: **108 37th Street**
PROPERTY NAME: House, 108 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1987
DHR NUMBER (S): 122-5087-1242
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1987. It is designed to resemble a Colonial Revival-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, shed roof; a metal awning; and plain, wood posts and balustrade. A pediment surmounts the porch entrance. The primary entrance is comprised of a single-leaf, metal door. The house features 1/6 and 6/1, metal, double-hung sash windows. The roof is gable clad in asphalt shingles. There is a one-story ell appended to the north elevation.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **110 37th Street**
PROPERTY NAME: House, 110 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1243
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1917. It incorporates a parged brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, shed roof; parged piers; and a plain, wood balustrade. The primary entrance has been boarded. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. There is a single-leaf door on the east elevation. The roof is hipped clad in asphalt shingles with wide eaves. There is a one-story ell appended to the north elevation. The house features an exterior brick chimney on the west elevation that has been parged above the roofline.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **111 37th Street**
PROPERTY NAME: House, 111 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1940
DHR NUMBER (S): 122-5087-1244
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1940. It incorporates a brick foundation and a wood frame structural system. The first story is clad in brick veneer and the second story

is clad in asbestos siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The house features multiple light, quarter circle, wood windows at the roof apexes of the east and west elevations. The roof is side gable clad in asphalt shingles. The house features an exterior, brick chimney on the west elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1945. It incorporates a brick structural system. The east façade features five, double-leaf, wood doors. The shed roof is clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **112 37th Street**
PROPERTY NAME: House, 112 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1245
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, gabled roof; battered, wood piers; and a balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The facade gable features a 6/6, wood, double-hung sash window. The roof is gable clad in asphalt shingles. The house features an exterior, brick chimney on the east elevation that is parged above the roofline.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **114 37th Street**
PROPERTY NAME: House, 114 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1246
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1918. It incorporates a parged brick foundation and a wood frame structural system. The first story is clad in vinyl siding and the second story is clad in wood shingles. The south façade features a one-story, two-bay porch with an asphalt-shingled, shed roof; battered, wood piers resting on parged brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles. The house features an exterior, brick chimney on the west elevation that has been parged above the roofline. There is a one-story ell appended to the north elevation.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **200 37th Street**
PROPERTY NAME: House, 200 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1986
DHR NUMBER (S): 122-5087-1247
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1986. It incorporates a parged concrete block foundation and a wood frame structural system. The south façade is clad in brick veneer and the east and west elevations are clad in vinyl siding. The primary entrance is comprised of a single-leaf, metal door with an oval light and a storm door surmounted by a broken pediment and accessed by brick stairs with a vinyl balustrade. The house features 1/1, metal, double-hung sash windows. Non-functional shutters flank the façade windows. There is a one-story, projecting, canted bay on the east end of the first story façade that is surmounted by an asphalt-shingled, hipped roof. The house features an octagonal-shaped window on the east elevation. The roof is gable clad in asphalt shingles. There is a one-story, shed-roofed ell appended to the north elevation.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **206 37th Street**
PROPERTY NAME: House, 206 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1248
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a two-story porch incorporated under the main roof. The first story porch has two bays and features a boxed cornice; square, wood columns; and a plain, wood balustrade. The second story porch has been enclosed and features a vinyl-clad balustrade and 1/1, metal, double-hung sash windows. The primary entrance is comprised of a single-leaf, metal door with an oval light and a storm door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. There is a single-leaf door accessed by wood stairs on the east elevation. The roof is side gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **207 37th Street**
PROPERTY NAME: House, 207 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1998
DHR NUMBER (S): 122-5087-1249

DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1998. It is designed to resemble a Queen Anne-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal door with a storm door flanked on the east by a sidelight. There is a two-story, projecting, canted bay surmounted by a closed gable on the east end of the façade. The closed gable is clad in fishscale-cut, vinyl siding. The house features 1/1, metal, double-hung sash windows. The house features a diamond-shaped window on the west elevation. The roof is gable clad in asphalt shingles. The façade gable is closed.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1998. It incorporates a wood frame structural system clad in vinyl siding. The roof is gable clad in asphalt shingles.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **208 37th Street**
PROPERTY NAME: House, 208 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-1250
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a 7-course, American bond brick structural system. The south façade is clad in common bond brick veneer. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and turned balusters. The primary entrance is comprised of a single-leaf door with a wrought iron storm door surmounted by a transom. The house features 1/1, vinyl, double-hung sash windows with rowlock brick sills. Two-course, brick jack arches surmount the windows. There is an intersecting, closed gable on the east end of the façade. The closed gable is clad in fishscale-cut, wood shingles and features a rectangular, wood, louvered vent. The roof is hipped clad in asphalt shingles. There is a one-story, vinyl-clad ell appended to the north elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system clad in vinyl siding. The roof is side gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **210 37th Street**
PROPERTY NAME: House, 210 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-1251

DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a 7-course, American bond brick structural system. The south façade is clad in common bond brick veneer. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and turned balusters. The primary entrance is comprised of a single-leaf, metal door with an oval light surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows and rusticated limestone sills. Two-course, brick jack arches surmount the windows. There is an intersecting, closed gable on the east end of the façade. The closed gable is clad in fishscale-cut, wood shingles and features a Queen Anne, wood, double-hung sash window. The roof is hipped clad in slate shingles. The house features an interior, brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **216 37th Street**
PROPERTY NAME: Apartment Building, 216 37th Street
OTHER NAME (S): Chartreuve Apartments
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-1252
DESCRIPTION (S):
This is a three-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1922. It incorporates a brick foundation and a 7-course, American bond brick structural system. The south façade is clad in common bond brick veneer. The south façade features two, three-story, one-bay porches flanking a centrally located, projecting, three-story, brick entrance block. The porches and entrance are sheltered by a common, asphalt-shingled, hipped roof with wide eaves. The porches feature three-story brick piers and plain, wood balustrades. The porches are accessed by single-leaf, wood, 15-light doors. The primary entrance is comprised of a single-leaf, metal door flanked by boarded sidelights. There are 1/1, wood, double-hung sash windows with rowlock brick sills on the second and third stories of the façade entrance block. The building features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The roof is flat with a parapet and a corbelled cornice on the facade. The parapet is stepped on the side elevations and is coped in a rowlock brick course.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **219 37th Street**
PROPERTY NAME: House, 219 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1253
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features clustered, wood piers resting on brick

pedestals; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light. The house features 1/1, vinyl, double-hung sash windows with storm windows. There is a gable-roofed dormer on the facade that features a tripartite, 1/1, vinyl, double-hung sash window; a plain, wood balustrade; a rectangular, wood, Queen Anne, casement window at the roof apex; and exposed, wood rafters under the eaves. There is a single-leaf door surmounted by a metal awning on the west elevation. The roof is side gable clad in asphalt shingles with brackets under the rakes. The house features an exterior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **220 37th Street**
PROPERTY NAME: House, 220 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1254
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system. The first story has been parged and the second story is clad in wood shingles. The south façade features a one-story, one-bay porch with an asphalt-shingled, shed roof; battered, wood piers resting on parged brick pedestals; and a parged balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with eight lights. The house features 1/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows. There are intersecting gables on the east and west elevations. The roof is gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **222 37th Street**
PROPERTY NAME: House, 222 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1924
DHR NUMBER (S): 122-5087-1255
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1924. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story porch with an asphalt-shingled, hipped roof; battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The west end of the porch has been enclosed with aluminum siding. The primary entrance is comprised of a single-leaf, metal door with a storm door. The house features 6/1, wood, double-hung sash windows with storm windows. There is an intersecting gable on the east end of the facade. The façade gable features a rectangular, louvered vent. The roof is gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **223, 225 & 227 37th Street**

PROPERTY NAME: Multiple Family Dwelling, 223, 225 & 227 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1985
DHR NUMBER (S): 122-5087-1256
DESCRIPTION (S):
This is a two-story multiple family dwelling designed in the Modern Movement style and constructed in 1985. This building is comprised of three adjacent units marked by a recessed wall between the units. It incorporates a concrete slab foundation and a wood frame structural system. The north façade is clad in common bond brick veneer and the east and west elevations are clad in vinyl siding. The north façade features a three, one-story, one-bay porches with asphalt-shingled, hipped roofs; and wood, turned posts. The primary entrances are comprised of single-leaf, metal doors. The east unit has a wrought iron storm door and the central unit has a metal storm door. The dwelling features individual and paired, 6/6, metal, double-hung sash windows. The façade windows feature rowlock brick sills. There is a centrally located, intersecting gable on the façade that is clad in vinyl siding and flanked by smaller gables. The roof is hipped clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **229, 231 & 233 37th Street**
PROPERTY NAME: Multiple Family Dwelling, 229, 231 & 233 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1985
DHR NUMBER (S): 122-5087-1259
DESCRIPTION (S):
This is a two-story multiple family dwelling designed in the Modern Movement style and constructed in 1985. This building is comprised of three adjacent units. It incorporates a concrete slab foundation and a wood frame structural system. The north façade is clad in common bond brick veneer and the east and west elevations are clad in vinyl siding. The north façade features three, one-story, one-bay porches with asphalt-shingled, hipped roofs; and plain and turned, wood posts. The primary entrances are comprised of single-leaf, metal doors with storm doors. The dwelling features 9/9 and 6/6, metal, double-hung sash windows. The façade windows feature rowlock brick sills. There is a two-story, projecting, canted bay on the central part of the façade that is surmounted by an intersecting gable. The intersecting gable clad in vinyl siding and features a rectangular, metal, louvered vent. Another intersecting gable is located at the west corner of the north façade. The roof is hipped with wide eaves clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **230 37th Street**
PROPERTY NAME: House, 230 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1952
DHR NUMBER (S): 122-5087-1260
DESCRIPTION (S):

This is a one-story house designed in the Modern Movement style and constructed in 1952. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, one-bay porch with an asphalt-shingled, gable roof; and wrought iron posts. The primary entrance is comprised of a single-leaf, metal door with a storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a tripartite window of a fixed, wood window flanked by 1/1, wood, double-hung sash windows on the façade. Metal awnings surmount the windows. The roof is side gable clad in asphalt shingles. There is a one-story ell appended to the north elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1952. It incorporates a wood frame structural system clad in asbestos siding. The garage features a metal, paneled, roll-up door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **234 37th Street**
PROPERTY NAME: House, 234 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1952
DHR NUMBER (S): 122-5087-1263
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1952. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, one-bay porch with an asphalt-shingled, flat roof extending from the main roof; clustered, wood posts; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a tripartite window of a fixed, wood window flanked by 1/1, wood, double-hung sash windows on the façade. Non-functional shutters flank the facade windows. The roof is side gable clad in asphalt shingles. There is a one-story ell appended to the north elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1952. It incorporates a wood frame structural system clad in asbestos siding. The garage features a metal, paneled, roll-up door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **235, 237 & 239 37th Street**
PROPERTY NAME: Multiple Family Dwelling, 235, 237 & 239 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1985
DHR NUMBER (S): 122-5087-1264
DESCRIPTION (S):
This is a two-story multiple family dwelling designed in the Modern Movement style and constructed in 1985. This building is comprised of three adjacent units marked by a recessed wall between the units. It incorporates a

concrete slab foundation and a wood frame structural system. The north façade is clad in common bond brick veneer and the east and west elevations are clad in vinyl siding. The north façade features three, one-story, one-bay porches with asphalt-shingled, hipped roofs and wood, turned posts. The east unit porch features a wood, lattice balustrade and the west unit porch features a wood slat balustrade. The primary entrances are comprised of single-leaf, metal doors with storm doors. The dwelling features individual and paired, 6/6 and 9/9, metal, double-hung sash windows. The façade windows feature rowlock brick sills. There is an intersecting gable on the façade at the east and west corners with a smaller gable in the center. The gables are clad in vinyl siding and the east and west gables features rectangular, metal louvered vents. The roof is hipped clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **238 37th Street**
PROPERTY NAME: House, 238 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1952
DHR NUMBER (S): 122-5087-1266
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1952. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, one-bay porch with an asphalt-shingled, gable roof and wrought iron posts and balustrade. The primary entrance is comprised of a single-leaf, metal door with a storm door. The house features individual and paired, 2/2, wood, double-hung sash windows with storm windows. There is a tripartite window of a fixed, wood window flanked by 2/2, wood, double-hung sash windows on the façade. The roof is side gable clad in asphalt shingles. There is a one-story, gable-roofed porch appended to the north elevation. The porch features a metal awning; metal posts; and a plain, wood balustrade. The porch features a single-leaf, metal door with a storm door. The house features an interior, brick chimney on the north elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1952. It incorporates a wood frame structural system clad in asbestos siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **300 37th Street**
PROPERTY NAME: House, 300 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1933
DHR NUMBER (S): 122-5087-1268
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1933. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south facade features a centrally located, one-story, projecting, squared entrance bay. The entrance bay is clad in brick veneer and features an asphalt-shingled, gable roof. The primary entrance is

comprised of a single-leaf door surmounted by a fan-shaped transom and framed by a rusticated stone, round arch door surround. The house features individual and paired, 3/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, squared block that intersects the main house on the southeast corner. The roof is side gable clad in asphalt shingles. The house features an exterior, brick and rusticated stone chimney with a corbelled cap centrally located on the façade. There is an interior, brick chimney on the north elevation.

- This is a one-story, two-car garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1935. It incorporates a wood frame structural system clad in wood shingles. The garage features two, wood, paneled, roll-up doors with four lights. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **304 37th Street**
PROPERTY NAME: House, 304 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1932
DHR NUMBER (S): 122-5087-1269
DESCRIPTION (S):
This is a one-and-one-half story Bungalow constructed in 1932. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The house features a one-story, one-bay porch incorporated under the main roof on the southeast corner. The porch features a square, wood columns and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a storm door. The house features individual, paired and tripartite, 6/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows. The roof is gable clad in asphalt shingles. The house features an exterior, brick chimney with a corbelled cap on the west elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1935. It incorporates a wood frame structural system clad in vinyl siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **307 37th Street**
PROPERTY NAME: Church, 307 37th Street
OTHER NAME (S): Memorial Spiritualist Church
CONSTRUCTION DATE: 1949
DHR NUMBER (S): 122-5087-0108 122-0932
DESCRIPTION (S):
This is a one-story church designed in the Modern Movement style and constructed in 1949. It incorporates a concrete block foundation and structural system. The church has been parged and features buttresses on the east and west elevations. The north façade features centrally located, double-leaf, wood doors flanked by

polychrome, brick quoins. A wood, stained glass window and a rounded-arch, wood, stained glass window surmounts the entrance. The church features wood, stained glass windows with storm windows and rowlock brick sills on the side elevations. The church features a metal steeple resting on a vinyl-clad base. The roof is gable clad in asphalt shingles with parapet on the facade.

- This is a two-story secondary school designed in the Modern Movement style and constructed circa 1950. It incorporates a concrete block foundation and structural system that has been parged. There are two entrances on the north façade that are comprised of single-leaf doors with storm door surmounted by gabled-roofed overhangs. The church school features individual and paired, 1/1, vinyl, double-hung sash windows with rowlock brick sills. The roof is flat with a crenellated parapet coped in metal.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **308 37th Street**
PROPERTY NAME: House, 308 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1935
DHR NUMBER (S): 122-5087-1270
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Late 19th and early 20th Century American Movement style and constructed in 1935. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The house features a one-story, two-bay porch incorporated under the main roof on the southeast corner. The porch features battered, wood piers resting on brick pedestals and a plain, wood, balustrade. The primary entrance is comprised of a single-leaf door with a storm door. The house features individual and paired, 6/6, metal, double-hung sash windows. Non-functional shutters flank the façade windows. The house features two, large, gable-roofed dormers on the façade. The dormers feature tripartite, 6/6, metal, double-hung sash windows flanked by non-functional shutters and surmounted by applied wood cornices broken by wood-carved, fan-shaped panels. The roof is side gable clad in asphalt shingles with wide eaves. The house features an exterior, brick chimney on the west elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1945. It incorporates a wood frame structural system clad in asbestos siding. The garage features a metal, roll-up door; and a single-leaf, wood door on the south façade. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **311 37th Street**
PROPERTY NAME: House, 311 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1949
DHR NUMBER (S): 122-5087-1271
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Modern Movement style with a Cape Cod form and

constructed in 1949. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, one-bay porch with a metal awning roof and wrought iron posts and balustrade. The primary entrance is comprised of a single-leaf, metal door with a multiple-light storm door. The house features individual and paired, 6/6, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows. There are two, gable-roofed dormers on the façade that features 6/6, wood, double-hung sash windows. The roof is side gable clad in asphalt shingles. The house features a central, interior, brick chimney.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system clad in asbestos siding. The garage features a wood, paneled roll-up door with twelve lights and a single-leaf, wood door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **316 37th Street**
PROPERTY NAME: House, 316 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1948
DHR NUMBER (S): 122-5087-1272
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1948. It incorporates a concrete block foundation and a wood frame structural system clad in asbestos siding. The house features a one-story, one-bay porch with an asphalt-shingled, gable roof; square, wood posts; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door. The house features individual and paired, 6/6, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles. The house features one-story, gable-roofed ell appended to the east elevation. There is also a one-story, shed-roofed ell appended to the north elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system clad in asbestos siding. The garage features a metal, roll-up door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **320 37th Street**
PROPERTY NAME: House, 320 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1948
DHR NUMBER (S): 122-5087-1273
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1948. It incorporates a concrete block foundation and a wood frame structural system clad in asbestos siding. The south facade features

a centrally located, one-story, one-bay porch incorporated under a shed roof extending from the main roof. The porch features plain, wood posts and a metal awning. The primary entrance is centrally located and is comprised of a single-leaf door with a wrought iron storm door. The house features individual and paired, 6/6, wood, double-hung sash windows with storm windows surmounted by metal awnings. Non-functional shutters flank the façade windows. The roof is side gable clad in asphalt shingles. The house features one-story, gable-roofed ell appended to the east elevation. There is also a one-story ell appended to the north elevation. The house features an interior, brick chimney on the north elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1945. It incorporates a wood frame structural system clad in asbestos siding. The garage features a wood, paneled, roll-up door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **325 37th Street**
PROPERTY NAME: Duplex, 325 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1953
DHR NUMBER (S): 122-5087-1274
DESCRIPTION (S):
This is a one-story duplex designed in the Modern Movement style and constructed in 1953. It incorporates a brick foundation and a wood frame structural system clad in brick veneer. The north façade features a one-story, projecting, entrance block with an intersecting, hipped roof and a single-leaf door with a wrought iron storm door surmounted by a metal awning. There is a single-leaf, door with a wrought iron storm door surmounted by a metal awning on the west elevation. The house features 4-light, metal, casement windows. There is a fixed, metal, 15-light window on the façade. There is a single-leaf door accessed by wood stairs on the east elevation. The roof is hipped clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **326 37th Street**
PROPERTY NAME: House, 326 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1948
DHR NUMBER (S): 122-5087-1275
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1948. It has a Cape Cod form. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The primary entrance is centrally located and is comprised of a single-leaf door with a wrought iron storm door surmounted by a metal awning. The house features 1/1, metal, double-hung sash windows. Non-functional shutters flank the first story façade windows. There are two, gable-roofed dormers on the façade. The roof is side gable clad in asphalt shingles. The house features one-story, gable-roofed addition appended to the east elevation. There is a one-story, gable-roofed garage appended to the west elevation by a side gable-roofed hyphen. The hyphen

features a single-leaf, wood door with six lights and a wrought storm door accessed by brick stairs with a wrought iron balustrade. The garage features a metal, paneled, roll-up door. There is an interior, brick chimney on the north elevation of the hyphen. The house features an exterior, brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **400 37th Street**
PROPERTY NAME: House, 400 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1948
DHR NUMBER (S): 122-5087-1276
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1948. It has a Cape Cod form. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, one-bay porch with an asphalt-shingled, gable roof and plain, wood posts and balustrade. The primary entrance is centrally located and is comprised of a single-leaf, metal, paneled door with a storm door. The house features individual and paired, 6/6, metal, double-hung sash windows. Non-functional shutters flank the first story façade windows. There are two, gable-roofed dormers on the façade that feature 6/6, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles. The house features a central interior, brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **401 37th Street**
PROPERTY NAME: House, 401 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1948
DHR NUMBER (S): 122-5087-1277
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1948. It incorporates a parged brick foundation and a wood frame structural system clad in vinyl siding. The house occupies a U-shaped footprint on the property. The north façade features a centrally located, one-story, one-bay porch with an asphalt-shingled, gable roof and wrought iron posts and balustrade. The primary entrance is centrally located and is comprised of a single-leaf, metal door with a storm door. There are two, projecting, gable-roofed blocks on the east and west ends of the façade. The blocks feature metal awnings surmounting the windows and rectangular, metal, louvered vents at the roof apexes. The house features individual and paired, 1/1, metal, double-hung sash windows. The roof is hipped clad in asphalt shingles. The house features a central, interior, brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **404 37th Street**
PROPERTY NAME: House, 404 37th Street

OTHER NAME (S):
CONSTRUCTION DATE: 1948
DHR NUMBER (S): 122-5087-1278
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Modern Movement style and constructed in 1948. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The house features a one-story, one-bay porch incorporated under a shed roof extending from the main roof on the southeast corner. The porch features a metal awning and wrought iron posts and balustrade. The primary entrance is centrally located and is comprised of a single-leaf door with a storm door. The house features individual and paired, 1/1, metal, double-hung sash windows. Non-functional shutters flank the façade windows. There is a one-story, projecting, squared block on the west end of the south elevation that is surmounted by an intersecting gable. The roof is side gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **411 37th Street**
PROPERTY NAME: House, 411 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1941
DHR NUMBER (S): 122-5087-1279
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1941. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north facade features a one-story, one-bay porch with an asphalt-shingled, gable roof; a metal awning; and clustered, wood posts with wood lattice infill. The primary entrance is comprised of a single-leaf door. The house features 6/1 and 6/6, wood, double-hung sash windows. Non-functional shutters flank the façade windows and metal awnings surmount some of the façade and side elevation windows. There is an intersecting, gable-roofed block on the west end of the façade. The roof is cross-gable clad in asphalt shingles. The house features an interior, brick chimney on the south elevation. There is a two-story addition appended to the southeast corner of the house. The addition incorporates a brick foundation and a wood frame structural system clad in aluminum siding. It features a one-bay porch incorporated under the main building on the northwest corner. The porch features brick piers. The addition features 6/6, wood, double-hung sash windows flanked by non-functional shutters. The roof is gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **412 37th Street**
PROPERTY NAME: House, 412 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-1280
DESCRIPTION (S):

This is a two-story house designed in the Craftsman style and constructed in 1919. It incorporates a stuccoed brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, shed roof; battered and clustered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a fan-shaped light and storm door flanked by non-functional shutters. The house features individual and paired, 6/1, metal, double-hung sash windows. Non-functional shutters flank the façade windows. The roof is side gable clad in composite tiles. There is a one-story, shed-roofed ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **415 37th Street**
PROPERTY NAME: House, 415 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1940
DHR NUMBER (S): 122-5087-1281
DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1940. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, one-bay porch with an asbestos-shingled, hipped roof; a metal awning; battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is centrally located and is comprised of a single-leaf, wood door with six lights and a storm door. The house features 6/1, wood double-hung sash windows with storm windows. Metal awnings surmount some of the windows. The façade gable features a 6/1, wood, double-hung sash window. There is a gable-roofed dormer on the west elevation that features a 6/1, wood, double-hung sash window and exposed, wood rafters under the eaves. The roof is gable clad in asbestos shingles. The house features an exterior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **416 37th Street**
PROPERTY NAME: House, 416 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1282
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a two-story porch with an asphalt-shingled shed roof. The first story porch has been partially enclosed with vinyl siding on the west end and features a vinyl-clad pier on the east end. The first story porch is surmounted by a false, composite-tiled, hipped roof. The second story porch has been enclosed with vinyl siding punctuated by paired, 1/1, metal, double-hung sash windows. The primary entrance is comprised of a single-leaf, door with a storm door surmounted by a transom. The house features individual and paired, 1/1, metal, double-hung sash windows. There are two, one-story, projecting, squared

bays on the first story of the west elevation that are surmounted by composite-tiled, shed roofs. There is a one-story, projecting oriel located between the first and second stories on the east elevation. The oriel features a single-leaf door accessed by wood stairs appended to the east elevation. There is a shed-roofed dormer on the façade. The roof is side gable clad in asphalt shingles with brackets under the rakes. The house features a central, interior, parged brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **420 37th Street**
PROPERTY NAME: House, 420 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1283
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, gable roof; a metal awning; battered, wood piers; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf, wood door with a diamond-shaped light and storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a single-leaf door on the west elevation between the first and second stories. The door is surmounted by a metal awning and accessed by wood stairs. There is a gable-roofed dormer on the west elevation. The roof is gable clad in asphalt shingles with wide eaves. The house features an exterior, brick chimney with a corbelled cap the east elevation. The chimney has been parged above the roofline.

- This is a one-story garage designed in the Colonial Revival style and constructed circa 1920. It incorporates a wood frame structural system clad in vinyl siding. The garage features double-leaf, wood doors with eight lights. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **422 37th Street**
PROPERTY NAME: House, 422 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1284
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system. The first story is clad in brick veneer and the second story is clad in aluminum siding. The south façade features a two-story porch with an asphalt-shingled, hipped roof. The first story porch features a wide frieze; battered, wood piers resting on brick pedestals; and plain, wood balustrade. The second story porch had been enclosed with aluminum siding punctuated by paired and tripartite, 6/1, wood, double-hung sash windows. The primary entrance is comprised of a single-leaf, wood door with a light and wrought iron storm door flanked by wood-paneled, 4-light sidelights. The house features individual

and paired, 6/1 and 12/1, wood, double-hung sash windows with storm windows. The first story windows features limestone sills and 2-course, header brick, round arch lintels. The roof is hipped clad in asphalt shingles with wide eaves. The house features an interior, parged brick chimney with a corbelled cap on the east elevation. There is a one-story, aluminum-clad ell appended to the north elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in weatherboard. The garage features double-leaf, wood doors. The roof is hipped clad in asphalt shingles with exposed, wood rafters.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **427 37th Street**
PROPERTY NAME: Knox Presbyterian Church
CONSTRUCTION DATE: 1940
DHR NUMBER (S): 122-5087-0135 122-0933
DESCRIPTION (S):
This is a one-story church designed in the Colonial Revival style and constructed in 1940. It incorporates a brick foundation and a brick structural system clad in Flemish bond brick. The west façade features a projecting entrance block. The primary entrance is comprised of a double-leaf, metal, paneled doors surmounted by a fanlight with a centrally located wood paneled fan and an articulated keystone. The entrance block features stuccoed pilasters; a wide frieze; a cornice with modillions; and a pediment broken by a brick lantern. The lantern features a circular, wood window with articulated springers and a cornice surmounted by a cupola. The cupola features an octagonal base; a metal-clad, round dome resting on a base with Tuscan columns; round arch windows with articulated keystones; and carved, swag details. The church features 24/20, metal, double-hung sash windows with round arch upper sashes with articulated keystones and springers. The roof is gable clad in asphalt shingles with a boxed cornice. The church features an interior, brick chimney on the east elevation.

- This is a two-story church school designed in the Colonial Revival style and constructed in 1956. It incorporates a brick foundation and a brick structural system clad in Flemish bond brick. The north façade features a centrally located entrance comprised of a single-leaf door framed by pilasters and surmounted by a pediment. The educational facility features 6/6, wood, double-hung sash windows with rowlock brick sills and soldier-course brick lintels. The building features a limestone beltcourse above the second story windows. There is an intersecting gable on the west end of the north elevation. There is a recessed entrance on the first story of the east façade and a single-leaf door on the second story that is accessed by a metal stair. There is a one-story ell appended to the east elevation that features a single-leaf, wood, paneled door. The roof is flat with a parapet coped in metal.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **510 37th Street**
PROPERTY NAME: House, 510 37th Street

OTHER NAME (S):
CONSTRUCTION DATE: 1933
DHR NUMBER (S): 122-5087-1285
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1933. It incorporates a brick foundation and a wood frame structural system clad in asbestos shingles. The south façade features a one-story, one-bay porch with an asphalt-shingled, hipped roof and a brick pier. The primary entrance is comprised of a single-leaf door with a storm door. The house features 6/6, wood, double-hung sash windows with storm windows. There is a two-story, projecting, squared bay on the west end of the façade that is surmounted by a closed gable. The roof is gable clad in asphalt shingles. The house features an exterior, brick chimney with a corbelled cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **512 37th Street**
PROPERTY NAME: Duplex, 512 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-1286
DESCRIPTION (S):
This is a two-story duplex designed in the Late 19th and Early 20th Century American Movement style and constructed in 1922. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a two-story, two-bay porch with an asphalt-shingled, hipped roof; wood, battered piers; and closed, wood balustrades. The primary entrance is comprised of a single-leaf, wood door with a light. The second story porch is accessed by single-leaf, wood door with multiple lights. The duplex features individual and paired, 1/1, metal, double-hung sash windows. There is a two-story, projecting, squared bay on the east elevation. The roof is gable clad in asphalt shingles with wide eaves.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1945. It incorporates a wood frame structural system clad in corrugated metal. The roof has a shed form clad in corrugated metal.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **514 37th Street**
PROPERTY NAME: House, 514 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-1287
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1914. It incorporates a brick foundation and a stuccoed, wood frame structural system. The south façade features a centrally located primary entrance comprised of a single-leaf, wood door with six light and a wrought iron storm door

surmounted by a shed roof. The west end of the façade features a two-story porch incorporated under a shed roof extending from the main roof. The first story porch features stuccoed piers resting on brick pedestals; and a wrought iron balustrade. The second story porch has been enclosed and is clad in stucco punctuated by metal, sliding windows. The house features tripartite, 6/1, wood, double-hung sash windows and 6/6, metal, double-hung sash windows. There are two hip-roofed dormers on the façade that are clad wood shingles and feature 4-light, wood, casement windows. There is a one-story, projecting, squared oriel on the first story of the east elevation. The roof is hipped clad in asphalt shingles with wide eaves. There is a one-story, shed-roofed ell appended to the north elevation. The house features an exterior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **518 37th Street**
PROPERTY NAME: House, 518 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1951
DHR NUMBER (S): 122-5087-1288
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1951. It incorporates a brick foundation and a brick structural system. The south façade features a one-story, two-bay porch incorporated under a shed roof extending from the main roof. The porch features a metal awning; battered, wood piers; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf door with a storm door. The house features 1/1, metal, double-hung sash windows surmounted by metal awnings and flanked by non-functional shutters. The windows feature rowlock brick sills. There is a one-story, projecting, squared block on the east end of the south façade that is surmounted by an intersecting gable. The roof is side gable clad in asphalt shingles. The house features an exterior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **519 37th Street**
PROPERTY NAME: House, 519 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1289
DESCRIPTION (S):
This is a two-and-one-half story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and a brick structural system. The north façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; Tuscan, wood columns resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door flanked by sidelights and surmounted by a boarded transom. The house features individual and a paired, 1/1, wood, double-hung sash windows with storm windows. The windows also feature brick jack arches and rowlock brick sills. Non-functional shutters flank the façade windows. There is a one-story, projecting, canted oriel on the first story of the west elevation that is clad in wood. There is a single-leaf door on the west elevation. There are

hip-roofed dormers on the façade and east and west elevations. The dormers are clad in wood shingles and feature paired, 1/1, wood, double-hung sash windows. The roof is hipped clad in asphalt shingles with wide eaves. The house features interior, parged brick chimneys with corbelled caps on the east and west elevations. There is a one-story, vinyl-clad ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **521 37th Street**
PROPERTY NAME: House, 521 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1290
DESCRIPTION (S):
This is a two-and-one-half story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, shed roof; wood piers resting on brick pedestals; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a transom. The house features individual and a paired, 1/1, wood, double-hung sash windows with storm windows. There is a hip-roofed dormer on the façade that features a 1-light, wood, casement window and exposed, wood rafters under the eaves. The roof is hipped clad in asbestos shingles. The house features an interior, parged brick chimney on the east elevation. There is a one-story ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **523 37th Street**
PROPERTY NAME: House, 523 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1291
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system. The first story is clad in brick veneer and the second story is clad in aluminum siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features a metal awning; battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The west end of the porch has been screened. The primary entrance is comprised of a single-leaf door with a wrought iron storm door flanked by sidelights. The house features 6/1, wood, double-hung sash windows with storm windows. There is a gable-roofed dormer on the facade that features a tripartite window of a 6/1, wood, double-hung sash window flanked by 4/1, wood double-hung sash windows with storm windows. The dormer features exposed, wood rafters under the eaves and brackets under the rakes. There is a single-leaf door surmounted by a metal awning on the west elevation. The roof is side gable clad in asphalt shingles. The house features an interior, parged brick chimney on the west elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1955. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, paneled, roll-up door and an octagonal-shaped, vinyl, louvered vent. The roof is catslide clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **527 37th Street**
PROPERTY NAME: Apartment Building, 527 37th Street
OTHER NAME (S): Dalton Apartments
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-1292
DESCRIPTION (S):
This is a three-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1922. It incorporates a brick foundation and a 6-course, American bond brick structural system. The north façade is clad in common bond brick veneer. The north façade features two, three-story, one-bay porches flanking a projecting, centrally located, three-story, brick entrance block. The porches and the entrance are sheltered by a common, asphalt-shingled, hipped roof. The porches feature battered, wood piers on the third story resting on two-story brick pedestals with stone slab capitals on the first story; and plain, wood balustrades. The porches are accessed by single-leaf doors with storm doors. The primary entrance is comprised of a single-leaf, metal, paneled door with nine lights flanked by vinyl-clad sidelights and surmounted by a boarded transom and a dentiled cornice. An asphalt-shingled, pent roof with brackets and exposed, wood rafters under the eaves shelters the entrance. The entrance block features 1/1, metal, double-hung sash windows with rowlock brick sills surmounted by asphalt-shingled, pent roofs supported by brackets and exposed, wood rafters under the eaves. The building features 1/1, metal, double-hung sash windows with rowlock brick sills. The roof is flat with a stepped parapet and rowlock brick course coping. The building features a corbelled cornice. The building features an interior, brick chimney embedded in the west elevation wall.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **528 37th Street**
PROPERTY NAME: House, 528 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1293
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system. The first story is clad in brick veneer and the second story is clad in aluminum siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; a metal awning; wood Tuscan columns; and a plain, wood balustrade. The primary entrance is centrally located and is comprised of a single-leaf door flanked by sidelights. The house features 12/1 and 9/1, wood, double-hung sash windows with storm windows. There are two, projecting, canted bays on the second story facade. There are two, gable-roofed dormers on the façade and one gable-roofed

dormer on the east elevation. The dormers feature 6/6, wood, double-hung sash windows surmounted by closed gables. There is a two-story, projecting, squared bay on the west elevation that is surmounted by a closed gable. There is a one-story, shed-roofed addition appended to the east elevation. The addition is clad in aluminum siding and features 1/1, metal, double-hung sash windows. The roof is hipped clad in asphalt shingles with wide eaves.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in asbestos shingles. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **529 37th Street**
PROPERTY NAME: Apartment Building, 529 37th Street
OTHER NAME (S): Almah Apartments/Pauline
CONSTRUCTION DATE: 1924
DHR NUMBER (S): 122-5087-1294
DESCRIPTION (S):
This is a two-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1924. It incorporates a brick foundation and a 7-course, American bond brick structural system. The north façade is clad in brick veneer. The north façade features two, two-story, one-bay porches flanking a projecting, centrally located, two-story, brick entrance block. The porches and the entrance are sheltered by a shed roof extending from the main roof. The porches feature battered, wood piers on the second story resting on two-story brick pedestals and plain, wood balustrades. The porches are accessed by single-leaf, wood doors with lights and storm doors. The primary entrance is comprised of a single-leaf, metal, paneled door flanked on the west by a boarded sidelight and surmounted by a brick panel that reads “PAULINE”. An asphalt-shingled, pent roof supported by wood brackets shelters the entrance. The entrance block features a 1/1, wood, double-hung sash window with a storm window surmounted by an asphalt-shingled, pent roof supported by wood brackets. The building features 1/1, wood, double-hung sash windows with storm windows and rowlock brick sills. The roof is shed and is clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **531 37th Street**
PROPERTY NAME: House, 531 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1295
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad vinyl siding. The first story façade is clad in imitation rusticated stone veneer. The north façade features a one-story, two-bay porch incorporated under the main roof featuring a metal awning; clustered, wood piers resting on brick and vinyl-clad pedestals; and a plain, wood

balustrade. The east end of the porch has been screened. A second story porch is sheltered under an oversized, shed-roofed dormer. The second story porch features clustered, wood piers and a vinyl-clad balustrade. The second story porch is accessed by a single-leaf, wood door with nine lights and a storm door. The primary entrance is comprised of a single-leaf door flanked by sidelights. The house features 9/1, wood, double-hung sash windows with storm windows. There is a one-story, projecting, canted oriel on the first story of the east elevation. The roof is side gable clad in asphalt shingles with wide eaves. There is a one-story, shed-roofed ell appended to the south elevation. The house features an interior, parged brick chimney on the east elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1960. It incorporates a concrete block structural system. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **532 37th Street**
PROPERTY NAME: House, 532 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1296
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, enclosed porch with an asphalt-shingled, shed roof. A shorter false eave extends form the shed roof along the side elevations. The porch has been enclosed with asbestos siding punctuated by 1/1, metal, double-hung sash windows and features battered, wood piers. The primary entrance is centrally located and is comprised of a single-leaf storm door. The house features 1/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the second story façade windows. The roof is cross-gable clad in asphalt shingles with brackets under the rakes.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **533 37th Street**
PROPERTY NAME: House, 533 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1297
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, gable roof; battered, wood piers resting on an asbestos-clad balustrade; and a metal awning. The primary entrance is comprised of a single-leaf door with a storm door flanked by sidelights. The house features individual and paired, 9/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade and some of the side elevation windows. A metal awning

surmounts the second story façade windows. There is a shed-roofed wall dormer on the west elevation. The roof is gable clad in asphalt shingles with brackets under the rakes. There is a one-story ell appended to the north elevation. The house features a central, interior, parged brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **534 37th Street**
PROPERTY NAME: House, 534 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-1298
DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1922. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The south façade features a one-story, three-bay porch incorporated under a shed roof extending from the main roof. The porch features battered, wood piers resting on brick pedestals and a wood-shingled balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with six lights and a storm door. The house features individual and tripartite, 6/6, metal, double-hung sash windows. There is an oversized, gable-roofed dormer on the façade that features exposed, wood rafters under the eaves and brackets under the rakes. The roof side gable clad in asphalt shingles with brackets under the rakes. The house features an exterior, brick chimney with a corbelled cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **535 37th Street**
PROPERTY NAME: House, 535 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1299
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in weatherboard. The north façade features a one-story, two-bay porch with an asphalt-shingled, gable roof; and battered, wood piers resting on weatherboard-clad balustrade. The porch has been screened and is accessed by a single-leaf storm door. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the windows. There is a one-story, projecting, canted oriel on the first story of the east elevation. There are shed-roofed wall dormers on the east and west elevations. The roof is gable clad in composition tiles. The house features a central, interior, brick chimney with a metal chimney pot.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system clad in corrugated metal. The roof is gable clad in corrugated metal.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **538 37th Street**
PROPERTY NAME: House, 538 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1923
DHR NUMBER (S): 122-5087-1300
DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1923. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch incorporated under a shed roof extending from the main roof. The porch features battered and clustered, wood piers; and a curved, wood balusters. The primary entrance is comprised of a single-leaf door with a storm door. The house features 6/1, metal, double-hung sash windows. There is an oversized, shed-roofed dormer on the façade that features 6/1, metal, double-hung sash windows flanked by non-functional shutters. The roof side gable clad in asphalt shingles. The house features an exterior, brick chimney with a corbelled cap on the east elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1925. It incorporates a wood frame structural system clad in vinyl siding. There are double-leaf, wood doors on the south elevation. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **545 37th Street**
PROPERTY NAME: House, 545 37th Street
OTHER NAME (S): The Dwelling Place
CONSTRUCTION DATE: 1904
DHR NUMBER (S): 122-5087-0109 122-0138
DESCRIPTION (S):
This is a two-and-one-half story house designed in the Shingle style and constructed in 1904. It incorporates a brick foundation and a wood frame structural system. The first story is clad in brick veneer and the upper stories are clad in wood shingles. The north façade features a centrally located one-story, one-bay porch incorporated under a projecting, squared bay surmounted by an asphalt-shingled, shed roof. The porch features heavy, stuccoed Tuscan columns. The projecting bay features a window grouping of two, 9/9, metal, double-hung sash windows divided by a wood-shingled panel. The primary entrance is centrally located and is comprised of a single-leaf, metal, paneled door flanked by 8-light, wood casement windows. On the first story flanking the entrance are two, one-story, projecting, squared bays. The bays features stuccoed bases and tripartite windows of 12/12, wood, double-hung sash windows flanked by 6/6, wood, double-hung sash windows. The west end of the first story façade features paired, 6/6, wood, double-hung sash windows with storm windows in a wood-shingled window opening surmounted by a brick rounded arch. The upper stories feature 9/9, metal, double-hung sash windows. The west elevation features a shed-roofed dormer with exposed, wood rafters sheltering a second story porch. The porch is one bay and features a carved wood balustrade wood-shingled piers. The east elevation features a one-and-one-half story, projecting, squared bay incorporated under the main roof. The bay features a double-hung sash window with a rounded arch upper sash; and an incorporated porch with brick piers. The roof is complex and comprised of two parallel steeply pitched gables

clad in asphalt shingles with exposed, wood rafters under the eaves. The west gable is two-story. The house features two, interior, brick chimneys with concrete caps and metal chimney pots on the east elevation. There is an interior, brick chimney with a concrete cap and a metal chimney pot on the south elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1980. It incorporates a wood frame structural system clad in aluminum siding. The garage features double-leaf doors. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **605 37th Street**
PROPERTY NAME: House, 605 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1929
DHR NUMBER (S): 122-5087-1301
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1929. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood door with nine lights and a storm door. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. There are intersecting gables on the façade and west elevation. The façade gable features a rectangular, metal, louvered vent. The roof is hipped clad in asphalt shingles. The house features an exterior, brick chimney on the east elevation and an interior, brick chimney on the south elevation.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system and a gable roof clad in asphalt shingles.
- This is a one-story shed designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system and a gable roof clad in asphalt shingles.

CONTRIBUTING (3 - buildings)

PROPERTY ADDRESS: **613 37th Street**
PROPERTY NAME: House, 613 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1302
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The east end of the porch has been screened. The primary entrance is

comprised of a single-leaf, metal, paneled door with a storm door. The house features 6/1, wood, double-hung sash windows with storm windows. There is a shed-roofed dormer on the facade that features 6/1, wood, double-hung sash windows flanked by non-functional shutters. The roof is side gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **614 37th Street**
PROPERTY NAME: House, 614 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1908
DHR NUMBER (S): 122-5087-1303
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1908. It incorporates a brick foundation and a wood frame structural system clad in weatherboard. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a wide frieze; squared, wood columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the windows. There is a two-story, projecting, canted bay on the west end of the façade that is surmounted by a closed gable. The closed gable features a 1/1, wood, double-hung sash window. There is a two-story, projecting, canted bay on the west elevation that is surmounted by a closed gable. The roof is hipped-cross-gable clad in asphalt shingles with wide eaves. The house features an interior, brick chimney on the west elevation. There is a one-story ell appended to the north elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in vinyl siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **615 37th Street**
PROPERTY NAME: House, 615 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1304
DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1920. It incorporates a brick foundation and a wood frame structural system. The first story is clad in vinyl siding and the gables and dormers are clad in wood shingles. The north façade features a one-story, three-bay porch incorporated under a shed roof extending from the main roof. The porch features wrought iron posts and squat, wood piers resting on brick pedestals; and a brick balustrade. The primary entrance is centrally located and is comprised of a single-leaf, wood door with three lights and a storm door. The house features 6/1, wood, double-hung sash windows with storm windows. There is a gable-roofed dormer on the facade that features a tripartite, 6-light, wood casement window. The dormer features exposed, wood rafters under the eaves and brackets under the rakes. There is a one-story,

projecting, squared bay on the east elevation that is surmounted by an asphalt-shingled, gable roof with brackets. There is a one-story, projecting, squared bay on the west elevation that is surmounted by an asphalt-shingled, shed roof. The roof is side gable clad in asphalt shingles with brackets under the rakes. The house features an interior, brick chimney with a corbelled cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **618 37th Street**
PROPERTY NAME: House, 618 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-1305
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; a wide frieze; squared, wood columns resting on brick pedestals; and turned balusters. The primary entrance is comprised of a single-leaf, wood door with four lights and a wrought iron storm door. The house features 1/1, wood, double-hung sash windows with storm windows. There are two, gable-roofed dormers on the facade that feature 1/1, wood, double-hung sash windows surmounted by closed gables. The roof is gambrel clad in asphalt shingles with cornice returns. The house features an interior, parged brick chimney on the north elevation. There is a one-story, shed-roofed ell appended to the north elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1915. It incorporates a wood frame structural system clad in asbestos siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **619 37th Street**
PROPERTY NAME: House, 619 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1306
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, one-bay porch with an asphalt-shingled, gable roof; battered, wood piers resting brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with eight lights and a storm door flanked by 4-light sidelights with wood panels. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows and 1/1, metal, double-hung sash windows. Non-functional shutters flank the first story façade windows. The roof is Jerkinhead-gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **621 37th Street**
PROPERTY NAME: House, 621 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1307
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a wrought iron storm door flanked by sidelights. Wrought iron has been applied over the sidelights. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. There is a shed-roofed dormer on the facade that features 6/1, wood, double-hung sash windows flanked by non-functional shutters. There is a shed-roofed dormer on the south elevation. The roof is side gable clad in asphalt shingles. There is a one-story, shed-roofed ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **622 37th Street**
PROPERTY NAME: House, 622 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-1308
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door surmounted by a transom and flanked by sidelights. The house features 1/1, metal, double-hung sash windows. There is a one-story, projecting, canted bay on the east end of the second story façade that is surmounted by a closed gable. The closed gable is clad in fishscale-cut vinyl siding. The roof is side gable clad in asphalt shingles with cornice returns. The house features an exterior, parged brick chimney on the west elevation. There is a one-story ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **624 37th Street**
PROPERTY NAME: House, 624 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-1309

DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system. The first story is clad in weatherboard and the second story is clad in wood shingles. The south façade features a one-story, one-bay porch with an asphalt-shingled, shed roof; battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door. The house features 1/1, wood, double-hung sash windows with storm windows. An asphalt-shingled, pent roof supported by brackets surmounts the second story façade windows. The façade gable features a rectangular-shaped, metal, louvered vent. The roof is gable clad in asphalt shingles with brackets under the rakes. The house features an interior, brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **626 37th Street**
PROPERTY NAME: House, 626 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1310
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, one-bay porch with an asphalt-shingled, gable roof; battered, wood piers resting on parged brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door. The house features 6/6, wood, double-hung sash windows with storm windows. An asphalt-shingled, pent roof supported by brackets surmounts the second story façade windows. The façade gable features a six-light, wood, casement window. The roof is Jerkinhead-gable clad in asphalt shingles with brackets under the rakes. The house features two interior, brick chimneys on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **627 37th Street**
PROPERTY NAME: House, 627 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1311
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, gable roof; a chamfered, wood post resting on a brick pedestal; brick piers; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with eight lights and a storm door flanked by 4-light sidelights with wood panels. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the first story

façade windows. An asphalt-shingled, pent roof with brackets under the eaves surmounts the second-story façade windows. The roof is Jerkinhead-gable clad in asphalt shingles with brackets under the rakes.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **628 37th Street**
PROPERTY NAME: House, 628 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1312
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, one-bay porch with an asphalt-shingled, shed roof; battered, wood piers resting on parged brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood door with eight lights and wrought iron storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the first story façade windows. An asphalt-shingled, pent roof supported by brackets surmounts the second story façade windows. The roof is side gable clad in asphalt shingles with brackets under the rakes. The house features an interior, brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **629 37th Street**
PROPERTY NAME: House, 629 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1313
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a two-story porch incorporated under the main roof. The first story porch features a false, asphalt-shingled, hipped roof; clustered, battered, wood piers resting brick pedestals; and a plain, wood balustrade. The second story porch features vinyl-clad piers and a vinyl-clad balustrade. The west end of the second story porch has been enclosed and is clad in vinyl siding punctuated by 6/1, wood, double-hung sash windows with storm windows. The second story porch is accessed by a single-leaf door with a storm door. The primary entrance is comprised of a single-leaf, wood, paneled door with a light and a storm door flanked by 5-light sidelights. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **632 37th Street**
PROPERTY NAME: House, 632 37th Street

OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-1314
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; and wrought iron posts and balustrade. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a transom. The house features 4/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, squared bay on the west end of the façade that is surmounted by a closed gable. The closed gable features a 1/1, metal, double-hung sash window. There is a one-story, cantilevered, squared bay on the second story of the west elevation. An intersecting gable surmounts the bay. The roof is hipped-cross-gable clad in asphalt shingles with a wide frieze under the eaves. The house features an interior, brick chimney with a corbelled cap on the west elevation. There is a one-story addition appended to the north end of the east elevation. The addition incorporates a wood frame structural system clad in vinyl siding. The addition features a centrally located, single-leaf, metal, paneled door with a storm door surmounted by a pediment. The addition features individual and paired, 6/6, metal, double-hung sash windows. The addition has a side gable roof clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **633 37th Street**
PROPERTY NAME: House, 633 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1315
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a metal awning; battered, wood piers; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf with a storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows. There is a two-story, projecting, squared bay on the west elevation that is surmounted by an intersecting gable. There is an intersecting gable on the facade that features a one-light, wood, casement window. There is a hip-roofed dormer on the east elevation. There is a single-leaf, wood, paneled door on the east elevation. The roof is hipped-cross-gable clad in asphalt shingles. The house features a central, interior, brick chimney with a corbelled cap. There is a one-story ell appended to the south elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1945. It incorporates a wood frame structural system clad in asbestos siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **634 37th Street**
PROPERTY NAME: House, 634 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1911
DHR NUMBER (S): 122-5087-1316
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1911. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a wide frieze; wood, Tuscan columns resting on brick pedestals; and wood balustrade. The primary entrance is comprised of a single-leaf, wood door with a light surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, canted bay on the west end of the façade. The façade gable is closed and features a 6/6, wood, double-hung sash window. There is an intersecting, closed gable on the east elevation. The roof is gable clad in asphalt shingles with a boxed cornice and wide eaves. The house features an interior, brick chimney with a corbelled cap on the west elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1990. It incorporates a wood frame structural system clad in vinyl siding and vertical board. The addition features a metal, paneled, roll-up door with four lights shaped to resemble a fanlight. The roof is gable roof clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **635 37th Street**
PROPERTY NAME: House, 635 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1317
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a two-story porch incorporated under a shed roof extending from the main roof. The first story porch features a false, asphalt-shingled, hipped roof; a metal awning; wood piers resting on asbestos-clad pedestals; and a plain, wood balustrade. The second story porch features clustered, battered, wood piers and an asbestos-clad balustrade. The second story porch is accessed by a single-leaf door. The primary entrance is comprised of a single-leaf door flanked by 5-light sidelights. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a gable-roofed dormer on the façade that features paired, 1/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **637 37th Street**
PROPERTY NAME: House, 637 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1318
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system. The first story is clad in brick veneer and the second story is clad in aluminum siding. The north façade features a two-story porch incorporated under a shed roof extending from the main roof. The first story porch features a false, asphalt-shingled, hipped roof with exposed, wood rafters under the eaves; battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The second story porch has been enclosed and is clad in aluminum siding punctuated by 1/1, wood, double-hung sash windows with storm windows. There are two entrances on the façade that are comprised of single-leaf doors with storm doors. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a gable-roofed dormer on the façade that is clad in asphalt shingles and features paired, 1/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles with exposed, wood rafters under the eaves. There is a one-story, shed-roofed ell appended to the south elevation. This house has been converted into a duplex.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **639 37th Street**
PROPERTY NAME: House, 639 37th Street
OTHER NAME (S): Duplex, 639 37th Street
CONSTRUCTION DATE: 1925
DHR NUMBER (S): 122-5087-1319
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1925. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door. The house features individual and paired, 1/1, metal, double-hung sash windows. There is a gable-roofed dormer on the façade that features paired, 1/1, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles. There is a one-story, shed-roofed ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **641 37th Street**
PROPERTY NAME: Church, 641 37th Street
OTHER NAME (S): Colonial Place Tabernacle, 645 37th Street/Faith Temple of Church of God in Christ
CONSTRUCTION DATE: circa 1940

DHR NUMBER (S): 122-5087-1321
DESCRIPTION (S):
This is a one-story church designed in the Colonial Revival style and constructed circa 1940. It incorporates a brick foundation and a wood frame structural system clad in brick veneer. The north façade features a two-story, centrally located, projecting, squared, tower with entrance surmounted by a flat roof with wide eaves. The primary entrance is comprised of a double-leaf, metal, paneled door. The church features 2/2, wood, double-hung sash, stained glass windows with rowlock brick sills. There is a single-leaf door on the west elevation. The roof is gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **701 37th Street**
PROPERTY NAME: House, 701 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1322
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1916. It incorporates a parged brick foundation and a wood frame structural system clad aluminum siding. The north façade features a one-story, two-bay porch incorporated under the main roof featuring squared, wood posts and an aluminum-clad balustrade. A second story porch is sheltered under an oversized, hip-roofed dormer. The second story porch features clustered, wood posts and an aluminum-clad balustrade. The second story porch is accessed by a single-leaf, wood door with a light. The primary entrance is comprised of a single-leaf, wood door with a diamond-shaped light surmounted by a transom and flanked by sidelights. The house features 9/1, wood, double-hung sash windows with storm windows. The first story façade features a tripartite window of a 12/1, wood, double-hung sash window flanked by 9/1, wood, double-hung sash windows with storm windows. There is a one-story, projecting, squared oriel on the first story of the east elevation. The roof is side gable clad in asphalt shingles. There is a one-story, shed-roofed ell appended to the south elevation. The house features an interior, parged brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **703 37th Street**
PROPERTY NAME: House, 703 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1323
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1916. It incorporates a parged brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features chamfered, wood posts and a wrought iron balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a wrought iron storm

door. The first story façade features a tripartite window of a 12/1, wood, double-hung sash window flanked by 9/1, wood, double-hung sash windows. There is a shed-roofed dormer on the facade that features 8/8, metal, double-hung sash windows. There is a one-story, projecting, squared oriel on the west elevation. The roof is side gable clad in asphalt shingles. The house features an interior, parged brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **704 37th Street**
PROPERTY NAME: House, 704 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1324
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1917. It incorporates a stuccoed brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, one-bay porch with an asphalt-shingled, gable roof; stuccoed piers with stylized capitals; and a stuccoed balustrade. The porch has been screened. The primary entrance is comprised of a single-leaf door. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows. The façade gable features a tripartite, 3-light, wood, casement window. There is a two-story, projecting, squared bay on the east elevation that is surmounted by a shed roof extending from the main roof. The roof is gable clad in asphalt shingles. There is a one-story, shed-roofed ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **705 37th Street**
PROPERTY NAME: House, 705 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-1325
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1915. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features squared, wood posts resting on an asbestos-clad balustrade. The primary entrance is comprised of a single-leaf, metal door with a diamond-shaped light and a storm door. The first story façade features 1/1, wood, double-hung sash windows with storm windows. There is a shed-roofed dormer on the facade that features 1/1, wood, double-hung sash windows with storm windows. There is a one-story, projecting, squared oriel on the west elevation. The roof is side gable clad in asphalt shingles with brackets under the rakes. There is a one-story, shed-roofed ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **709 37th Street**
PROPERTY NAME: Duplex, 709 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1326
DESCRIPTION (S):
This is a two-and-one-half-story duplex designed in the Colonial Revival style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features two entrances. The east entrance is on the ground level is comprised of a single-leaf, metal, paneled door flanked by wood paneled sidelights. The west entrance is on the first story comprised of a single-leaf, metal, paneled door with a storm door accessed by brick stairs with a wrought iron balustrade. The duplex features 1/1, metal, double-hung sash windows. There is a gable-roofed wall dormer on the east elevation. There is a two-story, projecting, squared bay on the west elevation with a gable-roofed dormer above. The roof is side gable clad in asphalt shingles with cornice returns on the facade.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **710 37th Street**
PROPERTY NAME: House, 710 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1327
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; battered, wood piers resting on brick pedestals; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door flanked by 10-light sidelights. The house features 1/1, metal, double-hung sash windows with storm windows. There is an oversized, fixed, wood, diamond-paned window on the first story façade. There are intersecting gables on the façade and the east elevation that feature 1/1, metal, double-hung sash windows. The roof is hipped clad in asphalt shingles with wide eaves. The house features an interior, brick chimney with a built-up cap on the west elevation. There is a one-story, shed-roofed ell appended to the north elevation.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system, clad in corrugated metal. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **713 37th Street**
PROPERTY NAME: House, 713 37th Street
OTHER NAME (S):

CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-1328
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1914. It incorporates a brick foundation and a wood frame structural system. The first story façade is clad in weatherboard and the second story facade is clad in wood shingles. The side elevations are clad in vinyl siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, gable roof; plain, wood posts flanking the central entrance; battered, wood piers resting on brick pedestals at the corners; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a fan-shaped light surmounted by a transom. The house features 6/1, wood, double-hung sash windows with storm windows. An asphalt-shingled, pent roof with exposed, wood rafters under the eaves surmounts a tripartite window grouping of 6/1, wood, double-hung sash windows on the second story façade. There is a one-story, projecting, squared oriel on the first story of the west elevation. The façade gable features a 6-light, wood, casement window. The roof is side gable clad in asphalt shingles with brackets under the rakes and exposed, wood rafters under the eaves. The house features an interior, parged brick chimney on the west elevation. There is a one-story, shed-roofed ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **714 37th Street**
PROPERTY NAME: Duplex, 714 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1329
DESCRIPTION (S):
This is a two-story duplex designed in the Colonial Revival style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a two-story, two-bay porch incorporated under the main roof. The porches feature two-story, wood piers resting on brick pedestals and asbestos-clad balustrades. The second story porch is accessed by a single-leaf door. There are two entrances on the façade that are comprised of single-leaf, metal doors with storm doors. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles with wide eaves. There is a gable-roofed dormer on the façade that features paired, 1/1, wood, double-hung sash windows and wide eaves.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **715 37th Street**
PROPERTY NAME: House, 715 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-1330
DESCRIPTION (S):

This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1914. It incorporates a brick foundation and a wood frame structural system. The first story is clad in vinyl siding and the second story is clad in wood shingles. The north façade features a one-story, one-bay porch with an asphalt-shingled, hipped roof with exposed, wood rafters under the eaves; battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a wrought iron storm door. The house features 6/1, wood, double-hung sash windows with storm windows. An asphalt-shingled, pent roof with exposed, wood rafters and brackets under the eaves surmounts a tripartite window on the second story façade. The tripartite window also features a plain, wood balustrade mounted on the porch roof. There is a one-story, projecting, squared oriel with a shed roof on the first story of the west elevation. The façade gable features a 6-light, wood, casement window. The roof is gable clad in asphalt shingles with brackets under the rakes and exposed, wood rafters under the eaves. The house features an interior, brick chimney on the west elevation. There is a one-story, shed-roofed ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **716 37th Street**
PROPERTY NAME: House, 716 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1331
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, one-bay porch on the west end with an asphalt-shingled, gable roof; a wide frieze; battered, wood piers; and a vinyl-clad balustrade. The porch has been screened. The primary entrance is comprised of a single-leaf, wood paneled door. The house features individual and paired, 6/1, metal, double-hung sash windows. The façade gable features a 6-light, wood, casement window. The roof is gable clad in asphalt shingles. The house features an interior, parged brick chimney on the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **717 37th Street**
PROPERTY NAME: House, 717 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-1332
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1914. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features clustered, wood posts resting on brick pedestals; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf, wood door with a wrought iron storm door. The house features 1/1, metal, double-hung sash windows. There is a gable-roofed

dormer on the facade that features a 6-light, wood casement window at the roof apex and brackets under the rakes. The roof is side gable clad in asphalt shingles with brackets under the rakes. The house features an exterior, brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **720 37th Street**
PROPERTY NAME: House, 720 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1333
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, one-bay porch with an asphalt-shingle, gable roof with brackets under the rakes; brick piers; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf, metal door. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows. The roof is side gable clad in asphalt shingles. There is a gable-roofed dormer on the façade that features paired, 6-light, wood casement windows and brackets under the rakes. There is a one-story ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **722 37th Street**
PROPERTY NAME: House, 722 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1334
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, one-bay porch with an asphalt-shingle, gable roof; thin, wood columns; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles with wide eaves. There is a hip-roofed dormer on the façade that features paired, 3/3, wood, double-hung sash windows. There is a one-story ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **723 37th Street**
PROPERTY NAME: House, 723 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1954

DHR NUMBER (S): 122-5087-1335
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1954. It incorporates a concrete block foundation and a wood frame structural system, clad in vinyl siding. The north façade features a one-story, one-bay porch with an asphalt-shingled, gable roof; and wrought iron posts and balustrade. The primary entrance is comprised of a single-leaf, metal door with an oval-shaped light and a storm door. The house features 2/2, wood, double-hung sash windows with storm windows. There is a fixed, wood window flanked by 2/2, wood, double-hung sash windows on the façade. The roof is side gable clad in asphalt shingles. There is a one-story ell appended to the south elevation.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1954. It incorporates a wood frame structural system clad in vinyl siding. The roof is side gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **724 37th Street**
PROPERTY NAME: House, 724 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1953
DHR NUMBER (S): 122-5087-1336
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Modern Movement style and constructed in 1953. It incorporates a concrete block foundation and a wood frame structural system, clad in vinyl siding. The south façade features a one-story, one-bay porch with an asphalt-shingled, gable roof; and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal door with a storm door. The house features 1/1, metal, double-hung sash windows. The roof is gable clad in asphalt shingles. The façade gable features a 1/1, metal, double-hung sash window.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **725 37th Street**
PROPERTY NAME: House, 725 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-1337
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1912. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch incorporated under a shed roof extending from the main roof. The porch features battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood door with a storm door surmounted by a transom and flanked by sidelights. The house features 6/1 and 9/1, wood, double-hung sash windows. There is a wood, Queen Anne, double-hung sash window flanked

by 9/1, wood, double-hung sash windows on the first story façade. There is an oversized, gable-roofed dormer on the east end of the façade. There is a one-story, projecting, squared bay on the west elevation that is surmounted by an asphalt-shingled, shed roof. There is a shed-roofed dormer on the south elevation. The roof is side gable clad in asphalt shingles. The house features an interior, brick chimney on the east elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1915. It incorporates a wood frame structural system clad in asbestos siding. The garage features a wood, paneled, roll-up garage door with lights. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **728 37th Street**
PROPERTY NAME: House, 728 37th Street
OTHER NAME (S): Duplex, 728 37th Street
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-1338
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1915. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The east end of the south façade features a one-story, one-bay porch with an asphalt-shingled, gable roof; wood, Tuscan columns resting on brick pedestals; and a plain, wood balustrade. There are two entrances on the façade that are comprised of single-leaf, wood doors with diamond-shaped lights and storm doors. The house features 1/1, wood, double-hung sash windows with storm windows. There is a tripartite, metal, fixed window on the east end of the second story façade. There is a one-story, projecting, rounded bay on the west end of the first story façade that features a brick base surmounted by a hipped roof. There is a gable-roofed dormer on the west end of the façade that features a 1/1, wood, double-hung sash window. The roof is side gable clad in asphalt shingles with exposed, wood rafters under the eaves. The house features an interior, parged brick chimney on the west elevation. This house has been converted into a duplex.

- This is a one-story, two-car garage designed in the Modern Movement style and constructed circa 1990. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, paneled, roll-up garage door with lights. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **731 37th Street**
PROPERTY NAME: House, 731 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1339
DESCRIPTION (S):

This is a two-story house designed in the Craftsman style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features a metal awning; battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a storm door flanked by non-functional shutters. The house features 1/1, wood, double-hung sash windows with storm windows. There is an oversized, hip-roofed dormer on the façade that features individual and paired, double-hung sash windows surmounted by metal awnings. There is hip-roofed dormer on the south elevation. The roof is side gable clad in asphalt shingles. The house features an interior, parged brick chimney on the east elevation. There is a one-story, shed-roofed ell appended to the south elevation.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1970. It incorporates a wood frame structural system clad in pressure treated lumber. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **733 37th Street**
PROPERTY NAME: House, 733 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1340
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story porch incorporated under the main roof. The porch features battered, wood piers resting brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal door with an oval light and a wrought iron storm door flanked by 5-light sidelights. The house features individual and tripartite, 6/1 and 4/1, wood, double-hung sash windows with storm windows. There is an oversized, gable-roofed dormer on the facade that shelters a second story porch. The second story porch features plain, wood posts and a vinyl-clad balustrade. The second story porch is accessed by a single-leaf, wood door with 4 lights and a storm door. The roof is side gable clad in asphalt shingles. The house features an interior, parged brick chimney on the west elevation.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1960. It incorporates a concrete block structural system. The roof is shed clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **735 37th Street**
PROPERTY NAME: House, 735 37th Street
OTHER NAME (S): Duplex, 735 37th Street

CONSTRUCTION DATE: 1906
DHR NUMBER (S): 122-5087-1341
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1906. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, one-bay porch with an asphalt-shingled, gable roof; square, wood columns; a wrought iron balustrade; and a pediment with a wide frieze. The primary entrance is comprised of a single-leaf, metal, paneled door. The house features 2/2, wood, double-hung sash windows with storm windows. There is a one-story, projecting, squared oriel on the first story of the west elevation. There is a two-story, projecting, squared bay on the east end of the façade that is surmounted by a closed gable. There is a two-story, projecting, canted bay on the east elevation that is surmounted by a closed gable. There is a hip-roofed dormer on the west elevation that is clad in wood shingles. The roof is hipped-cross-gable clad in asphalt shingles. There is a one-story, shed-roofed ell appended to the south elevation.

- This is a one-story, two-car garage designed in the Modern Movement style and constructed circa 1945. It incorporates a concrete block structural system clad in vinyl siding and concrete block. The garage features a metal, roll-up garage door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **800 37th Street**
PROPERTY NAME: Blessed Sacrament Church
OTHER NAME (S): Mt. Gilead Pentecostal Holiness Church
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0134 122-0139
DESCRIPTION (S):
This is a one-story church designed in the Gothic Revival style and constructed in 1920. It incorporates a brick foundation and a brick structural system clad in rusticated stone veneer. The north and south elevation features buttresses. The east façade features a one-story, projecting, gable-roofed vestibule. The primary entrance is comprised of double-leaf, wood, paneled, pointed-arch doors. The entrance block features a parapet and buttresses. The east facade and the west elevation feature wood, pointed arch, stained glass windows with storm windows. The church features tripartite, leaded, stained glass windows with clerestory windows on the north and south elevations. The roof is gable is clad in slate shingles with a stone parapet. There is a stone cross at the roof apex of the east elevation. There is a one-story, shed-roofed ell appended to the west elevation that features a single-leaf, wood door. There is a one-story addition appended to the west end of the north elevation. The addition features a single-leaf door accessed by a handicap ramp. The church features an interior, brick chimney clad in rusticated stone veneer on the on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **807 37th Street**
PROPERTY NAME: Blessed Sacrament Church School
OTHER NAME (S): Tabernacle Prayer Christian School

CONSTRUCTION DATE: circa 1950
DHR NUMBER (S): 122-5087-1342
DESCRIPTION (S):
This is a two-story church school designed in the Modern Movement style and constructed circa 1950. It incorporates a concrete block structural system. The primary entrance is located on the east façade. The primary entrance is comprised of a single-leaf, metal door sheltered by an extension of the main roof supported by tapered, metal posts. There is a one-and-one-half-story brick wall at the northeast corner, which projects above the roofline that is coped in metal. The building features multiple-light, metal, awning windows. There are double-leaf doors located on the north elevation. The roof is gable clad in standing-seam metal.

- This is a church school designed in the Modern Movement style and constructed circa 1955. It is comprised of a flat-roofed block appended to the west elevation of the gable-roofed block. The flat-roofed block incorporates a concrete block structural system clad in brick veneer on the north and south elevations. It features multiple-light, metal, awning windows with rowlock brick sills. There is a single-leaf metal door located on the west elevation of the flat-roofed block. The roof is flat with wide eaves coped in metal.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **814 37th Street**
PROPERTY NAME: Blessed Sacrament Church Convent
OTHER NAME (S): Nursing Home, 814 37th Street/Madonna Home
CONSTRUCTION DATE: 1954
DHR NUMBER (S): 122-5087-1343
DESCRIPTION (S):
This is a two-story convent designed in the Modern Movement style and constructed in 1954. It incorporates a concrete block foundation and a wood frame structural system clad in brick veneer. The building features metal, casement windows with rowlock brick sills. There is a one-story ell appended to the west end of the south façade. There are metal stairs appended to the east elevation. The roof is flat with a wide frieze and wide eaves. This property has been converted to a nursing home.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **815 37th Street**
PROPERTY NAME: Apartment Building, 815 37th Street
OTHER NAME (S): Somme Apartments
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1344
DESCRIPTION (S):
This is a two-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1918. It incorporates a brick foundation and a 7-course, American bond brick structural system clad in brick. The north façade features two, two-story, one-bay porches flanking a central entrance block. A common, asphalt-shingled, hipped roof shelters the porches and the entrance with exposed, wood

rafters under the eaves. The porch decks and balustrades have been removed and only the two-story, brick piers and brick bases remain. The porches feature brick piers and plain, wood balustrades. The porch doors are single-leaf, wood, and 15-light surmounted by brick jack arches. The primary entrance is centrally located in the entrance block and is comprised of a single-leaf, wood door with one light flanked on the west by a boarded sidelight and surmounted by an asphalt-shingled, pent roof supported by wood brackets. The building features 1/1, wood, double-hung sash windows with storm windows and rowlock brick sills. Brick flat arches surmount the façade windows and 2-course, header-brick flat arches surmount the side elevation windows. The roof is flat with a stepped parapet coped in a rowlock brick course. The building features a corbelled cornice on the facade.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **817 37th Street**
PROPERTY NAME: Apartment Building, 817 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1940
DHR NUMBER (S): 122-5087-1345
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1940. It incorporates a brick foundation and structural system clad in brick veneer. The primary entrance is located on the east elevation and is comprised of a single-leaf door surmounted by an asphalt-shingled, pent roof supported by wood brackets. The building features individual and paired, 6/6, wood, double-hung sash windows with storm windows, rowlock brick sills and soldier-course brick lintels. The west elevation features a three-story, metal stair incorporated into a recessed stairwell under the main roof. The building features hip-roofed dormers on the façade and the east and west elevations that are clad in wood shingles and features 6/6, wood, double-hung sash windows. The roof is deck-on-hip clad in slate shingles. The building features an interior, brick chimney on the west elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1945. It incorporates a brick structural system. The garage features a metal, paneled, roll-up door. The roof is hipped clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **821 37th Street**
PROPERTY NAME: House, 821 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1346
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door flanked by 5-light

sidelights. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles. The house features an interior, parged brick chimney on the west elevation and an exterior, brick chimney on the east elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in asbestos siding. The garage features a metal, roll-up door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **822 37th Street**
PROPERTY NAME: House, 822 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: circa 1920
DHR NUMBER (S): 122-5087-1347
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed circa 1920. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a two-story porch incorporated under a shed-roof extending from the main roof. The first story porch features plain, wood posts and balustrade. The second story porch has been enclosed and is clad in aluminum siding punctuated by paired, 1/1, metal, double-hung sash windows. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light flanked by 6-light sidelights. The house features individual and paired, 1/1, metal, double-hung sash windows. There is a shed-roofed dormer on the façade. There is a two-story, projecting, canted bay on the west elevation. There is a single-leaf, wood, paneled door with lights on the west elevation. The roof is side gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **823 37th Street**
PROPERTY NAME: House, 823 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1348
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; asbestos-clad, battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door flanked by 5-light sidelights. The house features individual and paired, 6/6, metal, double-hung sash windows. The façade gable features a 4/4, metal, double-hung sash window. There is a double-hung sash window surmounted by a fan-shaped window on the west elevation. There is a single-leaf door with a storm door on the west elevation. The roof is gable clad in asphalt shingles with brackets under the rakes. The house features an interior, brick chimney on the west elevation. There is a one-story, shed-roofed ell appended to the

south elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, roll-up door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **825 37th Street**
PROPERTY NAME: House, 825 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1349
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch incorporated under a shed roof extending from the main roof. The porch features plain, wood posts. The primary entrance is comprised of a single-leaf, wood door with a storm door. The house features 1/1, wood, double-hung sash windows with storm windows. There is an oversized, gable-roofed dormer on the façade. There is a one-story, projecting, squared bay on the west elevation that is surmounted by a shed roof. The roof is side gable clad in asphalt shingles. The house features an interior, brick chimney on the east elevation. There is a two-story ell appended to the south elevation. The ell features an incorporated porch on the first story.

- This is a one-story shed designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1930. It incorporates a wood frame structural system clad in vinyl siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **826 37th Street**
PROPERTY NAME: House, 826 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-1350
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1919. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The south façade features a one-story, two-bay porch incorporated under a shed roof extending from the main roof. The porch features stuccoed, brick piers; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood door with multiple lights and a storm door flanked by 6-light sidelights. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows. There is an oversized, shed-roofed dormer on the façade. There is a shed-roofed dormer on the north elevation. The roof is side gable clad in asphalt shingles.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **827 37th Street**
PROPERTY NAME: House, 827 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1351
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, one-bay porch with an asphalt-shingled gable roof with exposed outriggers and square, wood posts resting on a brick balustrade. The primary entrance is comprised of a single-leaf, wood door with six lights and a storm door flanked by 4/1, wood, double-hung sash windows. The house features 1/1, metal, double-hung sash windows. The roof is Jerkinhead-gable clad in slate shingles with cornice returns on the façade; exposed outriggers; and wide eaves on the side elevations with modillions. There is a one-story, shed-roofed ell appended to the south elevation.

- This is a one-story shed designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in pressure treated lumber. The roof is clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **828 37th Street**
PROPERTY NAME: House, 828 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1352
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The first story of the south façade is clad in brick veneer. The south façade features a one-story, two-bay porch incorporated under a shed roof extending from the main roof. The porch features plain, wood posts. The primary entrance is comprised of a single-leaf, metal door with a storm door flanked by sidelights. The house features individual and paired, 6/6, metal, double-hung sash windows with storm windows. There is an oversized, shed-roofed dormer on the façade. There is a shed-roofed dormer on the north elevation. The roof is side gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **830 37th Street**
PROPERTY NAME: House, 830 37th Street
OTHER NAME (S):

CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-1353
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1922. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch incorporated under a shed roof extending from the main roof. The porch features wood piers resting on brick pedestals and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door. The house features individual and paired, 6/6, metal, double-hung sash windows. There is an oversized, shed-roofed dormer on the façade. There is a shed-roofed dormer on the north elevation. The roof is side gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **833 37th Street**
PROPERTY NAME: House, 833 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1951
DHR NUMBER (S): 122-5087-1354
DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1951. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, one-bay porch with a metal awning roof and wrought iron posts and balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door. The house features 1/1, metal, double-hung sash windows. There is a one-light, metal fixed window flanked by 1/1, metal, double-hung sash windows on the east end of the façade. Non-functional shutters flank the façade windows. The roof is side gable clad in asphalt shingles.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1955. It incorporates a metal frame structural system clad in corrugated metal.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **837 37th Street**
PROPERTY NAME: House, 837 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1923
DHR NUMBER (S): 122-5087-1355
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival-Craftsman style and constructed in 1923. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, one-bay porch with an asphalt-shingled, hipped roof with exposed, wood rafters under the eaves; square, wood columns; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf, wood door with eight lights and a storm door. The house features individual and paired, 6/6, metal,

double-hung sash windows. The roof is hipped clad in composition tiles with exposed, wood rafters under the eaves. The house features a central, interior, brick chimney. There is a one-story, shed-roofed ell appended to the south elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system clad in corrugated metal. The roof is gable clad in asphalt shingles.
- This is a one-story shed designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1925. It incorporates a wood frame structural system clad in weatherboard. The roof is gable clad in asphalt shingles with cornice returns.

CONTRIBUTING (3 - buildings)

PROPERTY ADDRESS: **843 37th Street**
PROPERTY NAME: House, 843 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1987
DHR NUMBER (S): 122-5087-1356
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1987. It incorporates a concrete foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The first story façade is clad in brick veneer. The primary entrance is comprised of a single-leaf, metal, paneled door. The house features 1/1, metal, double-hung sash windows. Non-functional shutters flank the façade windows. The first story façade windows feature rowlock brick sills and have been covered with metal bars. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **845 37th Street**
PROPERTY NAME: House, 845 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1357
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a two-story porch with an asphalt-shingled, hipped roof. The first story porch has two bays and has been screened. The first story porch features a dentiled cornice; square, wood columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door. The second story porch has been enclosed and is clad in vinyl siding punctuated by individual, 6/1 windows on the side elevations and paired, 6/1, metal, double-hung sash windows surmounting wood panels and flanked by non-functional shutters on the facade. The house features 6/1, metal, double-hung sash windows. There is a one-story, projecting, squared bay on the west

elevation that is surmounted by a shed roof. There is a single-leaf door on the west elevation. The façade gable is clad in fishscale-cut, wood shingles. The roof is cross-gable clad in asphalt shingles with exposed wood rafters under the eaves. There is a one-story, shed-roofed porch appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **846 37th Street**
PROPERTY NAME: House, 846 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-1358
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1922. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, two-bay porch on the east end with an asphalt-shingled, gable roof; battered, wood piers resting on brick pedestals; and a wood balustrade. The porch gable is clad in vinyl siding and features a rectangular-shaped, metal, louvered vent. The primary entrance is comprised of a single-leaf metal, paneled door with a storm door. The house features 1/1, metal, double-hung sash windows. The windows on the east and west elevations have been boarded. There is a one-story, projecting, squared bay on the west elevation that is surmounted by a shed roof. There is a single-leaf door on the east elevation that is surmounted by an intersecting gable. The roof is gable clad in asphalt shingles with wide eaves. The house features a central, interior, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **848 37th Street**
PROPERTY NAME: House, 848 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1359
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, three-bay porch incorporated under the main roof. The porch features battered, wood piers resting on brick pedestals and plain, wood posts. The porch gable features a vinyl-clad window opening. The primary entrance is centrally located and is comprised of a single-leaf, metal, paneled door. The house features 1/1, metal, double-hung sash windows. The roof is gable clad in asphalt shingles with wide eaves. The house features a central, interior, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **850 37th Street**
PROPERTY NAME: House, 850 37th Street
OTHER NAME (S):

CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1360
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1920. It incorporates a parged brick foundation and a wood frame structural system clad in asbestos siding. The south façade is clad in brick veneer. The south facade features a one-story, three-bay porch incorporated under the main roof. The porch has been screened and features battered, wood piers and turned balusters. The porch gable features a rectangular-shaped, metal, louvered vent. The primary entrance is centrally located and is comprised of a single-leaf door with a wrought iron storm door. The house features 1/1, metal, double-hung sash windows. The roof is gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **851 37th Street**
PROPERTY NAME: House, 851 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1361
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, one-bay porch incorporated under the main roof at the west corner. The porch features a metal awning; a vinyl-clad pier; and a vinyl-clad balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a wrought iron storm door. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows flanked by non-functional shutters. There is an oversized, gable-roofed dormer on the façade. The roof is side gable clad in asphalt shingles. The house features a central, interior, brick chimney with a corbelled cap.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in asbestos siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **852 37th Street**
PROPERTY NAME: House, 852 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-1362
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1921. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a two-story porch with an asphalt-shingled, hipped roof. The first story porch has two bays and features vinyl-clad posts and balustrade. The primary entrance is comprised of a single-leaf door with a storm door. The second story porch

has been enclosed and is clad in vinyl siding punctuated by 1/1, metal, double-hung sash windows. The house features 1/1, metal, double-hung sash windows. There is a one-story shed-roofed addition appended to the west elevation. The roof is gable over hip clad in asphalt shingles with wide eaves. There is a one-story, shed-roofed ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **855 37th Street**
PROPERTY NAME: House, 855 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-1363
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1905. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The north façade features a two-story porch with an asphalt-shingled, hipped roof with exposed, wood rafters under the eaves. The first story porch has two bays and features plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, wood door with three lights surmounted by a transom. The second story porch has been enclosed and is clad in wood shingles punctuated by 2/2, wood, double-hung sash windows with storm windows. The house features 2/2, wood, double-hung sash windows with storm windows. The façade gable features a rectangular-shaped, metal, louvered vent and a dentiled, raking cornice. The roof is gable clad in asphalt shingles with boxed eaves, a wide frieze, dentiled cornice and cornice returns. The house features a central, interior, brick chimney with a corbelled cap and an interior, brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **858 37th Street**
PROPERTY NAME: Duplex, 858 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1988
DHR NUMBER (S): 122-5087-1364
DESCRIPTION (S):
This is a two-story duplex designed in the Modern Movement style and constructed in 1988. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system. The first story is clad in brick veneer and the second story is clad in vinyl siding. There is an entrance on the south façade, which is comprised of a single-leaf, metal, paneled door. There is a single-leaf, metal door surmounted by an asphalt-shingled, gable roof on the east elevation. The house features 6/6, metal, double-hung sash windows flanked by non-functional shutters. The first story façade windows feature rowlock brick sills. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **862 37th Street**

PROPERTY NAME: House, 862 37th Street
OTHER NAME (S): Duplex, 862 37th Street
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-1366
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1907. It incorporates a parged, brick foundation and a wood frame structural system clad in vinyl siding. The primary entrance is recessed from the façade and is comprised of a single-leaf door surmounted by a broken pediment with a dentiled cornice. The house features 1/1, wood, double-hung sash windows with storm windows. There is a one-story, projecting, canted bay on the west end of the façade that is surmounted by a standing-seam metal, hipped roof. The roof is shed clad in asphalt shingles with a dentiled cornice on the façade. This house has been converted into a duplex.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **864 37th Street**
PROPERTY NAME: House, 864 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-1367
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1905. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, screened porch with an asphalt-shingled, hipped roof; modillions on the cornice; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door. The house features 2/2, wood, double-hung sash windows with storm windows. The façade gable is clad in wood shingles and features a rectangular-shaped, metal, louvered vent and cornice returns. The roof is gable clad in asphalt shingles with modillions on the cornice and a wide frieze. The house features an interior, parged brick chimney on the north elevation. There is a one-story ell appended to the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1003 37th Street**
PROPERTY NAME: House, 1003 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-1369
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and a plain, wood balustrade. The east elevation of the porch features a pediment. The primary entrance is comprised of a single-leaf door

with a storm door surmounted by a transom. The house features 6/6, metal, double-hung sash windows. The façade gable features a Palladian window of a 1/1, wood, double-hung sash window with a rounded arch upper sash flanked by 1/1, wood, double-hung sash windows. There is a two-story, projecting, canted bay on the east elevation. The east elevation features a gable-roofed dormer with enclosed, round arch window opening and cornice returns. There is also a hip-roofed dormer on the east elevation. The roof is gable clad in asphalt shingles with a wide frieze, cornice and raking cornice.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1005 37th Street**
PROPERTY NAME: House, 1005 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1371
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; fluted, vinyl-clad columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door. The house features 1/1, metal, double-hung sash windows. The façade gable features a rectangular-shaped, metal, louvered vent. The roof is gable clad in asphalt shingles with wide eaves and a steep pitch. There is a one-story, shed-roofed ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1007 37th Street**
PROPERTY NAME: House, 1007 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1372
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; modillions on the cornice; square, wood posts with bracketed capitals; and a wood, lattice balustrade. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a transom. The house features 6/6, metal, double-hung sash windows. The façade gable features cornice returns. The roof is gable clad in asphalt shingles with a boxed cornice with modillions and a wide frieze. The house features an interior, parged brick chimney with a corbelled cap and a metal chimney pot on the east elevation. There is a one-story, shed-roofed ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1009 37th Street**

PROPERTY NAME: House, 1009 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1373
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; and wrought iron posts and balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door. The house features individual and paired, 2/2, wood, double-hung sash windows with storm windows. Wrought iron bars have been applied over the second story façade windows. The roof is hipped clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1011 37th Street**
PROPERTY NAME: House, 1011 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-1374
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1922. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, enclosed porch with an asphalt-shingled, hipped roof. The porch is clad in vinyl siding punctuated by 1/1, metal, double-hung sash windows. There is a single-leaf door with a storm door on the west elevation of the enclosed porch. The house features 2/2, wood, double-hung sash windows with storm windows. The façade gable features a 4-light, wood, casement window. The roof is gable clad in asphalt shingles with cornice returns.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1012 37th Street**
PROPERTY NAME: House, 1012 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1925
DHR NUMBER (S): 122-5087-1375
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1925. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, one-bay porch with an asphalt-shingled, gable roof and plain, wood posts. The primary entrance is comprised of a single-leaf, wood door. The house features one-light, fixed, wood windows on the façade and 1/1, wood, double-hung sash windows with storm windows on the side elevations. The façade gable eaves extend to the first story on the facade wall. The roof is cross-gable clad in asphalt shingles with exposed, wood rafters under

the eaves.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1014 37th Street**
PROPERTY NAME: House, 1014 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-1376
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1919. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story, one-bay porch with an asphalt-shingled, shed roof; wood, piers resting on brick pedestals and a closed, wood balustrade. The primary entrance is centrally located and is comprised of a single-leaf, wood door. The house features 1/1, wood, double-hung sash windows with storm windows and 4/1, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles with wide eaves. There is a one-story, shed-roofed ell appended to the north elevation.

- This is a two-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates wood frame structural system clad in asbestos siding. The garage features 6/6, wood, double-hung sash windows. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **1019 37th Street**
PROPERTY NAME: House, 1019 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1951
DHR NUMBER (S): 122-5087-1377
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Modern Movement style and constructed in 1951. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, one-bay porch with an asphalt-shingled, gable roof and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with two lights. The house features 6/6, metal, double-hung sash windows. There is a single-leaf door surmounted by a shed-roofed overhang and accessed by wood stairs on the east elevation. The façade gable features a 6/6, metal, double-hung sash window and a triangular-shaped, louvered vent at the roof apex. The roof is gable clad in asphalt shingles. There is a one-story, shed-roofed garage appended to the east elevation. The garage is recessed from the facade and features a metal, paneled, roll-up door.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1022 37th Street**

PROPERTY NAME: House, 1022 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1379
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The south façade features a one-story porch with an asphalt-shingled, shed roof with exposed, wood rafters under the eaves; and plain, wood posts and balustrade. The west end of the porch has been enclosed and is clad in vinyl siding. The primary entrance is comprised of a single-leaf door with a storm door. The house features 1/1, wood, double-hung sash windows with storm windows. The façade gable features a square, metal, louvered vent. The roof is gable clad in asphalt shingles with exposed, wood rafters under the eaves. There is a one-story, shed-roofed ell appended to the north elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in asbestos siding. The garage features a single-leaf, wood door and a roll-up door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **1023 37th Street**
PROPERTY NAME: House, 1023 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1951
DHR NUMBER (S): 122-5087-1380
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Colonial Revival style and constructed in 1951. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, one-bay porch with an asphalt-shingled, gable roof; wood, turned posts; and a wrought iron balustrade. The porch gable is clad in fishscale-cut, vinyl siding. The primary entrance is centrally located and is comprised of a single-leaf, metal, paneled door with a storm door flanked by 3-light sidelights. The house features individual and paired, 6/6, wood, double-hung sash windows. Non-functional shutters flank the façade windows. There is a single-leaf door with a storm door on the east elevation that is accessed by brick stairs with a wrought iron balustrade. The roof is side gable clad in asphalt shingles. There is a one-story, shed-roofed garage recessed from the façade and appended to the west elevation. The garage features a metal, paneled, roll-up door.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1041 37th Street**
PROPERTY NAME: House, 1041 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1948
DHR NUMBER (S): 122-5087-1385

DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Modern Movement style and constructed in 1948. It incorporates a brick foundation and a wood frame structural system clad in brick veneer. The north façade features a one-story, three-bay porch incorporated under the main roof. The porch features wrought iron posts and balustrade. The primary entrance is centrally located and is comprised of a single-leaf, wood, paneled door with a fan-shaped light and a wrought iron storm door. The house features 6/1, wood, double-hung sash windows with storm windows flanked by non-functional shutters. Wrought iron bars have been applied over the windows. The facade gable is clad in aluminum siding and features a 6/1, wood, double-hung sash window with a storm window. The roof is gable clad in asphalt shingles with wide eaves. The house features an exterior, brick chimney on the east elevation.

- This is a one-story, two-car garage designed in the Modern Movement style and constructed circa 1950. It incorporates wood frame structural system clad in Bricktex siding. The garage features two metal, roll-up doors. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **1045 37th Street**
PROPERTY NAME: House, 1045 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-1387
DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1921. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, three-bay porch incorporated under the main roof. The porch features plain, wood posts and balustrade. The primary entrance is centrally located and is comprised of a single-leaf, metal, paneled door. The house features 6/1, wood, double-hung sash windows with storm windows. There is an oversized, gable-roofed dormer on the façade. The roof is side gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1049 37th Street**
PROPERTY NAME: House, 1049 37th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-1388
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1921. It incorporates a brick foundation and a parged, wood frame structural system. The north façade features a one-story, enclosed porch incorporated under the main roof. The porch is parged and features 6/6, metal double-hung sash windows flanked by fixed, wood windows and parged columns with stylized capitals resting on parged pedestals. The primary entrance is centrally located and is comprised of a single-leaf, metal, paneled door with 15 lights. The

house features 1/1, metal, double-hung sash windows with storm windows. There is a gable-roofed dormer on the façade that features 1/1, metal, double-hung sash windows surmounted by fixed, metal, quarter circle windows; stylized, parged quoins; and exposed, wood rafters under the eaves. The roof is side gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1083 37th Street**
PROPERTY NAME: Store, 1083 37th Street
OTHER NAME (S): New Life Worship Center
CONSTRUCTION DATE: 1949
DHR NUMBER (S): 122-5087-1390
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1949. It incorporates a concrete slab foundation and a concrete block structural system. The north façade features a single-leaf, metal door and fixed, metal windows. Metal, industrial sash windows are featured on the west elevation. Metal awnings surmount the windows on the north end of the west elevation. The building features two blocks setback on the west elevation. There is a single-leaf, metal door on the south elevation. The roof is flat with a parapet coped in metal. There is an interior, brick chimney embedded into the southwest corner wall of the first setback.

CONTRIBUTING (1 - building)

38th Street

PROPERTY ADDRESS: **119 38th Street**
PROPERTY NAME: House, 119 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-1392
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1907. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north facade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a metal awning; wood, Tuscan columns; and an aluminum-clad balustrade. The west end of the porch has been enclosed and is clad in aluminum siding punctuated by metal, double-hung sash windows. The primary entrance is comprised of a single-leaf door. The house features 1/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, squared bay on the west end of the façade that is surmounted by a closed gable. The closed gable features a wood, Queen Anne, double-hung sash window with a storm window. There is a two-story, projecting, squared bay on the west elevation that is surmounted by a closed gable. The closed gable features paired, wood, Queen Anne, double-hung sash windows with storm windows. There is a hip-roofed

dormer on the façade that is clad in wood shingles and features a wood, Queen Anne, double-hung sash window with a storm window. There is an intersecting, closed gable on the east elevation that features a double-hung sash window with a storm window. The roof is hipped-cross-gable clad in slate shingles. The house features two, interior, brick chimneys with corbelled caps on the west elevation. There is a one-story addition appended to the east elevation. The addition incorporates a concrete pier foundation clad in wood lattice and a wood frame structural system clad in aluminum siding. The addition features 1/1, metal, double-hung sash windows and a corrugated metal, shed roof.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1910. It incorporates a brick structural system. The garage features two bays. The roof is shed clad in asphalt shingles.
- This is a one-story garage designed in the Modern Movement style and constructed circa 1945. It incorporates a brick structural system. The north façade is clad in stucco and features two metal, paneled, roll-up doors. The roof is flat with a parapet.

CONTRIBUTING (3 - buildings)

PROPERTY ADDRESS: **205 38th Street**
PROPERTY NAME: House, 205 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1393
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features clustered, wood posts resting on an asbestos-clad balustrade. The primary entrance is comprised of a single-leaf, metal door with a storm door flanked by 5-light sidelights. The house features 1/1, wood, double-hung sash windows with storm windows. There is a shed-roofed dormer on the façade that features 1/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles with brackets under the rakes.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **207 38th Street**
PROPERTY NAME: House, 207 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1394
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features square, wood columns and a plain, wood

balustrade. The primary entrance is comprised of a single-leaf, wood door with multiple lights and a storm door flanked by 5-light sidelights. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a shed-roofed dormer on the façade that features sliding, metal windows. The roof is side gable clad in asphalt shingles with brackets under the rakes.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **209 38th Street**
PROPERTY NAME: House, 209 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1395
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features square, wood, columns and a wood balustrade. The primary entrance is comprised of a single-leaf, wood door with multiple lights and a storm door flanked by 5-light sidelights. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a shed-roofed dormer on the façade that features an enclosed second story porch. The second story porch features an asbestos clad balustrade and vertical board siding punctuated by 1/1, metal, double-hung sash windows. There is a single-leaf, door with a storm door on the east elevation. The roof is side gable clad in asphalt shingles with brackets under the rakes.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1916. It incorporates a wood frame structural system clad in weatherboard. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **213 38th Street**
PROPERTY NAME: House, 213 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1396
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a parged brick foundation and a wood frame structural system clad in wood shingles. The north façade features a two-story porch incorporated under the main roof. The first story porch has two bays and features squared, wood columns and a plain, wood balustrade. The second story porch is enclosed and is clad in wood shingles punctuated by 1/1, wood, double-hung sash windows. The primary entrance is comprised of a single-leaf, wood door with nine lights and a storm door surmounted by a transom. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in slate shingles with exposed, wood rafters under the eaves. This building features an interior, parged brick chimney on the east elevation.

There is a one-story porch incorporated with the building on the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **215 38th Street**
PROPERTY NAME: House, 215 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1397
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The north façade features a two-story porch incorporated under the main roof. The first story porch has two bays and features squared, wood columns and a plain, wood balustrade. The second story porch is enclosed and is clad in wood shingles punctuated by 1/1, wood, double-hung sash windows. The primary entrance is comprised of a single-leaf, wood, paneled door surmounted by a wood panel carved with a sunburst motif. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles with a boxed cornice.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **217 38th Street**
PROPERTY NAME: House, 217 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1398
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in weatherboard. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features clustered, wood posts resting on a weatherboard-clad balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a shed-roofed dormer on the façade that features an enclosed second story porch. The second story porch features a weatherboard-clad clad balustrade and fixed, metal and 1/1, metal double-hung sash windows. The roof is side gable clad in asphalt shingles with brackets under the rakes. The building features an interior, parged brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **219 38th Street**
PROPERTY NAME: House, 219 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918

DHR NUMBER (S): 122-5087-1399
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in weatherboard siding. The north façade features a one-story, enclosed porch incorporated under the main roof. The porch is clad in weatherboard punctuated by metal Jalousie windows and features a metal awning. The primary entrance is comprised of a single-leaf, wood door with a light. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a shed-roofed dormer on the façade that features an enclosed second story porch. The second story porch is clad in weatherboard punctuated by 1/1, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles. The building features an interior, parged brick chimney on the east elevation.

- This is a one-story shed designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in wood.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **223 38th Street**
PROPERTY NAME: House, 223 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1927
DHR NUMBER (S): 122-5087-1400
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1927. It incorporates a parged brick foundation and a wood frame structural system. The first story has been stuccoed and the second story is clad in wood shingles. The north façade features a one-story, one-bay porch with an asphalt-shingled, shed roof; battered, wood piers resting on stuccoed pedestals; and a stuccoed balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a light and a storm door. The house features individual and paired, 1/1, metal, double-hung sash windows. The façade gable features a rectangular-shaped, louvered vent. The roof is cross gable clad in asphalt shingles with exposed, wood rafters under the eaves.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1995. It incorporated a wood frame structural system clad in vinyl siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **317 38th Street**
PROPERTY NAME: House, 317 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1952
DHR NUMBER (S): 122-5087-1404

DESCRIPTION (S):
This is a one-story house designed in the Modern Movement style and constructed in 1952. It incorporates a concrete slab foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, projecting, squared block surmounted by an intersecting, hip roof. The primary entrance is centrally located and is comprised of a single-leaf, metal, paneled door with a storm door accessed by brick stairs with a plain, wood balustrade. The house features 2/2, metal, double-hung sash windows. The roof is hipped clad in asphalt shingles. The house features a central, interior, brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **321 38th Street**
PROPERTY NAME: House, 321 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1950
DHR NUMBER (S): 122-5087-1405
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Modern Movement style and constructed in 1950. It features a Cape Cod form. It incorporates a concrete block foundation and a wood frame structural system clad in vinyl siding. The north façade features a centrally located, one-story, one-bay porch with an asphalt-shingled, gable roof and wrought iron posts and balustrade. The entrance is centrally located and is comprised of a single-leaf door with a wrought iron storm door. The house features 3/1 and 4/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the first story façade windows. There are two, gable-roofed dormers on the façade that features 3/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles. The house features a central, interior, brick chimney. There is a one-story, shed-roofed addition appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **325 38th Street**
PROPERTY NAME: House, 325 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1950
DHR NUMBER (S): 122-5087-1406
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Modern Movement style and constructed in 1950. It features a Cape Cod form. It incorporates a concrete block foundation and a wood frame structural system clad in vinyl siding. The north façade features a centrally located entrance that is comprised of a single-leaf door with a storm door surmounted by a metal awning. The entrance is accessed by brick stairs with a wrought iron balustrade. The house features 1/1, metal, double-hung sash windows. Non-functional shutters flank the first story façade windows. There are two, gable-roofed dormers on the façade that features 1/1, metal, double-hung sash windows. There is a one-story, gable-roofed porch appended to the west elevation. The porch features plain, wood posts and balustrade. The roof is side gable clad in asphalt shingles. The house features a central,

interior, brick chimney.

- This is a one-story shed designed in the Modern Movement style and constructed in 1950. It incorporates a wood frame structural system clad in vinyl siding. The shed features a single-leaf, metal, paneled door. The roof is side gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **329 38th Street**
PROPERTY NAME: House, 329 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1950
DHR NUMBER (S): 122-5087-1407
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Modern Movement style and constructed in 1950. It features a Cape Cod form. It incorporates a parged concrete block foundation and a wood frame structural system clad in vinyl siding. The north façade features a centrally located, one-story, one-bay porch with an asphalt-shingled, gable roof and plain wood posts and balustrade. The entrance is centrally located and is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a storm door. The house features 1/1, metal, double-hung sash windows. Non-functional shutters flank the first story façade windows. There are two gable-roofed dormers on the façade that features 1/1, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles. The house features a central, interior, brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **401 38th Street**
PROPERTY NAME: House, 401 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1950
DHR NUMBER (S): 122-5087-1408
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Modern Movement style and constructed in 1950. It incorporates a parged concrete block foundation and a wood frame structural system clad in vinyl siding. The north façade features one-story, projecting, squared block surmounted by an intersecting gable. The east end of the block features a one-bay porch incorporated under the intersecting gable. The porch features a wrought iron post. The primary entrance is centrally located and is comprised of a single-leaf, metal, paneled door with a storm door. The house features 8/8 and 6/6, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows. The roof is side gable clad in asphalt shingles. The house features a central, interior, brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **407 38th Street**

PROPERTY NAME: House, 407 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1913
DHR NUMBER (S): 122-5087-1409
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1913. It incorporates a stuccoed brick foundation and a wood frame structural system. The first story has been stuccoed and the second story is clad in asphalt shingles. The north façade features a centrally located, one-story, one-bay porch with an asphalt-shingled, hipped roof; squared, wood posts resting on stuccoed brick pedestals; and a plain, wood balustrade. The entrance is centrally located and is comprised of a single-leaf door with a wrought iron storm door surmounted by a 9-light transom and flanked by 5-light sidelights. The house features 6/1 and 12/1, wood, double-hung sash windows. There is a one-story, projecting, canted bay centrally located on the second story façade. There is a shed-roofed dormer on the façade that features a 12-light, wood, casement window. There is a one-story, projecting, canted bay on the first story of the east elevation. The roof is gable over hip clad in asphalt shingles with a wide frieze under the wide eaves.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **413 38th Street**
PROPERTY NAME: House, 413 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-1411
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1915. It incorporates a brick and a wood frame structural system clad in wood shingles. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof with exposed, wood rafters under the eaves; squared, wood piers resting on brick pedestals; and a plain, wood balustrade. The entrance is comprised of a single-leaf door with a storm door. The house features 6/1, wood, double-hung sash windows with storm windows. There is a one-story, projecting, squared oriel on the first story of the west elevation. The roof is gable clad in asbestos shingles with exposed, wood rafters under the eaves and brackets under the rakes. The house features an interior, brick chimney with a corbelled cap on the east elevation. There is a one-story ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **419 38th Street**
PROPERTY NAME: House, 419 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1412
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Queen Anne style and constructed in 1918. It

incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, three-bay porch with an asphalt-shingled, shed roof extending from the main roof; plain, wood posts; and a vinyl-clad balustrade. The entrance is centrally located and is comprised of a single-leaf door with a storm door. The house features 9/1, 3/3 and 2/2, wood, double-hung sash windows with storm windows. There is a two-story, gable-roofed bay on the west end of the façade that features cornice returns on the intersecting gable. The façade gable on the bay features a 4-light, wood, casement window. There is a gable-roofed dormer on the façade that features a 3/3, wood, double-hung sash window and cornice returns. There are two-story, projecting bays on the east and west elevations that are surmounted by Jerkinhead-gable roofs with cornice returns. The roof is deck-on-hip-cross-gable clad in asphalt shingles with a boxed cornice. The house features an exterior, brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **501 38th Street**
PROPERTY NAME: House, 501 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-1413
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1922. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a two-story porch incorporated under a shed roof extending from the main roof. The first story porch features a false, asphalt-shingled, hipped roof; battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The second story porch has been enclosed with vinyl siding punctuated by paired, 3/3, metal, double-hung sash windows. The entrance is comprised of a single-leaf door with storm door flanked by wood paneled sidelights. The house features 1/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows. There is a single-leaf door with a storm door on the east elevation. There is a gable-roofed dormer on the façade that features paired, 1/1, wood, double-hung sash windows with storm windows and wide eaves. The roof is side gable clad in asphalt shingles with brackets under the rakes. The house features an exterior brick chimney on the west elevation.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system clad in vinyl siding. The roof is side gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **503 38th Street**
PROPERTY NAME: House, 503 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1414
DESCRIPTION (S):

This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1917. It incorporates a brick foundation and a brick structural system. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a wide frieze; battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with an 8-light storm door flanked by 6-light sidelights. The house features 9/1, wood, double-hung sash windows with storm windows. There is a one-story, projecting, squared bay on the first story of the east elevation that is surmounted by a hipped roof. There are hip-roofed dormers on the east and west elevations. There is a hip roof dormer on the façade that features paired, 6-light, wood, casement windows. The roof is hipped clad in slate shingles with wide eaves. The house features an exterior, brick chimney on the east elevation and a central interior, metal chimney.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1925. It incorporates a wood frame structural system clad in weatherboard. The garage features double-leaf, wood doors with six lights. The roof is hipped clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **505 38th Street**
PROPERTY NAME: House, 505 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1923
DHR NUMBER (S): 122-5087-1415
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1923. It incorporates a parged brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a two-story porch. The first story porch has two bays and features an asphalt-shingled, gable roof with brackets under the rakes; battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The second story porch has been enclosed with asbestos siding punctuated by 1/1, metal, double-hung sash windows and is surmounted by a composite-tiled, shed roof. The entrance is comprised of a single-leaf, wood, paneled door. The house features individual and paired; 1/1, wood, double-hung sash windows with storm windows. The façade gable features a 3-light, wood, casement window. The roof is Jerkinhead-gable clad in composite tiles with exposed, wood rafters under the eaves. The house features an interior, brick chimney with a corbelled cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **507 38th Street**
PROPERTY NAME: House, 507 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1923
DHR NUMBER (S): 122-5087-1416
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1923. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a two-story

porch. The first story porch has three bays and features an asphalt-shingled, shed roof and plain, wood posts and balustrade. The second story porch has been enclosed with vinyl siding punctuated by metal, sliding windows and is surmounted by an asphalt-shingled, shed roof. The primary entrance is comprised of a single-leaf, wood door with a storm door. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. The façade gable features a 3-light, wood, casement window. The roof is Jerkinhead-gable clad in composite tiles with wide eaves. The house features an interior, parged brick chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **521 38th Street**
PROPERTY NAME: Duplex, 521 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-1417
DESCRIPTION (S):
This is a two-story duplex designed in the Late 19th and Early 20th Century American Movement style and constructed in 1921. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a two-story, one-bay porch with an asphalt-shingled, gable roof with brackets under the rakes; vinyl-clad, two-story piers; and vinyl-clad balustrades. The second story porch has been screened. The porches are accessed by single-leaf door. The primary entrance is located on the east end of the façade and is comprised of a single-leaf door with a storm door surmounted by an asphalt-shingled, pent roof overhang. The primary entrance is accessed by brick stairs with a wrought iron balustrade. The duplex features 6/1, wood, double-hung sash windows with storm windows. There is a two-story, projecting, squared bay on the west elevation. The roof is gable clad in asphalt shingles with brackets under the rakes.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **525 38th Street**
PROPERTY NAME: House, 525 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1418
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a two-story porch incorporated under a shed roof extending from the main roof. The first story porch has two bays and features a false, asphalt-shingled, hipped roof; stuccoed, wood piers; and a plain, wood balustrade. The second story porch has been enclosed with vinyl siding punctuated by sliding, metal windows and features a stuccoed balustrade with stuccoed pedestals. The entrance is comprised of a single-leaf door with storm door flanked by 5-light sidelights. The house features 1/1, metal, double-hung sash windows. There is a gable-roofed dormer on the façade that features paired, 1/1, metal, double-hung sash windows. The roof is side gable

clad in asphalt shingles. The house features an exterior, brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **527 38th Street**
PROPERTY NAME: House, 527 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-1419
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1919. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a two-story porch incorporated under a shed roof extending from the main roof. The first story porch has two bays and features a false, asphalt-shingled, hipped roof; clustered, wood posts resting on brick pedestals; and an aluminum-clad balustrade. The second story porch has been enclosed with aluminum siding punctuated by 1/1, metal, double-hung sash windows. The entrance is comprised of a single-leaf door flanked by wood paneled sidelights. The house features 1/1, metal, double-hung sash windows. There is a gable-roofed dormer on the façade that features paired, 1/1, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles. The house features an exterior, brick chimney on the east elevation, which has been removed.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **531 38th Street**
PROPERTY NAME: House, 531 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1926
DHR NUMBER (S): 122-5087-1420
DESCRIPTION (S):
This is a one-and-one-half-story Bungalow constructed in 1926. It incorporates a brick foundation and a wood frame structural system clad in brick veneer. The façade gable is clad in wood shingles. The north façade features a one-story, one-bay porch incorporated under the main roof. The porch features a metal awning; brick piers; and turned balusters. The entrance is comprised of a single-leaf door with a wrought iron storm door flanked by vinyl-clad sidelights. The house features 1/1, metal, double-hung sash windows with rowlock brick sills. There are two, one-story, projecting, squared bays on the east and west elevations that are surmounted by Jerkinhead-gable roofs. The façade gable features paired, 6-light, wood casement windows. The roof is Jerkinhead-cross-gable clad in slate shingles. The house features an exterior, brick chimney on the west elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1930. It incorporates a wood frame structural system clad in brick veneer. The roof is side gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **539 38th Street**
PROPERTY NAME: House, 539 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1923
DHR NUMBER (S): 122-5087-1421
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1923. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The north façade features a two-story, two-bay porch incorporated under a shed roof extending from the main roof. The first story porch features a false, asphalt-shingled, hipped roof; brick piers and a wood-shingled balustrade. The second story porch features battered, wood piers; and a wood-shingled balustrade. The second story porch is accessed by a single-leaf, wood door with a light and a storm door. The primary entrance is comprised of a single-leaf, wood, paneled door with a storm door flanked by wood paneled sidelights. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. There is a single-leaf door on the west elevation. There is a gable-roofed dormer on the façade that features paired, 6/1, wood, double-hung sash windows and exposed, wood rafters under the eaves. The roof is side gable clad in slate shingles. The house features an exterior, brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **541 38th Street**
PROPERTY NAME: House, 541 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1422
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a two-story porch incorporated under a shed roof extending from the main roof. The first story porch has two bays and features a false, asphalt-shingled, hipped roof; square, wood piers resting on brick pedestals; and an plain, wood balustrade. The second story porch has been enclosed with vinyl siding punctuated by screens and features battered wood piers and a vinyl-clad balustrade. The primary entrance is comprised of a single-leaf, wood door with a light and a storm door flanked by 3-light and wood-paneled sidelights. The house features 1/1, metal, double-hung sash windows. There is a single-leaf door on the east elevation. There is a gable-roofed dormer on the façade that features paired, 1/1, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles. The house features an exterior, brick chimney on the west elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in vinyl siding. The garage features replacement, double-leaf, wood doors. The roof is hipped clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **609 38th Street**
PROPERTY NAME: House, 609 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1423
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1920. It incorporates a stuccoed brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a two-story, two-bay porch incorporated under a shed roof extending from the main roof. The first story porch features a false, asphalt-shingled, hipped roof; clustered, square, wood piers resting on stuccoed brick pedestals; and an plain, wood balustrade. The second story porch features square, wood piers and a vinyl-clad balustrade. The second story porch is accessed by a single-leaf door with a storm door. The primary entrance is comprised of a single-leaf, wood door with six lights surmounted by a 5-light transom and flanked 2-light and wood-paneled sidelights. The house features individual and paired, 1/1, metal, double-hung sash windows. There is a gable-roofed dormer on the façade that features paired, 1/1, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles. The house features an interior, parged brick chimney on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **611 38th Street**
PROPERTY NAME: House, 611 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1424
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a two-story porch incorporated under a shed roof extending from the main roof. The first story porch has two bays and features a false, asphalt-shingled, hipped roof; battered, wood piers resting on brick pedestals; and a vinyl-clad balustrade. The second story porch has been screened and features square, wood piers; and a vinyl-clad balustrade. The second story porch is accessed by a single-leaf door with a storm door. The primary entrance is comprised of a single-leaf, wood door with a light and a wrought iron storm door surmounted by a transom and flanked by 1-light and wood-paneled sidelights. The house features individual and paired, 9/1, wood, double-hung sash windows with storm windows. There is a single-leaf door with a storm door on the east elevation. There is a gable-roofed dormer on the façade that features paired, 1/1, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles. The house features an interior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **615 38th Street**
PROPERTY NAME: House, 615 38th Street
OTHER NAME (S):

CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1425
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system. The first story is clad in vinyl siding and the second story is clad in wood shingles. The north façade features a one-story, one-bay porch with an asphalt-shingled, gable roof; a metal awning; battered, wood piers resting on brick pedestals; and a vinyl-clad balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door. The house features 1/1, wood and metal, double-hung sash windows. There is a two-story, projecting, canted bay on the east end of the façade that is surmounted by a closed gable. The closed gable features a 1-light, wood, casement window. There is a hip-roofed dormer on the west elevation. The roof is side gable clad in asphalt shingles. The house features an exterior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **617 38th Street**
PROPERTY NAME: House, 617 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1426
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a two-story porch incorporated under a shed roof extending from the main roof. The first story porch has one bay and features a false, asphalt-shingled, hipped roof; battered, wood piers resting on brick pedestals; and a vinyl-clad balustrade. The second story porch has been enclosed in vinyl siding punctuated by 1/1, metal, double-hung sash windows. The primary entrance is comprised of a single-leaf, wood door with storm door flanked by 5-light sidelights. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a single-leaf door with a storm door on the west elevation. There is a gable-roofed dormer on the façade that features paired, 1/1, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles. The house features an interior, parged brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **619 38th Street**
PROPERTY NAME: House, 619 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1427
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system. The first story

façade is clad in applied wood panels and the side elevations are clad in weatherboard and vinyl siding. The north façade features a one-story porch with an asphalt-shingled, gable roof; a metal awning; battered, wood piers resting on brick pedestals; and a wood-clad balustrade. The porch façade gable is clad in wood shingles. The primary entrance is comprised of a single-leaf door with a storm door. The house features individual and paired, 1/1, metal, double-hung sash windows. There is an oversized, shed-roofed dormer on the façade that is clad in weatherboard and features a second story porch enclosed in asbestos siding. The second story porch features a 1/1, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles. There is a one-story, shed-roofed ell appended to the south elevation.

- This is a one-story shed designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1930. It incorporates a wood frame structural system clad in vertical board. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **621 38th Street**
PROPERTY NAME: House, 621 38th Street
OTHER NAME (S): Duplex, 621 38th Street
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-1428
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1922. It incorporates a brick foundation and a wood frame structural system. The first story is clad in brick veneer and the second story is clad in vinyl siding. The north façade features a two-story, three-bay porch with an asphalt-shingled, hipped roof. The second story porch features squared, wood piers resting on brick pedestals and the first story porch features brick piers with limestone capitals resting on brick pedestals with limestone caps and plain, wood balustrades. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light surmounted by a transom. The second story porch is accessed by a centrally located single-leaf door with a storm door surmounted by a transom. The house features 1/1, metal, double-hung sash windows with storm windows. The first story windows features rowlock brick sills and round arch, brick lintels. The façade gable features paired, 1/1, wood, double-hung sash windows. There is a one-story, projecting squared oriel on the second story of the west elevation. The roof is gable clad in asphalt shingles with a wide frieze under the eaves. This house has been converted into a duplex.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **623 38th Street**
PROPERTY NAME: House, 623 38th Street
OTHER NAME (S): Duplex, 623 38th Street
CONSTRUCTION DATE: 1941
DHR NUMBER (S): 122-5087-1429
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1941. It incorporates a brick

foundation and a wood frame structural system clad in wood shingles. The north façade features a one-story, one-bay porch with an asphalt-shingled, gable roof and wrought iron posts. The primary entrance is comprised of a single-leaf door with a storm door. The house features 6/6 and 8/8, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows. The roof is side gable clad in asbestos shingles with a dentiled cornice on the façade. There is a two-story, hip-roofed addition appended to the east elevation. The second story of the addition features an enclosed porch clad in corrugated metal and punctuated by 1/1, metal double-hung sash windows.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1945. It incorporates a wood frame structural system clad in pressure treated lumber. The garage features a metal, roll-up door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **629 38th Street**
PROPERTY NAME: House, 629 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1430
DESCRIPTION (S):
This is a two-story house designed in the Craftsman and constructed in 1920.It incorporates a brick foundation and a wood frame structural system. The first story is clad in brick veneer and the second story is clad in vinyl siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features battered, wood piers resting on brick pedestals and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, door with a wrought iron storm door surmounted by a jack arch, 5-light transom and flanked by wood-paneled sidelights. The house features individual and tripartite, 8/8, 6/6, and 4/4, wood, double-hung sash windows with storm windows. The first story windows feature limestone sills and round arch brick lintels. There is a single-leaf door with a storm door on the east elevation. There is an oversized, gable-roofed dormer on the façade that features brackets under the rakes. The roof is side gable clad in asphalt shingles with brackets under the rakes. The house features an interior, brick chimney with a corbelled cap on the west elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1930. It incorporates a wood frame structural system clad in vinyl siding. The garage features double-leaf, metal doors. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **701 38th Street**
PROPERTY NAME: House, 701 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-1433

DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1922. It incorporates a parged brick foundation and a wood frame structural system clad in wood shingles. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood door with a light surmounted by a transom and flanked by sidelights with wood panels. The house features individual and tripartite, 9/1 and 12/1, wood, double-hung sash windows with storm windows. There is a shed-roofed dormer on the façade that features 1/1, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles with exposed, wood rafters under the eaves.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1950. It incorporates a concrete block structural system. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **703 38th Street**
PROPERTY NAME: House, 703 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-1434
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1922. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features wood piers resting on brick pedestals and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood door surmounted by a transom and flanked by sidelights with wood panels. The house features individual and tripartite, 9/1 and 12/1, wood, double-hung sash windows with storm windows. There is a shed-roofed dormer on the façade that features fixed, metal windows flanked by non-functional shutters. The roof is side gable clad in asphalt shingles with exposed, wood rafters under the eaves.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **705 38th Street**
PROPERTY NAME: House, 705 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-1435
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1921. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The north façade features a one-story, one-bay porch with an asphalt-shingled, gable roof; a metal awning; brick piers; and a plain, wood balustrade. There is a wood, handicapped ramp accessing the porch on the north façade. The primary entrance is comprised of a single-leaf, wood door with a multiple lights and a storm door. The house features individual and tripartite,

1/1, wood, double-hung sash windows with storm windows. A metal awnings surmounts the second story façade windows and the windows of the first story of the west elevation. There is a one-story, projecting, squared bay on the west elevation that is surmounted by a shed roof. The roof is gable clad in asphalt shingles with wide eaves. The house features an exterior, brick chimney with a corbelled cap on the west elevation.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1925. It is wood frame construction and features an asphalt-shingled roof.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **711 38th Street**
PROPERTY NAME: House, 711 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1436
DESCRIPTION (S):
This is a one-story house designed in the Colonial Revival style and constructed in 1920. It incorporates a concrete block foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features a brick foundation; square, wood columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a storm door. The house features individual and tripartite, 1/1, metal, double-hung sash windows. There is as single-leaf door on the east elevation that is accessed by brick stairs with wrought iron balustrade. The roof is Jerkinhead-gable clad in asphalt shingles with brackets under the rakes on the façade.

- There is a one-story shed designed in the Modern Movement style and constructed circa 1995. It incorporates a wood frame structural system clad in vinyl siding. The garage features a single-leaf, metal, 6-panel door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **719 38th Street**
PROPERTY NAME: House, 719 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-1437
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1912. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof and wrought iron posts and balustrade. The primary entrance is comprised of a single-leaf, wood door with a light and a storm door surmounted by a transom. The house features 2/2, wood, double-hung sash windows with storm windows. Non-functional shutters flank the second

story façade windows. The façade gable is closed and features a Palladian window of a 1/1, wood, double-hung sash window with a rounded arch upper sash flanked by fixed, wood, diamond-paned windows. There are intersecting, closed gables at the south end of the east and west elevations. The roof is cross-gable clad in asphalt shingles. The house features two interior, brick chimneys with corbelled caps on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **727 38th Street**
PROPERTY NAME: Apartment Building, 727 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1953
DHR NUMBER (S): 122-5087-1438
DESCRIPTION (S):
This is a two-story apartment building designed in the Colonial Revival style and constructed in 1953. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in brick veneer. The building features a two-story porch with an asphalt-shingled, gable roof on the east end of the north facade. The first story porch has three bay and features wood, Tuscan columns and a closed balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a fan-shaped light. The second story porch has two bays and features wood, Tuscan columns and a plain, wood balustrade. The second story porch is accessed by a single-leaf, wood, paneled door with a fan-shaped light. The building features individual and paired, 2/2, metal, double-hung sash windows with rowlock brick sills. The roof is gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **731 38th Street**
PROPERTY NAME: Apartment Building, 731 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-1439
DESCRIPTION (S):
This is a two-story apartment building designed in the Late 19th and Early 20th Century American Movement and constructed in 1921. It incorporates a brick foundation and 7-course, American bond brick structural system. The north façade features two, two-story, one-bay porches flanking a central entrance block. The porches and the entrance share a common, asphalt shingled, hipped roof. The porches feature two-story brick piers and plain, wood balustrades. The porches are accessed by single-leaf, wood, 9-light, doors. The primary entrance is centrally located and is comprised of a single-leaf door surmounted by an asphalt-shingled, gable roof supported by wood posts. The building features 1/1, metal, double-hung sash windows with rowlock brick sills. The roof is flat with a stepped parapet coped in a rowlock brick course. The building features a corbelled cornice.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **735 38th Street**
PROPERTY NAME: Apartment Building, 735 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-0110 122-1203
DESCRIPTION (S):
This is a two-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1921. It incorporates a brick foundation and a 7-course, American bond brick structural system. The façade is clad in brick veneer. The north façade features two, two-story, one-bay porches flanking a central, projecting, two-story entrance block. The porches and the entrance block share a slate shingled, hipped roof. The porches feature two-story brick piers and plain, wood balustrades. The porches are accessed by single-leaf, wood doors with nine lights. The primary entrance is centrally located and is comprised of a single-leaf door surmounted by a projecting, asphalt-shingled, gable-roofed overhang support by wood, turned posts. The building features 1/1, metal, double-hung sash windows with rowlock brick sills. The roof is flat with a stepped parapet. The building features a corbelled cornice on the façade. The building features interior, brick chimneys embedded in the east and west elevation walls.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **739 38th Street**
PROPERTY NAME: Apartment Building, 739 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-1440
DESCRIPTION (S):
This is a two-story apartment building designed in the Late 19th and Early 20th Century American Movement and constructed in 1921. It incorporates a brick foundation and 7-course, American bond brick structural system. The north façade features two, two-story, one-bay porches flanking a central entrance block. The porches and the entrance share a common, asphalt shingled, hipped roof. The porches feature two-story brick piers and plain, wood balustrades. The porches are accessed by single-leaf, wood, paneled doors. The primary entrance is centrally located and is comprised of a single-leaf, metal, paneled door flanked by sidelights and surmounted by an asphalt-shingled, pent roof supported by wood brackets. The building features 1/1, wood, double-hung sash windows with rowlock brick sills and storm windows. The roof is flat with a stepped parapet coped in a rowlock brick course. The building features a corbelled cornice.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **811 38th Street**
PROPERTY NAME: House, 811 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1441

DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features square, wood columns; wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood door with multiple lights and a storm door. The house features 6/1, wood, double-hung sash windows with storm windows. There is a shed-roofed dormer on the façade that features a tripartite, 6/1, wood, double-hung sash windows with storm windows. There is a one-story, projecting, squared oriel on the west elevation that is surmounted by a shed roof. The roof is side gable clad in asphalt shingles with brackets under the rakes. The house features an interior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **813 38th Street**
PROPERTY NAME: House, 813 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-1442
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1922. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, two-bay porch with an asphalt-shingled, gable roof with brackets under the rakes; a plain, wood post; clustered, wood posts resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door. The house features 6/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the first story façade windows. An asphalt-shingled, pent roof surmounts the second story facade windows. The façade gable features a 6-light, wood, casement window with a storm window and brackets under the rakes. There is a one-story, projecting, squared bay on the west elevation that is surmounted by a shed roof. The roof is gable clad in asphalt shingles with exposed, wood rafters under the eaves. The house features an exterior, brick chimney on the west elevation that has been parged above the roofline. There is a one-story, shed-roofed ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **815 38th Street**
PROPERTY NAME: House, 815 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1443
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The north façade features a one-story, one-bay porch incorporated under the main roof. The porch features battered, wood piers resting on brick

pedestals and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a fan-shaped light and a storm door. The house features individual and paired, 1/1, metal, double-hung sash windows with storm windows. There is a gable-roofed dormer on the west end of the façade that features a tripartite, 1/1, wood, double-hung sash window with storm windows and brackets under the rakes. There is a one-story, squared, projecting bay on the west elevation that is surmounted by a shed roof. The roof is side gable clad in asphalt shingles with brackets under the rakes. The house features an exterior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **819 38th Street**
PROPERTY NAME: Apartment Building, 819 38th Street
OTHER NAME (S): Picardy Apartments
CONSTRUCTION DATE: circa 1915
DHR NUMBER (S): 122-5087-1444
DESCRIPTION (S):
This is a three-story apartment building designed in the Late 19th and Early 20th Century American Movement and constructed circa 1915. It incorporates a brick foundation and an American bond brick structural system clad in brick veneer. The north façade features two, three-story, one-bay porches flanking a central entrance block. The porches and the entrance share a common, asphalt shingled, hipped roof. The porches feature three-story brick piers and plain, wood balustrades. The porches are accessed by single-leaf doors. The primary entrance is centrally located and has been boarded. The building features 1/1, metal, double-hung sash windows with rowlock brick sills. The roof is flat with a stepped parapet coped in a rowlock brick course. The building features a corbelled cornice.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **829 38th Street**
PROPERTY NAME: House, 829 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-1445
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Queen Anne style and constructed in 1910. It incorporates a parged brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, three-bay porch incorporated under the main roof. The porch features square, wood columns and a wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light surmounted by a transom. The house features 1/1, metal, double-hung sash windows. The northeast corner of the house is canted. There is an intersecting gable on the east end of the façade that is clad in wood shingles and features a 1/1, wood, double-hung sash window. There is an intersecting gable on the east elevation that is clad in wood shingles and features a 1/1, wood, double-hung sash window. The roof is hipped clad in slate shingles. The house features a central interior, brick chimney with a corbelled cap.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **831 38th Street**
PROPERTY NAME: House, 831 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1925
DHR NUMBER (S): 122-5087-1446
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1925. It incorporates a brick foundation and a wood frame structural system. The first story is clad in vinyl siding and the second story is clad in wood shingles. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof with exposed, wood rafters under the eaves; wood piers on brick pedestals; and a vinyl-clad balustrade. The porch has been screened and features a single-leaf, storm door. The primary entrance is comprised of a single-leaf, wood door with a light. The house features multiple/1, wood, double-hung sash windows with storm windows. There is a single-leaf door on the west elevation that is surmounted by a shed roof. The roof is gable clad in asphalt shingles.

- This is a one-story garage that is designed in the Modern Movement style and was constructed circa 2000. It incorporates a wood frame structural system and a flat roof.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **835 38th Street**
PROPERTY NAME: House, 835 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1447
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The north façade features a one-story, enclosed porch with an asphalt-shingled, shed roof. The porch is clad in vinyl siding punctuated by 1/1, vinyl, double-hung sash windows. The primary entrance is comprised of a single-leaf, wood door with a light and a storm door. The house features individual and tripartite, 1/1, wood, double-hung sash windows with storm windows. Non-functional shutter flank the second story façade and west elevation windows. There is a one-story, projecting, squared oriel on the second story of the west elevation that is surmounted by an intersecting gable. The roof is gable clad in asphalt shingles with wide eaves. There is a one-story, shed-roofed ell appended to the south elevation.

- This is a one-story shed that is designed in the Modern Movement style and was constructed circa 1945. It incorporates a wood frame structural system clad in vinyl siding. The roof is shed clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **855 38th Street**
PROPERTY NAME: Duplex, 855 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1949
DHR NUMBER (S): 122-5087-1451
DESCRIPTION (S):
This is a two-story duplex designed in the Modern Movement style and constructed in 1949. It incorporates a concrete block foundation and a wood frame structural system clad in asbestos siding. The north facade features a single-leaf, metal, paneled door with a fan-shaped light flanked by 3-light sidelights and surmounted by an asphalt-shingled, pent roof overhang supported by brackets. The door is accessed by parged brick stairs. There is a single-leaf, metal, paneled door with a fan-shaped light on the east elevation that is accessed by wood stairs. The duplex features 6/6, metal, double-hung sash windows. Non-functional shutters flank the façade windows. The roof is gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **859 38th Street**
PROPERTY NAME: House, 859 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1452
DESCRIPTION (S):
This is a one-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north façade features a one-story, two-bay porch incorporated under the main roof. The porch features wrought iron posts and balustrade. The primary entrance is comprised of a single-leaf, wood door with six lights and a storm door surmounted by a transom. The house features 6/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows. The roof is hipped clad in slate shingles. The house features an interior, parged brick chimney on the west elevation. There is an interior, brick chimney on the south elevation. There is a one-story, shed-roofed ell appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **863 38th Street**
PROPERTY NAME: House, 863 38th Street
OTHER NAME (S):
CONSTRUCTION DATE: 1925
DHR NUMBER (S): 122-5087-1453
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1925. It incorporates

a brick foundation and a wood frame structural system clad in wood shingles. The north façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof and wrought iron posts and balustrade. The primary entrance is comprised of a single-leaf, wood door with a storm door. The house features 2/2, wood, double-hung sash windows with storm windows. There is a two-story, projecting, squared block on the west end of the façade that is surmounted by an intersecting hipped roof. There is a hip-roofed dormer on the façade that is clad in aluminum siding. The dormer features a 4-light, wood, casement window. The roof is hipped clad in asphalt shingles with a wide frieze. The house features a central, interior, parged brick chimney with a corbelled cap.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1063 38th Street**
PROPERTY NAME: Manufacturing Facility, 1063 38th Street
OTHER NAME (S): Dominion Auto Electrical Sales and Service/Dominion Computers /High's Ice Cream Corporation
CONSTRUCTION DATE: circa 1950
DHR NUMBER (S): 122-5087-1467
DESCRIPTION (S):
This is a one-story manufacturing facility designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1950. It incorporates a concrete slab foundation and a concrete block structural system clad in brick veneer. The north façade features a single-leaf, metal and plate glass door recessed from the façade and surmounted by a metal overhang. The storefront features fixed, metal, plate glass windows with rowlock brick sills. The building features metal, industrial sash windows with rowlock brick sills on the west elevation. The window openings on the east end of the façade have been filled. There are two, rectangular-shaped, metal louvered vents on the façade. The roof is flat with a parapet wall dividing the north and south portions of the building. The south end of the building features a gable-roofed warehouse with two, roll-up doors. There is a one-story, parged concrete block garage appended to the east elevation that features a metal, roll-up door. The south elevation features an interior, brick chimney on the southeast corner.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **1065 38th Street**
PROPERTY NAME: Store, 1065 38th Street
OTHER NAME (S): Auto Body and Repair
CONSTRUCTION DATE: 1947
DHR NUMBER (S): 122-5087-1468
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1947. It incorporates a concrete slab foundation and a concrete block structural system that has been parged. The primary entrance is centrally located on the north façade and is comprised of a single-leaf door with a wrought iron storm door. The building features metal, industrial sash windows. The roof is flat with a stepped parapet.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1970. It incorporates a frame structural system clad in corrugated metal. The roof is gable clad in asphalt singles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

Broadway Street

PROPERTY ADDRESS: **203 Broadway Street**
PROPERTY NAME: Pump Station, 203 Broadway Street
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0111 122-0747
DESCRIPTION (S):
This is a one-story pump station designed in the Colonial Revival style and constructed in 1910. It incorporates a brick foundation and a brick structural system. The north façade features a single-leaf, wood door framed by a Classical door surround. The door surround features pilasters and a broken pediment. A round medallion featuring the City of Norfolk seal fills the broken pediment opening. The building features boarded window openings with parged sills. Some of the windows are surmounted by brick flat arches and feature articulated keystones. There is a round-arch, boarded window opening on the east elevation that features an articulated keystone. The west elevation features an exterior, brick chimney. The roof is gable clad in asphalt shingled with a wide frieze on the north and south elevations and cornice returns on the east and west elevations. There are low brick walls extending from the building on the east and west elevations.
CONTRIBUTING (1 - building)

Church Street

PROPERTY ADDRESS: **2413 Church Street**
PROPERTY NAME: Manufacturing Facility, 2413 Church Street
OTHER NAME (S): Snow King Inc., Masonry Contractor
CONSTRUCTION DATE: 1950
DHR NUMBER (S): 122-5087-1471
DESCRIPTION (S):
This is a one-story manufacturing facility designed in the Modern Movement style and constructed in 1950. It incorporates a concrete slab foundation and a concrete block structural system clad in brick veneer. The south façade features a single-leaf, metal door and fixed, metal windows with rowlock brick sills. There are industrial, metal, double-hung sash windows on the east elevation. The roof is flat with a parapet coped in metal.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2421 Church Street**
PROPERTY NAME: Manufacturing Facility, 2421 Church Street
OTHER NAME (S): F. H. Gaskins and Co., Inc.
CONSTRUCTION DATE: 1955
DHR NUMBER (S): 122-5087-0112 122-0819
DESCRIPTION (S):
This is a one-story manufacturing facility designed in the Modern Movement style and constructed in 1955. It incorporates a concrete slab foundation and concrete block structural system. The east façade is clad in brick veneer. The east façade features double-leaf, plate glass and metal doors surmounted by a transom. The building features metal, plate glass windows. Some of the façade windows have been filled with brick. There is a brick-walled flowerbed below the window openings on the north end of the façade and northeast corner. A projecting, metal, streamlined overhang that extends to the north elevation surmounts the east façade. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

Colley Avenue

PROPERTY ADDRESS: **2300 Colley Avenue**
PROPERTY NAME: Warehouse, 2300 Colley Avenue
OTHER NAME (S): Tidewater Restaurant Service
CONSTRUCTION DATE: 1940
DHR NUMBER (S): 122-5087-1473
DESCRIPTION (S):
This is a one-story warehouse designed in the Modern Movement style and constructed in 1940. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The west façade features two single-leaf doors. The south entrance features a storm door. There are metal, roll-up doors on the north and south ends of the west facade. The warehouse features 8/8, wood, double-hung sash windows with storm windows. There is a metal, roll-up door on the south elevation. The roof is side gable clad in asphalt shingles.

- This is a one-story warehouse designed in the Modern Movement style and constructed in 1940. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The west façade features three metal, roll-up doors. The warehouse features paired, 8/8, wood, double-hung sash windows with storm windows. There is a one-story, gable-roofed ell appended to the north elevation that features a single-leaf, metal, paneled door. The roof is side gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **2400 Colley Avenue**

PROPERTY NAME: Warehouse, 2400 Colley Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1932
DHR NUMBER (S): 122-5087-1474
DESCRIPTION (S):
This is a two-story warehouse designed in the Late 19th and Early 20th Century American Movement style and constructed in 1932. It incorporates a brick foundation and a 6-course, American bond brick structural system. The west elevation features a centrally located, metal, roll-up door. The window and single-leaf door openings have been filled with concrete block. The south elevation features a centrally located, metal, roll-up door. The roof is flat with a stepped parapet coped in a rowlock brick course. The building features an interior, brick chimney with corbelled cap embedded in the north elevation wall.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2406 Colley Avenue**
PROPERTY NAME: Warehouse, 2406 Colley Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1928
DHR NUMBER (S): 122-5087-1475
DESCRIPTION (S):
This is one-story warehouse designed in the Late 19th and Early 20th Century American Movement style and constructed in 1928. The building occupies an L-shaped footprint on the property. It incorporates a concrete slab foundation and a concrete block structural system that has been parged. The west façade features a single-leaf, plate glass and metal door. The building features 1/1, metal, double-hung sash windows with rowlock brick sills. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2500 Colley Avenue**
PROPERTY NAME: Store, 2500 Colley Avenue
OTHER NAME (S): Velvet 25
CONSTRUCTION DATE: 1948
DHR NUMBER (S): 122-5087-1476
DESCRIPTION (S):
This is one-story store designed in the Art Deco style and constructed in 1948. It incorporates a concrete slab foundation and a concrete block structural system. The south and west elevations of the building are clad in brick veneer. The southwest corner is rounded and contains the primary entrance. The entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light surmounted by a boarded transom. There are three, plate glass window openings on the south elevation adjacent to the primary entrance. At the east end of the south elevation there are three boarded window openings. The roof is flat with a parapet coped in stone.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2506 Colley Avenue**
PROPERTY NAME: Warehouse, 2506 Colley Avenue
OTHER NAME (S): Arcon
CONSTRUCTION DATE: 1948
DHR NUMBER (S): 122-5087-1477
DESCRIPTION (S):
This is a one-story warehouse designed in the Modern Movement style and constructed in 1948. It incorporates a concrete slab foundation and concrete block structural system that has been parged. The roof is flat with a parapet coped in metal. There is a one-story, flat-roofed ell appended to the south elevation. This building is appended to 2514 Colley Avenue (DHR# 122-5087-1478) by a two-story hyphen on the east end of the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2514 Colley Avenue**
PROPERTY NAME: Office Building, 2514 Colley Avenue
OTHER NAME (S): Arcon
CONSTRUCTION DATE: 1983
DHR NUMBER (S): 122-5087-1478
DESCRIPTION (S):
This is a two-story office building designed in the Modern Movement style and constructed in 1983. It incorporates a concrete slab foundation and concrete block structural system that has been parged. This building is appended to 2506 Colley Avenue (DHR# 122-5087-1477) by a hyphen on the south end of the west elevation. The hyphen is a two-story, projecting, squared block with a flat roof and a projecting, flat-roofed overhang. The primary entrance is located on the hyphen. The hyphen features a single-leaf door and a garage bay. The building features fixed, metal windows on the second story. There is a fixed, metal window with metal bars on the first story of the west elevation. The roof is flat with a parapet coped in metal.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2515 Colley Avenue**
PROPERTY NAME: Store, 2515 Colley Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1950
DHR NUMBER (S): 122-5087-1479
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1950. It incorporates a concrete slab foundation and a concrete block structural system that has been parged. The south façade features a double-leaf, plate glass and metal door surmounted by a transom and flanked by plate glass, metal, storefront windows. An awning surmounts the storefront on the south façade. The building features plate glass and metal, storefront windows surmounted by awnings. The building features metal, rectangular, louvered vents on the south façade and the north elevation. The roof is flat with a parapet. The building features a cornice at the

roofline.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2601 Colley Avenue**
PROPERTY NAME: Industrial Storage, 2601 Colley Avenue
OTHER NAME (S): American Sheet Metal
CONSTRUCTION DATE: 1947
DHR NUMBER (S): 122-5087-1480
DESCRIPTION (S):
This is a one-story industrial storage building designed in the Modern Movement style and constructed in 1947. It incorporates a concrete slab foundation and a concrete block structural system. The primary entrance is a single-leaf, metal door on the east façade. The roof is flat with a parapet.

- This is a one-story industrial storage structure designed in the Modern Movement style and constructed circa 1950. It incorporates an open, wood frame structural system. The roof is side gable clad in corrugated metal.
- This is a one-story industrial storage building designed in the Modern Movement style and constructed in 1970. It incorporates a concrete slab foundation and a concrete block structural system. The east façade features a single-leaf, metal door and fixed, metal, industrial sash windows. The roof is flat with a parapet coped in metal.
- This is a one-story shed designed in the Modern Movement style and constructed in 1960. It incorporates a concrete slab foundation and a metal frame structural system clad in corrugated metal. The roof is flat and is clad in corrugated metal.
- This is a one-story warehouse designed in the Modern Movement style and constructed in 1980. It incorporates a concrete slab foundation and a metal frame structural system clad in corrugated metal. There is a double-leaf, metal door on the north elevation. The side gable clad in corrugated metal.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (3 - buildings)
CONTRIBUTING (1 - structure)

PROPERTY ADDRESS: **2618 Colley Avenue**
PROPERTY NAME: Store, 2618 Colley Avenue
OTHER NAME (S): Conte's
CONSTRUCTION DATE: 1945
DHR NUMBER (S): 122-5087-1482
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1945. It incorporates a concrete slab foundation and a concrete block structural system clad in brick veneer. The west façade features two double-leaf, plate glass and metal doors surmounted by cloth awnings. The north door is flanked on the north by a sidelight. The building features fixed, plate glass and metal, storefront windows surmounted by cloth

awnings. The roof is flat with a parapet coped in metal. The north portion of the building exhibits a taller roofline than the south portion of the building.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2708 Colley Avenue**
PROPERTY NAME: Store, 2708 Colley Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1938
DHR NUMBER (S): 122-5087-1483
DESCRIPTION (S):
This is a one-story store designed in the Late 19th and Early 20th Century American Movement style and constructed in 1938. It incorporates a concrete slab foundation and a brick structural system clad in brick veneer. The west façade features four bays divided by brick piers. The bays represent original storefronts that have been filled with concrete block. Clerestory ribbon windows remain above the concrete block. The north bay features a metal, roll-up door. The central bay features a single-leaf, metal door and metal, storefront windows. The south bay features a single-leaf door opening that has been filled. The storefront windows on the west façade and window openings on the north elevation have been filled with concrete block. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2713 Colley Avenue**
PROPERTY NAME: Manufacturing Facility, 2713 Colley Avenue
OTHER NAME (S): American Sheet Metal Corporation
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-0113 122-0909
DESCRIPTION (S):
This is a one-story manufacturing facility designed in the Late 19th and Early 20th Century American Movement style and constructed in 1921. It incorporates a concrete slab foundation and wood frame structural system clad in pressed metal. There is a centrally located, gable-roof entrance block on the east facade. The primary entrance is centrally located and is comprised of a single-leaf door. A cornice and a wide frieze surmounts the entrance. The building features 6/6, wood, double-hung sash windows with storm windows; metal, sliding windows; and metal, awning windows. The north elevation is clad in corrugated metal and features boarded window openings. A garage clad in metal with a roll-up, metal door has been added at the northeast corner. There are circa 1970, concrete block ells appended to the south elevation at the east and west corners. The east ell features metal, double-hung sash windows. The west ell features overhead, roll-up doors on the east elevation. The addition roofs are gable and flat clad in metal. The main roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2716 Colley Avenue**

PROPERTY NAME: Store, 2716 Colley Avenue
OTHER NAME (S): Jayen/Pat's Barber Shop
CONSTRUCTION DATE: 1938
DHR NUMBER (S): 122-5087-1484
DESCRIPTION (S):
This is a one-story store designed in the Late 19th and Early 20th Century American Movement style and constructed in 1938. It incorporates a concrete slab foundation and a concrete structural system clad corrugated metal. The west façade features six bays divided by metal-clad piers. The bays represent original storefronts that have been filled with concrete block. The south bay features a metal, roll-up door. The adjacent bay features a single-leaf, metal door with fifteen lights surmounted by a cloth awning. The four northernmost bays have been filled with rusticated concrete block. The building features fixed, wood clerestory windows. The north east corner is canted and contains a storefront entrance. The entrance is comprised of a single-leaf door opening surmounted by a transom and flanked by plate glass, storefront windows and metal-clad window openings. The storefront entrance is surmounted by corrugated metal. The west end of the north elevation is clad in vinyl siding. The east elevation features four, secondary entrances comprised of single-leaf, wood and metal doors. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2800 Colley Avenue**
PROPERTY NAME: Shopping Center, 2800 Colley Avenue
OTHER NAME (S): Gad Camp/Christ the Life Fellowship Church
CONSTRUCTION DATE: 1946
DHR NUMBER (S): 122-5087-1485
DESCRIPTION (S):
This is a one-story shopping center designed in the Modern Movement style and constructed in 1946. It occupies an L-shaped footprint on the property. It incorporates a brick foundation and a brick structural system clad in brick veneer. The southeast wing of the building features a canted southwest corner that contains a storefront entrance. The entrance is comprised of a single-leaf, metal door flanked by vinyl-clad storefront window openings. There is a single-leaf leaf door surmounted by a boarded transom on the south elevation of the southeast wing. There is a storefront entrance on the west elevation of the southeast wing that is comprised of a single-leaf, metal door flanked by vinyl-clad storefront windows openings. The northwest wing features a canted storefront on the east end. The storefront is comprised of a single-leaf, metal door with a storm door flanked on the west by plate glass storefront windows. There is a storefront on the west end of the north elevation that is comprised of a single-leaf, wood door flanked by plate glass, storefront windows on the west. The central storefront on the north elevation of the northwest wind has been filled. There is a one-story, projecting, canted oriel on the west elevation of the northwest wing that is surmounted by a standing-seam metal, flared hipped roof. The main roof is flat with a parapet coped in a rowlock brick course. The southeast wing exhibits a taller roofline than the northwest wing. The building features a corbelled cornice.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2805 Colley Avenue**
PROPERTY NAME: Apartment Building, 2805 Colley Avenue
OTHER NAME (S): Colley Manor
CONSTRUCTION DATE: 1987
DHR NUMBER (S): 122-5087-1486
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1987. It incorporates a concrete slab foundation and a wood frame structural system clad in brick veneer. The south façade features twenty-four entrances comprised of single-leaf, metal doors. The second story entrances are accessed a wood stair appended to the second story façade. The building features 1/1, metal, double-hung sash windows with rowlock brick sills. The roof is side gable clad in asphalt shingles. The second story entrances are sheltered on the south facade by the wide eaves of the main roof.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3301 Colley Avenue**
PROPERTY NAME: Manufacturing Facility, 3301 Colley Avenue
OTHER NAME (S): Reorganized Church of Jesus Christ Latter Day Saints
CONSTRUCTION DATE: 1962
DHR NUMBER (S): 122-5087-1487
DESCRIPTION (S):
This is a one-story manufacturing facility designed in the Modern Movement style and constructed in 1962. It incorporates a concrete slab foundation and a concrete block structural system. The east façade is divided into six bays by parged piers with aggregate veneer infill. A shallow corrugated metal overhang has been applied at the roofline. The primary entrance is centrally located and is comprised of a single-leaf, metal door surmounted by a transom. The building features fixed, metal windows. The south elevation features three garage bays with metal, roll-up doors. The roof is flat with a parapet coped in metal. This building has been converted to a church.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3311-3317 Colley Avenue**
PROPERTY NAME: Store, 3311-3317 Colley Avenue
OTHER NAME (S): John H. Pittman, bicycle repair, (3311), Machen Bros., grocers, (3313), D.P. Store, retail grocers, (3315), The Great A & P Tea Co., (3317)/Commercial Building, 3311-3317 Colley Avenue/ PC Magnet
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-0114 122-0921
DESCRIPTION (S):
This is a two-story store designed in the Late 19th and Early 20th Century American Movement style and constructed in 1917. It incorporates a brick foundation and a brick structural system. The building features a canted storefront entrance on the northeast corner. The primary entrance is comprised of a single-leaf, wood,

paneled door with an oval light flanked by 3-light sidelights with wood panels. The first story of the storefront features fixed, metal, plate glass windows surmounted by vinyl siding. A projecting overhang with a boxed cornice surmounts the storefront. The second story features 1/1, metal double-hung sash windows with rowlock brick sills and wood lintels. There is a single-leaf, metal, paneled door on the north elevation. The roof is flat with a parapet coped in metal. The building features a wood cornice with a wide frieze and modillions on the canted, northeast corner. There is an exterior, brick chimney on the south elevation of the building. There is a one-story ell appended to the south elevation. The east façade of the ell features vinyl-clad window openings. The south elevation of the ell features a metal, paneled, roll-up door; and an exterior, brick chimney. The ell roof is flat with a parapet.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3400 Colley Avenue**
PROPERTY NAME: Store, 3400 Colley Avenue
OTHER NAME (S): Taylor's Do It Center
CONSTRUCTION DATE: 1936
DHR NUMBER (S): 122-5087-1488
DESCRIPTION (S):
This is a one-story store designed in the Art Deco style and constructed in 1936. It incorporates a concrete slab foundation and a concrete block system clad in brick veneer. The south façade features a centrally located, projecting, squared bay containing the storefront. The storefront is comprised of plate glass and metal, sliding track doors surmounted by transoms and flanked by plate glass, storefront windows. The windows on the north and west elevations have been filled. The northeast corner is curved. The roof is flat with a parapet. There is a one-story, flat-roofed ell appended to the east elevation. The ell features five, exterior, parged chimneys on the east elevation and an exterior, parged brick chimney on the north elevation. The ell features a shed-roofed overhang clad in corrugated metal on the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3405 Colley Avenue**
PROPERTY NAME: Store, 3405 Colley Avenue
OTHER NAME (S): True Vine Church of Deliverance/Platinum Styles Cuts/Word of Life Church of Deliverance
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-1489
DESCRIPTION (S):
This is a two-story store designed in the Late 19th and Early 20th Century American Movement style and constructed in 1922. It incorporates a brick foundation and structural system. The east façade and the north elevation are clad in brick veneer. The east façade features six bays divided by one-story, brick piers on the first story. The storefronts are comprised of single-leaf, wood door with lights and fixed wood, fixed plate glass and metal storefront windows surmounted by vertical board. The building features soldier- and header-course brick beltcourses above the storefronts. The second story features 1/1, wood, double-hung sash windows with

rowlock brick sills and brick flat arch lintels. There is a soldier-course brick beltcourse at the roofline. The second story of the southeast corner of the building is cantilevered above the canted southeast corner of the first story, which contains a storefront. The storefront is comprised of a single-leaf, wood door with a boarded light flanked by fixed, wood, 3-light windows and surmounted by a wood panel. The roof is flat with a parapet coped in a rowlock brick course.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3413 Colley Avenue**
PROPERTY NAME: Store, 3413 Colley Avenue
OTHER NAME (S): Taylor Rental
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-1490
DESCRIPTION (S):
This is a one-story store designed in the Late 19th and Early 20th Century American Movement style and constructed in 1922. It incorporates a concrete slab foundation and a brick structural system that has been parged. The east elevation features a single-leaf, metal and plate glass door flanked by plate glass, storefront windows and surmounted by a transom. The building features an oversized, plate glass, storefront window on the north elevation. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3510 Colley Avenue**
PROPERTY NAME: Store, 3510 Colley Avenue
OTHER NAME (S): Second Hand Sally's/Turn'n Heads/American Home Care
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1491
DESCRIPTION (S):
This is a one-story store designed in the Late 19th and Early 20th Century American Movement style and constructed in 1917. It incorporates a concrete slab foundation and a brick structural system that has been parged. The west elevation features five bays divided by parged piers. The two south bays feature recessed, single-leaf doors, and fixed, metal windows. The north bay features a single-leaf, metal and plate glass door. The northwest corner is canted and contains a storefront comprised of a single-leaf, metal door. There is a single-leaf, metal, paneled door on the north elevation. The building features fixed, metal windows. The roof is flat with a stepped parapet on the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3513 Colley Avenue/805 36th Street**
PROPERTY NAME: Store, 3513 Colley Avenue
OTHER NAME (S): J. C. Law and Son Floors/Venus Beauty Salon/House, 805 36th Street/Duplex, 805 36th Street
CONSTRUCTION DATE: 1947

DHR NUMBER (S): 122-5087-1492
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1947. It incorporates a concrete slab foundation and a concrete block structural system clad in 6-course, American bond brick veneer. The east façade features four storefronts comprised of recessed, single-leaf, metal doors with lights surmounted by transoms and flanked by plate glass, storefront windows. Air-conditioning units fill the transoms above the storefront entrances. The storefront windows features rowlock brick sills. There is a single-leaf, metal door on the north elevation. The roof is flat.

- This is a two-and-one-half-story house designed in the Craftsman style and constructed circa 1915. It incorporates a brick foundation and a wood frame structural system. The first story is clad in weatherboard and the second story is clad in wood shingles. The north façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; square, wood columns resting on brick pedestals; and a plain, wood balustrade. There are two entrances on the north façade. The east entrance is comprised a single-leaf, wood door with multiple lights and a storm door. The west entrance is comprised of a single-leaf, metal door with a storm door. The house features individual and tripartite 1/1, wood, double-hung sash windows with storm windows. There is a hip-roofed dormer on the façade that features paired, 1/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles with a wide frieze under the wide eaves. The house features an exterior, brick chimney on the east elevation. This house has been converted into a duplex.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **3600 Colley Avenue**
PROPERTY NAME: Service Station, 3600 Colley Avenue
OTHER NAME (S): B & B Car Wash
CONSTRUCTION DATE: 1931
DHR NUMBER (S): 122-5087-1493
DESCRIPTION (S):
This is a one-story service station designed in the Late 19th and Early 20th Century American Movement style and constructed in 1931. It incorporates a concrete slab foundation and a concrete block structural system that has been parged. The southwest corner is canted and features the primary entrance. The primary entrance is comprised of a single-leaf door surmounted by a boarded transom. The west façade features two, roll-up, wood, paneled doors with lights. The lights on the garage doors have been boarded. The windows have been boarded or parged. The roof is flat with a parapet coped in metal. There is a one-story, shed-roofed, concrete block ell appended to the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3612 Colley Avenue**
PROPERTY NAME: Store, 3612 Colley Avenue
OTHER NAME (S): Expressive Creations
CONSTRUCTION DATE: 1945

DHR NUMBER (S): 122-5087-1494
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1945. It incorporates a concrete slab foundation and a concrete block structural system that has been parged. The east façade features two entrances. The north entrance is comprised of a single-leaf, metal, 15-light door. The south entrance features a single-leaf, metal door. The building features fixed, metal windows with concrete sills surmounted by concrete flat arches. The roof is hipped clad in asphalt shingles. There is a single-leaf door on the east elevation. There is a one-story, shed-roofed ell appended to the south end of the east elevation. There is a single-leaf, metal, paneled door located on the north elevation of the ell.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3706 Colley Avenue**
PROPERTY NAME: Apartment Building, 3706 Colley Avenue
OTHER NAME (S): Colley Apartments No. 1
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-1495
DESCRIPTION (S):
This is a two-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1910. It incorporates a brick foundation and a 6-course, brick structural system. The west façade features two, projecting, two-story, one-bay porches flanking a central bay. The porches are surmounted by asphalt-shingled shed roofs extending from the main roof. The porch features two-story, brick piers and plain, wood balustrades. The porches are accessed by single-leaf, wood doors with nine lights. The central bay features a brick, round arch opening with an articulated keystone accessing an open vestibule with two entrances. The entrances are comprised of a single-leaf, wood doors with nine lights and a storm doors. The building features 2/1, 6/1, and 6/2, wood double-hung sash windows with storm windows. The windows feature limestone sills and are surmounted by brick jack arches. The east elevation features a two-story, three-bay porch with an asphalt-shingled, hipped roof. The porch features plain, wood posts and a wrought iron balustrade. The central bay of the porch features metal stairs incorporated under the porch roof. The porches are accessed by single-leaf, wood door with storm doors. The roof is flat with parapets on the north and south elevations. The building features five, exterior, brick chimneys on the north elevation and five, exterior, brick chimneys on the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3710 Colley Avenue**
PROPERTY NAME: Apartment Building, 3710 Colley Avenue
OTHER NAME (S): Colley Apartments No. 2
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-1496
DESCRIPTION (S):
This is a two-story apartment building designed in the Late 19th and Early 20th Century American Movement

style and constructed in 1910. It incorporates a brick foundation and a 6-course, brick structural system. The west façade features two, projecting, two-story, one-bay porches flanking a central bay. The porches are surmounted by asphalt-shingled shed roofs extending from the main roof. The porch features two-story, brick piers and plain, wood balustrades. The porches are accessed by single-leaf, wood doors with nine lights. The central bay features a brick, round arch opening with an articulated keystone accessing an open vestibule with two entrances. The entrances are comprised of a single-leaf, wood doors with nine lights and a storm doors. The building features 2/1, 6/1, and 6/2, wood double-hung sash windows with storm windows. The windows feature limestone sills and are surmounted by brick jack arches. The east elevation features a two-story, three-bay porch with an asphalt-shingled, hipped roof. The porch features plain, wood posts and a wrought iron balustrade. The central bay of the porch features metal stairs incorporated under the porch roof. The porches are accessed by single-leaf, wood door with storm doors. The roof is flat with parapets on the north and south elevations. The building features five, exterior, brick chimneys on the north elevation and five, exterior, brick chimneys on the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3712 Colley Avenue**
PROPERTY NAME: House, 3712 Colley Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-1497
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1914. It incorporates a brick foundation and structural system clad in brick veneer. The west façade features a two-story, projecting, squared block on the south end. The block features a recessed entry sheltering the primary entrance. The entry features a double-leaf, wrought iron gate. The building features individual and tripartite, 1/1, metal, double-hung sash windows with rowlock brick sills. There is a two-story, projecting, squared bay on the north elevation. The roof is hipped clad in asphalt shingles. There is a two-story, shed-roofed ell appended to the east end of the south elevation. The ell is clad in aluminum siding punctuated by metal windows. The building features an interior, parged brick chimney on the east elevation. There is a freestanding, brick wall appended to the west end of the south elevation.

- This is a one-story, two-car garage designed in the Modern Movement style and constructed circa 1950. It incorporates a concrete slab foundation and a wood frame structural system clad in aluminum siding. The garage features two, metal, paneled, roll-up doors. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

Colonial Avenue

PROPERTY ADDRESS: **2401 Colonial Avenue**

PROPERTY NAME: Store, 2401 Colonial Avenue
OTHER NAME (S): Duron Paints and Wallcoverings
CONSTRUCTION DATE: 1960
DHR NUMBER (S): 122-5087-1499
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1960. It incorporates a concrete slab foundation and a concrete block structural system that has been parged. The east façade features the primary entrance comprised of a double-leaf, plate glass and metal door surmounted by transom. The roof is flat with a parapet coped in metal.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2406 Colonial Avenue**
PROPERTY NAME: Store, 2406 Colonial Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-1500
DESCRIPTION (S):
This is a two-story store designed in the Late 19th and Early 20th Century American Movement style and constructed in 1915. It incorporates a brick foundation and a brick structural system. The west façade features window and door openings that have been filled with concrete block. The second story façade features 6/6, metal, double-hung sash windows with rowlock brick sills. There is a single-leaf door opening on the second story of the south façade. The window openings on the first story of the south facade have been filled with concrete block. The roof is flat with corbelled cornice. There is a one-story addition appended to the east elevation of the building. The addition is concrete block and has a flat roof.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2410 Colonial Avenue**
PROPERTY NAME: House, 2410 Colonial Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1904
DHR NUMBER (S): 122-5087-1501
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1904. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The west façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; a metal awning; wood, Tuscan columns; and a plain, wood, balustrade. The north elevation of the porch has been enclosed with vinyl siding punctuated by paired, 6/6, metal, double-hung sash windows. The house features a two-and-one-half-story, projecting tower on the southeast corner that is surmounted by an octagonal roof. The house features 1/1, wood, double-hung sash windows with storm windows. Metal awnings surmount the second story façade windows. There is a gable-roofed wall dormer on the north elevation that features a 1/1, wood, double-hung sash window

and cornice returns. The roof is gable clad in asphalt shingles with cornice returns.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2414 Colonial Avenue**
PROPERTY NAME: House, 2414 Colonial Avenue
OTHER NAME (S): Colonial Office Suites
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-1502
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The west façade features a one-story, three-bay porch incorporated under the main roof. The porch features plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal door with a storm door surmounted by a transom. The house features 1/1, metal, double-hung sash windows. Non-functional shutters flank the first story façade windows. There is a one-story, projecting, canted bay on the north elevation. There is a shed-roofed dormer on the façade that features paired, 1/1, metal, double-hung sash windows. There is a shed-roofed dormer on the east elevation. There is a one-story, projecting, canted ell appended to the south elevation. The roof is side gable clad in asphalt shingles. The house features an interior, brick chimney on the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2415 Colonial Avenue**
PROPERTY NAME: Store, 2415 Colonial Avenue
OTHER NAME (S): Goodwill Baptist Church
CONSTRUCTION DATE: circa 1950
DHR NUMBER (S): 122-5087-1503
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed circa 1950. It incorporates a concrete slab foundation and a concrete block structural system. The east façade is clad in common bond brick veneer. The primary entrance is centrally located and is comprised of a double-leaf, metal, paneled door surmounted by a projecting, metal overhang. The building features a single-leaf, metal, paneled door on the north elevation. The building features 3-light, metal casement windows. The façade windows features rowlock brick sills. The façade gable is clad in aluminum siding. The roof is gable clad in asphalt shingles. The building features an interior, brick chimney on the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2511 Colonial Avenue**
PROPERTY NAME: Gas Station, 2511 Colonial Avenue
OTHER NAME (S): Quik Pic-Up
CONSTRUCTION DATE: 1940

DHR NUMBER (S): 122-5087-1504
DESCRIPTION (S):
This is a one-story gas station designed in the Modern Movement style and constructed in 1940. It incorporates a concrete slab foundation and a parged, concrete block structural system. The primary entrance is located on the east façade and is comprised of a single-leaf, plate glass and metal door surmounted by a transom and flanked by plate glass, storefront windows. A cloth awning surmounts the primary entrance. The building features fixed, metal and plate glass, storefront windows. Cloth awnings surmount some of the windows on the north and south elevation. There is a single-leaf, metal door on the north elevation. The roof is flat with a parapet clad in corrugated metal. The parapet is coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2512 Colonial Avenue**
PROPERTY NAME: Store, 2512 Colonial Avenue
OTHER NAME (S): Park Food Store
CONSTRUCTION DATE: 1947
DHR NUMBER (S): 122-5087-1505
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed circa 1947. It incorporates a concrete slab foundation and a concrete block structural system. The southwest corner is canted and features the primary entrance. The primary entrance is comprised of a double-leaf, metal and plate glass door. An asphalt-shingled, hipped overhang has been applied to the south and west elevations which is supported by metal posts. The building features fixed, metal and plate glass windows. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2607 Colonial Avenue**
PROPERTY NAME: Recreation Center, 2607 Colonial Avenue
OTHER NAME (S): Boys and Girls Club
CONSTRUCTION DATE: 1950
DHR NUMBER (S): 122-5087-1506
DESCRIPTION (S):
This is a two-story recreation center designed in the Modern Movement style and constructed in 1950. It incorporates a concrete slab foundation and a parged, concrete block structural system. The east façade features a centrally located entrance bay comprised of a two-story, projecting, squared bay surmounted by a parged, concrete block round arch. The primary entrance is comprised of double-leaf, metal doors with lights accessed by stairs. The building features fixed, metal windows. There is a one-story ell appended to the northeast corner of the building. The roof is flat with a parapet coped in metal. A one-story addition has been appended to the southwest corner of the main building. It was constructed circa 1985. It incorporates a concrete slab foundation and a concrete block structural system. The west elevation is four bays wide and clad in brick veneer. The south façade features a centrally located primary entrance comprised of double-leaf, metal doors with lights. The entrance is surmounted by a parged, concrete block, round arch. The roof is flat with a parapet coped in

metal. The west elevation features a crenellated parapet.

- This is a large-scale, one-story indoor pool enclosure designed in the Modern Movement style and constructed circa 1950. It incorporates a concrete slab foundation and a brick structural system clad in brick veneer. The building features brick buttresses on the north and west elevations. The building features metal, hopper windows with rowlock brick sills. There is a single-leaf, metal door on the west elevation that is accessed by metal stairs. The building features a barrel roof clad in asphalt shingles. There is an exterior, brick chimney on the west elevation.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **2700 Colonial Avenue**
PROPERTY NAME: Apartment Building, 2700 Colonial Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1986
DHR NUMBER (S): 122-5087-1507
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1986. It incorporates a concrete slab foundation and a wood frame structural system clad in brick veneer. The west façade features four entrances comprised of single-leaf, metal, paneled doors. The second story entrances are accessed by a wood balcony appended to the west facade with wood stairs mounted on the north elevation. The building features 9/9, metal, double-hung sash windows with rowlock brick sills. Air conditioning units punctuate the façade. The roof is side gable clad in asphalt shingles. The roof features a wide eave on the west façade that shelters the second story entrances.

NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2801 Colonial Avenue**
PROPERTY NAME: Apartment Building, 2801 Colonial Avenue
OTHER NAME (S): Danmad Apartments, 2801-2803 Colonial Avenue
CONSTRUCTION DATE: circa 1915
DHR NUMBER (S): 122-5087-1509
DESCRIPTION (S):
This is a three-story apartment building designed in the Late 19th and Early 20th Century American Movement and constructed circa 1915. It incorporates a brick foundation and 7-course, American bond brick structural system. The north elevation wall has been parged. The east façade features two, three-story, one-bay porches flanking a central entrance bay. The porches feature asphalt-shingled, hipped roofs; boxed cornices; wide friezes; and plain, wood balustrades. The first story features brick piers that extend to the ground and are surmounted by a cornice. The second and third stories share common two-story piers supporting the porch roofs. The porches are accessed by single-leaf, wood doors with storm doors. The first story porch entrances have been boarded. The primary entrance is centrally located and is comprised of a single-leaf, boarded door flanked by paneled sidelights and surmounted by a boarded transom, a brick flat arch, and a limestone panel that reads "DANMAD." The building features 1/1, metal, double-hung sash windows with rowlock brick sills

surmounted by brick jack arches. The first story and foundation windows have been boarded. The roof is flat with a stepped parapet coped in metal. The building features an applied wood cornice with a wide frieze. The building features an interior, parged brick chimney embedded in the south elevation wall.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2807 Colonial Avenue**
PROPERTY NAME: House, 2807 Colonial Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-0023
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1916. It incorporates a brick foundation and wood frame structural system. The first story is brick and the second story is clad in vinyl siding. The east façade features a one-story, two-bay porch with a shed roof extending from the main roof. The porch features squared, wood columns resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a storm door surmounted by a 3-light transom. The house features 1/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows. The first story windows feature limestone sills and lintels. There is an oversized, gable-roofed dormer on the façade that features tripartite, 1/1, wood, double-hung sash windows with storm windows flanked by non-functional shutters. The dormer features a fixed, metal, 12-light window at the roof apex and brackets under the rakes. The roof is side gable clad in asphalt shingles with brackets under the rakes. The house features an interior, brick chimney with a corbelled cap on the south elevation. There is a one-story porch incorporated under the main roof on the southwest corner. The incorporated porch features plain, wood posts and balustrade.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1995. It incorporates a wood frame structural system clad in vinyl siding. The shed features a single-leaf, metal, paneled door. The roof is gable clad in asphalt shingles with cornice returns.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2811 Colonial Avenue**
PROPERTY NAME: Apartment Building, 2811 Colonial Avenue
OTHER NAME (S): Coddington Apartments, 2819 Colonial Avenue
CONSTRUCTION DATE: 1929
DHR NUMBER (S): 122-5087-0022
DESCRIPTION (S):
This is a three-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1929. It incorporates a brick foundation and a brick structural system. There is a soldier course brick watertable on the east façade and the south elevation. The building features a limestone beltcourse between the second and third stories. The east façade features two entrances comprised of single-

leaf, wood, paneled doors surmounted by rounded arch transoms filled with wood panels carved in fanlight motifs. The door surrounds features a brick header course and articulated limestone keystones. The building features 6/6, metal, double-hung sash windows and tripartite, 4/4, metal, double-hung sash windows. The windows feature rowlock brick sills on the first and second stories. The third story windows are surmounted by brick, flat arches with articulated limestone keystones. The northeast corner of the building features a storefront located on a one-story, projecting, squared bay that is partially incorporated within the 3-story apartment building. The storefront features a recessed, single-leaf, wood, paneled door flanked by wood paneled storefront windows punctuated by 8/8, metal, double-hung sash windows. A wood cornice surmounted the storefront on the east façade. There is a barred, double-hung sash window opening on the north elevation. The remaining window openings on the north elevation have been filled. There is a storefront on the north elevation at the west corner that features a recessed, single-leaf, metal door flanked by storefront windows filled with concrete block. Boarded window openings and a wood cornice surmount the entrance. The storefront roof is flat with a parapet coped in a header brick course. The main roof is flat with a stepped parapet that features a limestone cornice. There is a one-story, wood-frame, asbestos-clad ell appended to the second story of the west elevation that features a shed-roof and single-leaf, metal doors. The building features an interior, brick chimney on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2910 Colonial Avenue**
PROPERTY NAME: Store, 2910 Colonial Avenue
OTHER NAME (S): Holy Church of Deliverance/St. Matthew's Church of Deliverance/J.C.'s House of Worship
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1510
DESCRIPTION (S):
This is a one-story store designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a brick foundation and a brick structural system. The west façade is clad in vertical board. The west façade features five entrances comprised of single-leaf wood doors. The northwest corner is canted and features a single-leaf, metal, paneled door. A false, asphalt-shingled, pent roof surmounts the storefront. The building features fixed, metal windows. The roof is flat with a crenellated and parged parapet. The east elevation features four, single-leaf, metal doors and filled window openings.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3412 Colonial Avenue**
PROPERTY NAME: Apartment Building, 3412 Colonial Avenue
OTHER NAME (S): Colonial Hall Apartments
CONSTRUCTION DATE: 1925
DHR NUMBER (S): 122-5087-1511
DESCRIPTION (S):
This is a four-story apartment building designed in the Late 19th and Early 20th Century American Movement

and constructed in 1925. It incorporates a brick foundation and 6-course, American bond brick structural system. The west façade is clad in brick veneer. The building features limestone watertable and beltcourses. The building occupies a U-shaped footprint on the property. There are three entrances on the first story comprised of single-leaf, wood doors. There is a brick wall and centrally located wrought iron gate on the west façade that forms a courtyard for the building. The central bay features a three-story, projecting, squared bay. The flanking north and south wings each feature two, four-story, projecting, canted bays. The building features individual and paired, 1/1, metal, double-hung sash windows with limestone sills. The north and south elevations feature two recessed bays with metal fire escapes. The fire escapes are accessed by single-leaf, wood doors with lights and storm doors. The roof is flat with a crenellated parapet coped in limestone. The building features a limestone cornice. There are triangular-shaped medallions at the roofline on the façade.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3515 Colonial Avenue**
PROPERTY NAME: Gas Station, 3515 Colonial Avenue
OTHER NAME (S): Superior Plumbing
CONSTRUCTION DATE: 1940
DHR NUMBER (S): 122-5087-1512
DESCRIPTION (S):
This is a one-story gas station designed in the Colonial Revival style and constructed in 1940. It incorporates a concrete slab foundation and a concrete block structural system clad in brick veneer. The east façade features a single-leaf, metal, paneled door. The building features fixed, metal, multiple-light windows. There is a single-leaf metal door on the south elevation. The roof is cross-gable clad in asphalt shingles. The façade gable features a rectangular-shaped, metal, louvered vent. There is a one-story, flat-roofed ell on the north elevation that features a wood balustrade on the roof. The building features a central, interior, parged brick chimney with a corbelled cap. Appended to the south elevation is a metal-clad garage bay with a shed roof and overhead garage door.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1970. It incorporates a concrete slab foundation and a metal frame structural system clad in corrugated metal. The garage features a metal, roll-up door on the west elevation. The roof is a low-raking gable clad in corrugated metal. It is connected to the main building by a metal-clad hyphen.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3603 Colonial Avenue**
PROPERTY NAME: House, 3603 Colonial Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1513
DESCRIPTION (S):
This is a two-story Bungalow constructed in 1916. It incorporates a brick foundation and a wood frame

structural system clad in wood shingles. The east façade features a one-story, three-bay porch incorporated under the main roof. The porch features a centrally located entrance; battered, wood piers resting on brick pedestals; and a wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light surmounted by a transom and flanked by sidelights. The house features individual and tripartite, 1/1, metal, double-hung sash windows. The north and south elevations feature one-story, projecting, canted bays. There is an oversized, shed-roofed dormer on the façade. The dormer features exposed, wood rafters; and 1/1, metal, double-hung sash windows. There is a shed-roofed dormer on the west elevation. The roof is side gable clad in asphalt shingles with exposed, wood rafters under the eaves and brackets under the rakes. The house features two, interior, brick chimneys on the north and south elevations. There is a one-story, shed-roofed ell appended to the west elevation.

- This is a one-story garage designed in the Craftsman style and constructed circa 1920. It incorporates a wood frame structural system clad in wood shingles. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **3611 Colonial Avenue**
PROPERTY NAME: Apartment Building, 3611 Colonial Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1939
DHR NUMBER (S): 122-5087-1514
DESCRIPTION (S):
This is a three-story apartment building designed in the Art Deco style and constructed in 1939. It incorporates a brick foundation and a brick structural system clad in 3-course, American bond brick with a course of Flemish bond. The east façade features five bays. The end and central bays are divided from the two interior bays flanking the central bay by projecting, three-story brick piers. The primary entrance is centrally located and is comprised of a single-leaf, metal, paneled door. The building features individual and paired, 1/1, metal, double-hung sash windows with rowlock brick sills. Some of the façade windows are flanked by three-story, brick stack-bond courses. The roof is flat with a stepped parapet with Art Deco details formed by patterned brickwork.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1950. It incorporates a brick structural system. The roof is flat.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **3700 Colonial Avenue**
PROPERTY NAME: House, 3700 Colonial Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1515
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1920. It incorporates

a brick foundation and a wood frame structural system. The first story is clad in aluminum siding and the second story is clad in wood shingles. The west façade features a one-story, one-bay porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and a plain wood balustrade. The primary entrance is centrally located and is comprised of a single-leaf, wood door with lights and a storm door. The house features individual, paired, and tripartite, 3/1, wood, double-hung sash windows with storm windows. There is a Jerkinhead-gable-roofed dormer on the south elevation. The façade gable features a 5-light, wood, casement window. The east elevation features a one-story, projecting, squared bay with an asphalt-shingled hipped roof with exposed, wood rafters. The south end of the projecting bay features an incorporated, one-bay porch with a plain, wood post. The roof is Jerkinhead-gable clad in asphalt shingles with wide eaves.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in asbestos siding. The garage features double-leaf, wood, paneled doors with six lights. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **3701 Colonial Avenue**
PROPERTY NAME: House, 3701 Colonial Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1516
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The west façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof and wood, Tuscan columns. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a 3-light transom. The house features Queen Anne, wood, double-hung sash windows with storm windows. There is a two-story, projecting, canted bay on the north end of the façade that is surmounted by a closed gable. The closed gable is clad in vinyl siding and features a boarded window opening. There is an intersecting, closed gable on the north elevation. There is a two-story, projecting, canted bay on the south elevation that is surmounted by a closed gable. The closed gable is clad in vinyl siding and features a boarded window opening. The south elevation of the wraparound porch has been enclosed and is clad in wood shingles. The enclosed portion of the porch features a secondary entrance accessed by wood stairs on the south elevation. The roof is hipped-cross-gable clad in asphalt shingles with a wide frieze under the wide eaves. There is a two-story, shed-roofed ell appended to the west elevation.

- This is a one-story, two-car garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1920. It incorporates a wood frame structural system clad in wood shingles. The garage features two, metal, paneled, roll-up doors. The roof is hipped clad in asphalt shingles with exposed, wood rafters under the eaves.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **3705 Colonial Avenue**
PROPERTY NAME: House, 3705 Colonial Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1517
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival-Craftsman style and constructed in 1918. It incorporates a brick foundation and a brick structural system. The house features brick quoins on the northeast and northwest corners. The east façade features a one-story, one-bay porch with an asphalt-shingled, gable roof with brackets under the rakes; a wide frieze; squat and battered, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door flanked by 1-light and wood paneled sidelights. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows and limestone sills. There is a single-leaf door on the north elevation. An asphalt-shingled, shed roof with exposed, wood rafters surmounts the first story windows on the south façade. There are gable-roofed dormers on the north and south elevations. The dormers are clad in wood shingles and features paired, 6/6, wood, double-hung sash windows; exposed, wood rafters under the eaves; and brackets under the rakes. The façade gable is clad in wood shingles and features paired, 6/6, wood, double-hung sash windows. The roof is gable clad in asphalt shingles with exposed, wood rafters under the eaves and brackets under the rakes. The house features an exterior, brick chimney on the south elevation with a corbelled cap. The chimney has been stuccoed above the roofline. There is a one-story ell appended to the west elevation.

- This is a one-story shed designed in the Colonial Revival style and constructed circa 1920. It incorporates a wood frame structural system clad in wood. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **3706 Colonial Avenue**
PROPERTY NAME: House, 3706 Colonial Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1518
DESCRIPTION (S):
This is a two-story Bungalow constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The west façade features a one-story, three-bay porch incorporated under the main roof. The porch features a centrally located entrance and battered, wood piers resting on a vinyl-clad balustrade. The primary entrance is centrally located and is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a storm door surmounted by a transom. The house features 1/1, wood, double-hung sash windows with storm windows. The first story façade features fixed, wood windows surmounted by 9-light, wood, clerestory windows. There is an oversized, gable-roofed dormer on the façade. The dormer features paired, 4/1, wood, double-hung sash windows surmounted by a diamond-motif frieze and sunburst-motif panel in the gable. The roof is side gable clad in asphalt shingles. The house features an interior, parged brick

chimney with a corbelled cap on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3708 Colonial Avenue**
PROPERTY NAME: House, 3708 Colonial Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1519
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The west façade features a two-story porch incorporated under a shed roof extending from the main roof. The first story porch is two bay and features a false, asphalt-shingled, hipped roof with exposed, wood rafters under the eaves; clustered, wood posts resting on brick pedestals; and a wood balustrade. The second story porch has been enclosed with wood shingles punctuated by paired, 6/1, wood, double-hung sash windows with storm windows. The primary entrance is comprised of a single-leaf, metal, paneled door flanked by two-light and wood, paneled sidelights. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a gable-roofed dormer on the façade. The dormer features exposed, wood rafters under the eaves and paired, 1/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles with exposed, wood rafters under the eaves. The house features an exterior, brick chimney on the north elevation. There is a one-story, shed-roofed ell appended to the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3709 Colonial Avenue**
PROPERTY NAME: House, 3709 Colonial Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1520
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival-Craftsman style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The east façade features a one-story, two-bay porch with an asphalt-shingled, gable roof with brackets under the rakes; heavy, wood, Tuscan columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door surmounted by a transom and flanked 1-light and wood, paneled sidelights. The house features individual and tripartite, 1/1, wood, double-hung sash windows with storm windows. There is a single-leaf door on the north elevation. There are gable-roofed dormers on the east façade and the south elevation. The façade dormer features paired, 1/1, wood, double-hung sash windows and exposed, wood rafters under the eaves. The south elevation dormer features an aluminum-clad window opening and exposed, wood rafters under the eaves. The roof is hipped clad in asphalt shingles with exposed, wood rafters under the wide eaves. The house features an interior, brick chimney on the south elevation with a corbelled cap.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3710 Colonial Avenue**
PROPERTY NAME: House, 3710 Colonial Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1521
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The west façade features a two-story porch incorporated under a shed roof extending from the main roof. The first story porch is two bay and features a false, asphalt-shingled, hipped roof; a metal awning surmounting the porch entrance; clustered fluted, Tuscan columns resting on brick pedestals; and a plain, wood balustrade. The second story porch has been enclosed and features a wood-shingled balustrade and tripartite, 1/1, metal, double-hung sash windows. The primary entrance is comprised of a single-leaf door with a wrought iron storm door flanked by one-light and wood, paneled sidelights. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a gable-roofed dormer on the façade. The dormer features paired, 1/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles. The house features an exterior, brick chimney on the south elevation. The chimney has been parged above the roofline. There is a one-story, shed-roofed porch appended to the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3711 Colonial Avenue**
PROPERTY NAME: House, 3711 Colonial Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-1522
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1914. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The east façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a wide frieze; wood, Tuscan columns resting on a vinyl-clad pedestals; and a vinyl-clad balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light surmounted by a multiple-light transom and flanked by ten-light and wood, paneled sidelights. The house features individual and paired, 8/8, metal, double-hung sash windows flanked by non-functional shutters. There is a one-story, projecting squared oriel on the north elevation. There are hip-roofed dormers on the east façade and the north and south elevations. The dormers feature 8/8, metal, double-hung sash windows. The roof is hipped clad in asphalt shingles with a wide frieze under the eaves. There is a two-story, projecting, gable-roofed, squared block appended to the south end of the west elevation that is surmounted by a closed gable. The north elevation of the block features a one-story, two-bay porch with an asphalt-shingled, hipped roof; turned, wood posts; and a plain, wood balustrade.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3714 Colonial Avenue**
PROPERTY NAME: House, 3714 Colonial Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1913
DHR NUMBER (S): 122-5087-1523
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1913. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The west façade features one-story, two-bay porch with an asphalt-shingled, hipped roof; a metal awning; battered, wood piers resting on brick pedestals; and a wood balustrade. The primary entrance is comprised of a single-leaf door flanked by sidelights. The house features 1/1, wood, double-hung sash windows with storm windows. There is a hip-roofed dormer on the façade. The dormer features paired, 1/1, wood, double-hung sash windows with storm windows. The roof is hipped clad in asphalt shingles with wide eaves. The house features an interior, brick chimney with a corbelled cap on the north elevation.

CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3716 Colonial Avenue**
PROPERTY NAME: House, 3716 Colonial Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1524
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The west façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a dentiled cornice; replacement columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door surmounted by a transom. The house features Queen Anne, wood, double-hung sash windows with storm windows. There is a two-story, projecting, canted bay on the north end of the west façade that is surmounted by a closed gable. The closed gable is clad in fishscale-cut, vinyl siding and features a 1/1, wood, double-hung sash window. There is a two-story, projecting, canted bay on the east end of the north elevation that is surmounted by a closed gable. The closed gable is clad in fishscale-cut, vinyl siding and features paired, Queen Anne, wood, double-hung sash windows. There is a single-leaf door on the north elevation. There is a one-story, projecting, squared oriel located between the first and second stories on the north elevation. There is a closed, gable on the south elevation. The roof is hipped-cross-gable clad in asphalt shingles with wide eaves. The house features elongated scrolled brackets at the canted bay corners under the eaves. The house features an exterior, brick chimney with a corbelled cap on the north elevation and a central interior, brick chimney. There is a one-story, enclosed porch appended to the east elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, paneled, roll-up door. The roof is gable clad in asphalt single.

CONTRIBUTING (2 - buildings)

Debree Avenue

PROPERTY ADDRESS: **2406 Debree Avenue**
PROPERTY NAME: Pepsi-Cola Bottling Plant (1946/1957/1958)
OTHER NAME (S): Best Repair Company
CONSTRUCTION DATE: 1938
DHR NUMBER (S): 122-5087-0115 122-0754
DESCRIPTION (S):
This is a one-story manufacturing facility designed in the Art Deco style and constructed in 1938. It incorporates a concrete slab foundation and a concrete block structural system that has been parged. The west façade features a centrally located, two-story entrance pavilion with a stepped parapet. The primary entrance is centrally located and is comprised of a single-leaf door framed by a Colonial Revival door surround and surmounted by a projecting, metal, streamline overhang. The first story of the pavilion features fixed, metal, circular windows. The second story of the pavilion features 12/12, metal, double-hung sash windows with parged sills. The north end of the façade features a single-leaf, metal door; and filled window openings surmounted by awnings. The south end of the façade features a roll-up, metal door; and metal, industrial sash windows. The south elevation features two, metal, roll-up doors; and wood-paneled window openings. The north elevation features three, metal, roll-up garage doors; and wood-paneled window openings. The building features two interior, brick chimneys on the north and south elevations. There is an exterior brick chimney on the south elevation of the central pavilion. The roof is flat with a stepped parapet.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2519 Debree Avenue**
PROPERTY NAME: Store, 2519 Debree Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1915
DHR NUMBER (S): 122-5087-1525
DESCRIPTION (S):
This is a two-story store designed in the Late 19th and Early 20th Century American Movement style and constructed in 1915. It incorporates a concrete slab foundation and parged, brick structural system. The east façade features a single-leaf, metal door with two lights. The building features 1/1, metal, double-hung sash windows. The façade gable is clad in vinyl siding and features a 1/1, metal, double-hung sash window. The roof is gable clad in standing-seam metal. There is a one-story garage bay appended to the east elevation of the

building that is sheltered by a shed roof extending from the main roof. The garage bay features a metal, roll-up door.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2715 Debree Avenue**
PROPERTY NAME: Duplex, 2715 Debree Avenue
OTHER NAME (S): Apartment Building, 2715 Debree Avenue
CONSTRUCTION DATE: 1987
DHR NUMBER (S): 122-5087-1526
DESCRIPTION (S):
This is a two-story duplex designed in the Modern Movement style and constructed in 1987. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in brick veneer. The south façade features three, centrally located entrances. The central entrance is comprised of single-leaf, metal, paneled door with nine lights. The flanking entrances are comprised of single-leaf, metal, paneled doors. The entrances are accessed by brick stairs leading to a stoop with a plain, wood balustrade. The building features 1/1, metal, double-hung sash windows with rowlock brick sills flanked by non-functional shutters. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2805 Debree Avenue**
PROPERTY NAME: Apartment Building, 2805 Debree Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1927
DHR NUMBER (S): 122-5087-1527
DESCRIPTION (S):
This is a two-story apartment building designed in the Colonial Revival style and constructed in 1927. It incorporates a brick foundation and a 1-course, American bond structural system. The second story has been stuccoed. The east façade features three bays. The south bay features a two-story, one-bay porch incorporated under the main, hipped roof. The first story porch has been enclosed and features a metal awning and a single-leaf, wrought iron storm door. The second story porch features a plain, wood post and balustrade; and a metal awning. The second story porch is accessed by a single-leaf door. The north bay features a single-leaf door with a wrought iron storm door surmounted by a metal awning an accessed by brick stairs. The central bay is a two-story, projecting, and squared surmounted by a gable roof with cornice returns. The façade gable on the central bay features a round arch window opening filled with a rectangular-shaped, metal, louvered vent. The building features 1/1, metal, double-hung sash windows. Metal awnings surmount some of the windows. Metal bars have been applied over many of the first story windows. There is a single-leaf door surmounted by a transom and a metal awning on the south elevation. The roof is hipped clad in asphalt shingles. The building features a central, interior, parged brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2814 Debree Avenue**
PROPERTY NAME: Apartment Building, 2814 Debree Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1528
DESCRIPTION (S):
There is a two-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a 6-course, American bond brick foundation and a wood frame structural system clad in asbestos siding. The west façade features a centrally located entrance comprised of a single-leaf, metal door surmounted by an asphalt-shingled, shed roof. The building features two-story, one-bay porches with asphalt-shingled, shed roofs on the north and south elevations. The porches feature asbestos-clad piers and balustrades. The building features individual and paired, 6/1, wood, double-hung sash windows. The roof is hipped clad in asphalt shingles.
CONTRIBUTING (1 - building)

Gosnold Avenue

PROPERTY ADDRESS: **2501 Gosnold Avenue**
PROPERTY NAME: House, 2501 Gosnold Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-1529
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1922. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The east façade features a one-story, one-bay porch with an asphalt-shingled, gable roof and battered, wood piers resting on brick pedestals. The primary entrance is comprised of a single-leaf, wood door with six lights and a storm door. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. There is an intersecting gable on the south elevation. The roof is gable clad in asphalt shingles with wide eaves. The façade gable features a one-light, wood, casement window.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2503 Gosnold Avenue**
PROPERTY NAME: House, 2503 Gosnold Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-1530
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1922. It incorporates a brick foundation and a wood frame

structural system clad in vinyl siding. The east façade features a one-story, one-bay porch with an asphalt-shingled, gable roof and battered, wood piers resting on parged brick pedestals. The primary entrance is comprised of a single-leaf, wood door with six lights. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The roof is gable clad in asphalt shingles with exposed, wood rafters under the eaves. The façade gable features a boarded window opening.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2505 Gosnold Avenue**
PROPERTY NAME: House, 2505 Gosnold Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-1531
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1922. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The east façade features a one-story, one-bay porch with an asphalt-shingled, gable roof and battered, wood piers resting on brick pedestals. The primary entrance is comprised of a single-leaf, wood door with a storm door. The house features individual and paired, 6/6, wood, double-hung sash windows with storm windows. The roof is gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2507 Gosnold Avenue**
PROPERTY NAME: House, 2507 Gosnold Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-1532
DESCRIPTION (S):
This is a one-story Bungalow constructed in 1922. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The east façade features a one-story, one-bay porch with an asphalt-shingled, gable roof and battered, wood piers resting on stuccoed brick pedestals. The primary entrance is comprised of a single-leaf, wood door with a storm door. The house features individual and paired, 6/6, wood, double-hung sash windows with storm windows. The roof is gable clad in asphalt shingles. The house features an interior, parged brick chimney on the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2601 Gosnold Avenue**
PROPERTY NAME: House, 2601 Gosnold Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-1533
DESCRIPTION (S):

This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1922. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The east façade features a one-story, three-bay porch with an asphalt-shingled, gable roof with brackets under the rakes; wrought iron posts and balustrade; stuccoed and battered, squat, wood piers resting on brick pedestals; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf door with a storm door. The house features 3/1, wood, double-hung sash windows with storm windows. There are oversized, shed-roofed dormers on the east façade and the west elevation. A shed-roofed dormer surmounts the dormer on the east façade. This dormer features exposed, wood rafters under the eaves and a 5-light, wood, casement window. There is a one-story, projecting, squared oriel on the south elevation that is surmounted by an asphalt-shingled, shed roof with exposed, wood rafters under the eaves. The roof is side gable clad in asphalt shingles with brackets under the rakes.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1950. It incorporates a wood frame structural system clad in vinyl siding. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **2607 Gosnold Avenue**
PROPERTY NAME: Apartment Building, 2607 Gosnold Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 2000
DHR NUMBER (S): 122-5087-1534
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 2000. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in brick veneer. The east façade features two, single-leaf, metal, paneled doors with two lights. The building features paired, 6/6, metal, double-hung sash windows with rowlock brick sills flanked by non-functional shutters. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2615 Gosnold Avenue**
PROPERTY NAME: House, 2615 Gosnold Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1995
DHR NUMBER (S): 122-5087-1535
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed in 1995. It is designed to resemble a Queen Anne style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The east façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a wrought iron storm door flanked on the south by a sidelight. The house features individual and tripartite, 4/4 and 6/6, metal, double-hung sash windows. There is a two-story,

projecting, squared block on the north end of the east elevation that is surmounted by a closed gable. The closed gable is clad in faux wood shingles and features an octagonal-shaped, vinyl, louvered vent. The façade gable is closed and is clad in faux wood shingles. The roof is gable clad in asphalt shingles.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1995. It incorporates a wood frame structural system clad in vinyl siding. The garage features a metal, paneled, roll-up door. The roof is gable clad in asphalt shingles.

NON-CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **2804 Gosnold Avenue**
PROPERTY NAME: Apartment Building, 2804 Gosnold Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-0044
DESCRIPTION (S):
This is a two-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1921. It incorporates a brick foundation and wood frame structural system clad in vinyl siding. The foundation windows have been bricked. The west façade features a centrally located, single-leaf, wood door with a light. The building features individual and paired, 1/1, metal, double-hung sash windows. The roof is hipped clad in asphalt shingles with wide eaves.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3509 Gosnold Avenue**
PROPERTY NAME: Garage/Tenant House, 3509 Gosnold Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1939
DHR NUMBER (S): 122-5087-1536
DESCRIPTION (S):
This is a two-story garage/tenant house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1939. It incorporates a concrete slab foundation and a wood frame structural system clad in weatherboard and wood shingles. The building currently faces north. The north elevation features the primary entrance, which is comprised of a single-leaf, wood door with a storm door surmounted by asphalt-shingled, gable roof supported by brackets. The entrance is accessed by concrete stairs with a wrought iron balustrade. The building features 6/6, wood, double-hung sash windows with storm windows. The east facade gable features a 6/6, wood, double-hung sash windows with a storm window surmounted by a rectangular-shaped, metal, louvered vent. There is an intersecting shed-roofed wall dormer on the south elevation that features exposed, wood rafters under the eaves. The roof is gable clad in asphalt shingles. There is a one-story, shed-roofed ell appended to the west elevation. The north elevation of the ell features an entrance comprised of a single-leaf, wood door with a storm door surmounted by asphalt-shingled, gable roof supported by brackets. This was originally a garage with an entrance on the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3601 Gosnold Avenue**
PROPERTY NAME: Duplex, 3601 Gosnold Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1988
DHR NUMBER (S): 122-5087-1537
DESCRIPTION (S):
This is a one-story duplex designed in the Modern Movement style and constructed circa 1988. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in brick veneer. The east façade features two entrances comprised of single-leaf, metal doors with wrought iron storm doors. The duplex features 1/1, metal, double-hung sash windows with rowlock brick sills. Non-functional shutters flank the windows. Air conditioning units punctuate the façade. There are two, single-leaf doors on the west elevation. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3701 Gosnold Avenue**
PROPERTY NAME: House, 3701 Gosnold Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1940
DHR NUMBER (S): 122-5087-1539
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1940. It has a Cape Cod form. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The east façade features a centrally located primary entrance comprised of a single-leaf, wood door with lights and a storm door surmounted by a pediment. The entrance is accessed by brick stairs to a stoop with a plain, wood balustrade. The house features individual and paired, 6/6, wood, double-hung sash windows with storm windows flanked by non-functional shutters. There are two, gable-roofed dormers on the east façade and one gable-roofed dormer on the west elevation that feature 6/6, wood, double-hung sash windows. The south elevation features a one-story, two-bay porch with an asphalt-shingled, hipped roof with a plain, wood balustrade; square, wood columns; and a plain, wood balustrade. The porch is accessed by single-leaf, wood, paneled door with a storm door. There is a single-leaf, door on the west elevation. The roof is side gable clad in asphalt shingles. The house features an interior, parged brick chimney with a corbelled cap on the west elevation.

- There is a one-story hyphen appended to the north elevation that connects the house to a circa 1970 two-story garage. The garage has been converted to dwelling space. The east façade of the hyphen features a single-leaf, wood door with six lights and a storm door and a one-light, fixed, wood window. The hyphen features a side gable roof clad in asphalt shingles. There is a two-story garage appended to the north elevation of the hyphen. The garage was constructed circa 1970. The east façade of the garage features a single-leaf door with a light surmounted by a metal awning. The garage features 2/2, wood,

double-hung sash windows flanked by non-functional shutters. The garage features a gable roof clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

Granby Street

PROPERTY ADDRESS: **2301-2305 Granby Street/ 110 West 23rd Street**
PROPERTY NAME: Batchelder & Collins
OTHER NAME (S):
CONSTRUCTION DATE: 1904
DHR NUMBER (S): 122-5087-0116 122-0913
DESCRIPTION (S):
This resource is a one-story warehouse designed in the Late 19th and Early 20th Century American Movement style and constructed in 1904. It incorporates a concrete slab foundation and a 7-course, American bond, brick structural system. The primary entrance is comprised of a single-leaf, metal door with a soldier brick lintel. There are three window openings on the façade. The windows framing the primary entrance are 2-light, metal and plate glass. These are replacement windows have been located within the original openings that have been partially filled with brick. The other window is metal with multiple lights. The windows are framed by segmental brick arches and have brick rowlock sills. The roof is shed with a parapet on the south elevation and east façade. The parapet has a corbelled brick cornice with a triangular motif at the roofline and metal coping. The north and south elevations feature window openings with segmental brick arches and header brick sills.

- There is a one-story warehouse appended to the east elevation of the main building. It is slightly shorter in height than the main building. It is designed in the Modern Movement style and was constructed in 1954. The building incorporates a concrete slab foundation and metal frame structural system clad in corrugated metal siding. It has a sliding, corrugated metal door on the south elevation. The roof is flat with metal coping.
- This secondary resource is a one-story warehouse designed in the Modern Movement style and constructed circa 1990. It incorporates a concrete slab foundation and metal structural system clad in brick veneer and corrugated metal siding. False window openings on the south and north elevations are filled with decorative brickwork and feature soldier brick lintels. There is a single-leaf, metal door on the east elevation and a roll-up garage door on the north elevation with a flat, metal roof overhang. The roof is side gable with metal cornice.
- This secondary resource is a two-story warehouse designed in the Late 19th and Early 20th Century American Movement style and constructed in 1921. It incorporates a concrete slab foundation and 7-course, American bond, brick structural system. Window openings on the second story of the east and west elevations are 2/2 double-hung, wood and have brick header sills. The first story window openings on the east and west elevation are 1-light, casement and are framed by 2-course, brick segmental arches

and brick rowlock sills. There are a single-leaf, wood door and a metal, roll-up garage door on the east elevation. It has a gable roof with visible wood rafters.

CONTRIBUTING (3 - buildings)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2308 Granby Street**
PROPERTY NAME: Warehouse, 2308 Granby Street
OTHER NAME (S): J. W. Gamage & Company/Foodbank of Southeast Virginia
CONSTRUCTION DATE: 1900
ARCHITECT: Benjamin Mitchell
DHR NUMBER (S): 122-5087-0119 122-0911
DESCRIPTION (S):
This is a one-story warehouse designed in the Late 19th and Early 20th Century American Movement style and constructed in 1900. It incorporates a brick foundation and a brick structural system. The building features multiple bays divided by brick piers. The west façade features a single-leaf door surmounted by a cloth awning and accessed by brick stairs with a plain, wood balustrade. The building features glass block windows with rowlock brick sills. There is a single-leaf door on the north elevation that is accessed by stairs with a metal balustrade. There is a single-leaf door on the south elevation. The building features a corbelled cornice. The roof is flat with a parapet coped in a rowlock brick course. The parapets are stepped on the north and south elevations. The building features two interior, brick chimneys on the west façade and the south elevation. There is a loading dock on the east elevation that is sheltered by a metal, shed roof appended to the building and supported by metal posts.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2400 Granby Street**
PROPERTY NAME: Store, 2400 Granby Street
OTHER NAME (S): Champion Fence
CONSTRUCTION DATE: 1950
DHR NUMBER (S): 122-5087-1540
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1950. It incorporates a concrete slab foundation and a concrete block structural system. The building features an L-shaped plan. Concrete block pilasters divide the west façade into three bays. The west façade features two entrances comprised of single-leaf, metal doors. The north entrance is surmounted by a transom and flanked by a bricked window opening. The roof is flat with a parapet coped in metal. The roof features wide eaves. There is an oversized, exterior, parged concrete block chimney on the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2407 Granby Street**
PROPERTY NAME: Storage Shelter, 2407 Granby Street

OTHER NAME (S):
CONSTRUCTION DATE: 1970
DHR NUMBER (S): 122-5087-1541
DESCRIPTION (S):
This is a one-story storage shelter designed in the Modern Movement style and constructed in 1970. It incorporates a brick foundation and structural system. The roof is flat with a parapet coped in a rowlock brick course. The storage shelter is open on the south elevation. The south elevation features a corrugated metal, shed roof.
NON-CONTRIBUTING (1 - structure)

PROPERTY ADDRESS: **2409 Granby Street**
PROPERTY NAME: Store, 2409 Granby Street
OTHER NAME (S): Union Mission Thrift Store
CONSTRUCTION DATE: circa 1940
DHR NUMBER (S): 122-5087-1542
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed circa 1940. It incorporates a concrete slab foundation and a parged concrete block structural system. The east façade features two storefronts comprised of single-leaf, plate glass doors surmounted by transoms and flanked by plate glass, storefront windows. There is a single-leaf, metal door on the north elevation. The roof is flat with a parapet coped in metal. The building features an exterior chimney on the north elevation. There is a one-story, brick addition on the west end of the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2410 Granby Street**
PROPERTY NAME: Store, 2410 Granby Street
OTHER NAME (S): Beacon Books of Ghent
CONSTRUCTION DATE: 1953
DHR NUMBER (S): 122-5087-1543
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1953. It incorporates a concrete slab foundation and concrete block structural system. The façade is clad in brick veneer. The west façade features a one-story, shallow, five-bay porch. The porch features wood, Tuscan columns supporting a projecting, squared, wood overhang and a metal balustrade. The primary entrance is centrally located and is comprised of a single-leaf door with a wrought iron storm door flanked by wood panels and fixed, storefront windows. Metal bars have been applied over the windows. The roof is flat with a parapet coped in rusticated stone.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2412 Granby Street**

PROPERTY NAME: Store, 2412 Granby Street
OTHER NAME (S): A Touch of Mystery Antiques
CONSTRUCTION DATE: 1930
DHR NUMBER (S): 122-5087-1544
DESCRIPTION (S):
This is a one-story store designed in the Late 19th and Early 20th Century American Movement style and constructed in 1930. It incorporates a brick foundation and wood frame structural system. The façade is clad in vertical board and portions have been parged. The north elevation is clad in vertical board. The west façade features a centrally located primary entrance comprised of a single-leaf, metal, 8-paneled door. The building features 6-light, fixed, metal windows surmounted by cloth awnings. The building features a wood cornice above the storefront. The roof is flat with a parapet.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2418 Granby Street**
PROPERTY NAME: Store, 2418 Granby Street
OTHER NAME (S): Booden Orthopedic and Prosthetic Center
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1545
DESCRIPTION (S):
This is a one-story store designed in the Late 19th and Early 20th Century American Movement style and constructed in 1917. It incorporates a brick foundation and a 7-course, American bond structural system. The west façade is clad in brick veneer and features a replacement storefront on the first story. The storefront has been parged. The storefront features a centrally located primary entrance comprised of a single-leaf, wood door with a light; and fixed, metal, storefront windows. A metal cornice surmounts the storefront. The building features individual and paired, 1/1, wood, double-hung sash windows with rowlock brick sills. Metal bars have been applied over the first story windows on the south elevation. The north elevation features glass block windows and bricked window openings. There is a single-leaf, metal door surmounted by a gable-roofed overhang supported by brackets on the north elevation. The roof is flat with a stepped parapet coped in metal. The building features an applied, hipped roof supported by wood brackets. There is an interior, brick chimney embedded in the north elevation wall. There is a one-story ell appended to the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2500 Granby Street**
PROPERTY NAME: Store, 2500 Granby Street
OTHER NAME (S): Auto Value
CONSTRUCTION DATE: 1972
DHR NUMBER (S): 122-5087-1546
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1972. It incorporates a concrete slab foundation and concrete block structural system. The west façade features a recessed storefront

comprised of single-leaf, plate glass door flanked by plate glass, storefront windows. The building features fixed, metal and plate glass, storefront windows. The roof is flat with a parapet coped in metal. The north end of the building features a taller roofline than the south end of the building.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2501 Granby Street**
PROPERTY NAME: Store, 2501 Granby Street
OTHER NAME (S): Mei Wah Restaurant
CONSTRUCTION DATE: 1900
DHR NUMBER (S): 122-5087-1547
DESCRIPTION (S):
This is a two-story store designed in the Late 19th and Early 20th Century American Movement style and constructed in 1900. It incorporates a brick foundation and structural system. The east façade is features a storefront on the south end. The storefront is clad in vertical board and features double-leaf, wood doors with lights; fixed, storefront windows; and a wood cornice. The north end of the façade features a single-leaf, wood, paneled door with a storm door surmounted by a transom. The building features 1/1, wood, double-hung sash windows with storm windows, rowlock brick sills and jack arch brick lintels. There is a boarded, single-leaf entrance on the south elevation. The roof is flat with a parapet coped in metal. There is an interior, brick chimney embedded in the south elevation wall. There is a two-story, shed roofed addition appended to the west elevation. The addition features a concrete block and wood structural system. The second story is clad in aluminum siding and is accessed by wood stair.

- This is a one-story, two-car garage designed in the Modern Movement style and constructed circa 1970. It incorporates a concrete structural system. The facade gable is clad in aluminum siding. The garage features two metal, roll-up doors. The roof is gable clad in asphalt singles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2505 Granby Street**
PROPERTY NAME: Store, 2505 Granby Street
OTHER NAME (S): ABC Bail Bonds
CONSTRUCTION DATE: 1954
DHR NUMBER (S): 122-5087-1548
DESCRIPTION (S):
This is a two-story store designed in the Modern Movement style and constructed in 1954. It incorporates a concrete slab foundation and a concrete block structural system. The east façade is clad in brick veneer. The south end of the east façade features a recessed storefront comprised of double-leaf, plate glass doors surmounted by a transom and flanked by fixed, plate glass, storefront windows. The north end of the east façade features a recessed, single-leaf, plate glass door surmounted by a transom and flanked by stack bond brick courses. A projecting, metal overhang surmounts the first story. The building features metal, awing windows with limestone sills. There is a centrally located limestone panel on the second story façade that reads

"BRICK LAYERS UNION NORFOLK NO. 2 VA 1954." The roof is flat with a parapet coped in metal. There is a one-story ell appended to the west elevation. There are metal stairs appended to the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2511 Granby Street**
PROPERTY NAME: Store/Dwelling, 2511 Granby Street
OTHER NAME (S):
CONSTRUCTION DATE: 1911
DHR NUMBER (S): 122-5087-1549
DESCRIPTION (S):
This is a two-story store/dwelling designed in the Late 19th and Early 20th Century American Movement style and constructed in 1911. It incorporates a brick foundation and a wood frame structural system. The first story of the dwelling is clad in brick veneer and the second story is clad in vinyl siding. The east elevation features a one-story storefront that incorporates a concrete block structural system. The upper portion of the storefront has been parged. The storefront features a centrally located, single-leaf, wood door with a light flanked by fixed, wood, storefront windows. The storefront features a flat roof with a parapet coped in metal. The dwelling features 1/1, metal and wood, double-hung sash windows. Metal awnings surmount some of the second story windows. There are double-leaf, wood doors on the north elevation. The facade gable is closed and features a boarded window opening. The roof is Jerkinhead-gable clad in asphalt shingles with a wide frieze under the eaves.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2512 Granby Street**
PROPERTY NAME: Store/Dwelling, 2512 Granby Street
OTHER NAME (S):
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-1550
DESCRIPTION (S):
This is a two-and-one-half-story store/dwelling designed in the Late 19th and Early 20th Century American Movement style and constructed in 1907. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The west elevation features a one-story storefront that incorporates a parged, concrete block structural system. The storefront features two entrances comprised of single-leaf, metal, paneled doors. A transom surmounts the south entrance. The storefront features fixed, metal, storefront windows. The storefront features a flat roof with a parapet coped in metal. The dwelling portion features 1/1, metal, double-hung sash windows. There are closed, intersecting gables on the west façade and the north and south elevations that features paired, 1/1, metal, double-hung sash windows. There is a single-leaf, wood door on the north elevation. The roof is hipped-cross-gable clad in slate shingles with a boxed cornice. The dwelling features three, interior, brick chimneys on the north, south, and east elevations.

- This is a one-story store designed in the Modern Movement style and constructed circa 1950. It incorporates a concrete slab foundation and parged concrete block structural system. The façade is

dominated by a storefront comprised of a single-leaf door flanked by concrete block filled storefront window openings. Surmounting the storefront is a parged rectangular panel. The store features an interior, brick chimney with a metal cap.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **2515 Granby Street**
PROPERTY NAME: Gas Station, 2515 Granby Street
OTHER NAME (S):
CONSTRUCTION DATE: 1950
DHR NUMBER (S): 122-5087-1551
DESCRIPTION (S):
This is a gas station designed in the Modern Movement style and constructed in 1950. It incorporates a concrete slab foundation and a parged, concrete block structural system. The northeast corner of the building features a lower roofline than the remaining building. The northeast corner of the building features storefront that is partially clad in wood shingles. The storefront is comprised of a single-leaf, wood door with a light; paired, 1/1, metal, double-hung sash windows with applied bars; and a projecting, metal overhang. There is a storefront window opening on the north elevation of the storefront portion that has been filled with louvered, metal. The south end of the east façade features two garage bays. The bays feature metal, roll-up doors. There is a single-leaf entrance on the west end of the north façade. The roof is flat.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2601 Granby Street**
PROPERTY NAME: House, 2601 Granby Street
OTHER NAME (S):
CONSTRUCTION DATE: 1908
DHR NUMBER (S): 122-5087-1552
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Colonial Revival style and constructed in 1908. It incorporates a brick foundation and structural system. The east façade features a one-story, three-bay porch with an asphalt-shingles, hipped roof; a boxed cornice; modillions on the cornice; and clustered, wood, Tuscan columns resting on a brick balustrade. Wrought iron has been applied between the columns on the porch. The primary entrance is centrally located and has been boarded. The house features 1/1 and 18/1, wood, double-hung sash windows with storm windows. Many of the windows have been boarded. There are hip-roofed dormers on the façade and the north and south elevations that are clad in fish-scale cut, wood shingles. The dormers feature tripartite, 18/1, wood double-hung sash windows and modillions on the cornice. Some of the windows on the dormers have been boarded. The roof is hipped clad in slate shingles with modillions under the wide eaves. The house features interior, brick chimneys with corbelled caps on the north, south, and west elevations. There is a vertical board wall appended to the north elevation of the house to the carriage house. The wall features a roll-up, metal door with lights.

- This is a two-story carriage house designed in the Colonial Revival style and constructed circa 1910. It incorporates a brick foundation and a 7-course, American bond structural system. The carriage house features a wood, roll-up door on the north end of the façade surmounted by a four-course rowlock brick jack arch. The window opening have been boarded and feature 2-course, solider brick, round arch lintels. The roof is flat with a parged parapet. The building features a corbelled cornice.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **2602-2618 Granby Street**
PROPERTY NAME: Auto Dealership, 2602 Granby Street
OTHER NAME (S): Willis Motors/Boobalas
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0117 122-0906
DESCRIPTION (S):
This is a two-story auto dealership designed in the Late 19th and Early 20th Century American Movement style and constructed in 1910. It incorporates a brick foundation and brick structural system that has been parged. The first story features multiple storefront openings divided by brick piers comprised of single-leaf, plate glass doors and plate glass, storefront windows. Metal bars have been applied over the north storefront windows. Parged panels surmount the storefront windows. The second story features tripartite, fixed, metal windows with parged brick window surrounds within the original openings. The roof is flat with a parapet coped in a rowlock brick course. There is a gable-roof parapet on the west end of the north elevation. The first story southwest corner is canted.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2609-2619 Granby Street**
PROPERTY NAME: Auto Dealership, 2609 Granby Street
OTHER NAME (S): Thomas Motor Company/M & G Sales Company
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-0118 122-0907
DESCRIPTION (S):
This is a one-story auto dealership designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a brick foundation and a brick structural system clad in brick veneer. The east façade features filled storefront openings that are clad in brick veneer and surmounted by fixed, metal, plate glass windows. The openings are filled with a recessed, single-leaf door and metal, storefront windows. There are double-leaf, metal doors on the north end of the facade. There is a wood cornice applied to the façade above the fixed, plate glass windows. The portion of the façade above the cornice is clad in vertical board. The roof is flat with a parapet coped in a rowlock brick course.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2710 Granby Street**

PROPERTY NAME: Store, 2710 Granby Street
OTHER NAME (S): Bon Appetit Bakery, Int'l Foods and Subs
CONSTRUCTION DATE: 1947
DHR NUMBER (S): 122-5087-1554
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1947. It incorporates a concrete slab foundation and a concrete block structural system. The west façade is clad in brick veneer. The west facade features three storefronts. The north storefront is comprised of a single-leaf, wood door with a boarded light surmounted by a transom filled with a metal, louvered vent and flanked by window openings filled with vertical board. The central storefront is comprised of a single-leaf, metal, paneled door flanked by window opening that have been filled with vertical board. The south storefront is recessed and features a single-leaf, plate glass door surmounted by a transom and flanked by fixed, metal, storefront windows. There is a roll-up metal, garage door on the south elevation. The roof is flat with a stepped parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2716 Granby Street**
PROPERTY NAME: Store, 2716 Granby Street
OTHER NAME (S):
CONSTRUCTION DATE: 1900
DHR NUMBER (S): 122-5087-1555
DESCRIPTION (S):
This is a two-story store designed in the Late 19th and Early 20th Century American Movement style and constructed in 1900. It incorporates a brick foundation and structural system. The west façade and the north elevation are clad in brick veneer. The west façade features a centrally located, two-story, recessed, canted bay. The first story features a boarded storefront entrance. The second story features an open, single-leaf entrance and a composite-tiled, shed roof. The window and door openings on the first story have been boarded. The northwest corner is canted and features a boarded storefront. The second story features 6/6, metal, double-hung sash windows with rowlock brick sills. The north elevation features a centrally located, recessed, canted bay on the second story. The bay features a single-leaf, metal door and a composite-tiled, shed roof. The roof is flat with a parapet coped in a rowlock brick course. The building features a corbelled cornice.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2800 Granby Street**
PROPERTY NAME: Store, 2800 Granby Street
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1556
DESCRIPTION (S):
This is a two-story store designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a brick foundation and brick structural system. The west façade and the

south elevation have been parged and the building features parged brick beltcourses above the first story storefronts and the second story windows. The west façade features four storefronts. The storefront entrances are comprised of single-leaf, plate glass doors surmounted by parged brick lintels. There is a single-leaf, metal door on the south elevation. The first story windows features fixed metal windows that have been partially filled with concrete block and are surmounted by parged brick lintels. The second story features 1/1, metal, double-hung sash windows. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2808 Granby Street**
PROPERTY NAME: Store, 2808 Granby Street
OTHER NAME (S): Refuge Assembly of Yahweh
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-1557
DESCRIPTION (S):
This is a one-story store designed in the Late 19th and Early 20th Century American Movement style and constructed in 1914. It incorporates a concrete slab foundation and a parged, brick structural system. The west façade features a recessed entrance comprised of a single-leaf, metal door surmounted by a transom filled with an air conditioning unit. The window openings have been filled with vinyl siding. A triangular-shaped, projecting, metal overhang surmounts the storefront. The roof is flat with a parapet coped in metal. There is a shed-roofed addition appended to the east elevation. The addition is features a shed roof clad in asphalt and an interior, brick chimney on the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2811 Granby Street**
PROPERTY NAME: Store, 2811 Granby Street
OTHER NAME (S): New Life Development
CONSTRUCTION DATE: 1953
DHR NUMBER (S): 122-5087-1558
DESCRIPTION (S):
This is a two-story store designed in the Modern Movement style and constructed in 1953. It incorporates a concrete slab foundation and a concrete block structural system. The southeast corner is canted and features a storefront entrance comprised of a single-leaf, wood door with a light surmounted by a transom. The first story of the east facade feature fixed, metal, storefront windows. A projecting, metal overhang surmounts the storefront. The second story side elevations features 2/2, metal, double-hung sash windows. There is a single-leaf, wood, paneled door with six lights on the second story of the south elevation. There is a single-leaf, metal, paneled door on the first story of the south elevation. The roof is flat with a parapet coped in metal. The building features a metal cornice and a wide frieze under the eaves. There is an interior, parged, concrete block chimney on the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3301 Granby Street**
PROPERTY NAME: House, 3301 Granby Street
OTHER NAME (S): Ward, Andrew, House
CONSTRUCTION DATE: 1909
DHR NUMBER (S): 122-5087-0120 122-0140
DESCRIPTION (S):
This is a two-and-one-half story house designed in the Queen Anne style and constructed in 1909. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The east façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; individual and paired, wood, Ionic columns resting on brick pedestals; and turned balusters. The primary entrance is comprised of a single-leaf, wood, paneled door with a light and a storm door surmounted by a diamond-paned transom and flanked by diamond-paned sidelights with wood panels. The house features Queen Anne, wood and metal, double-hung sash windows; and multiple light-Queen Anne, metal, double-hung sash windows. The second story façade features a tripartite window of a 2/2, wood, double-hung sash window flanked by multiple light-Queen Anne, wood, double-hung sash windows. There are two-story, Ionic pilasters appended to all the corners of the house. There is a two-story, projecting, canted bay on the north end of the façade. There is a two-story, projecting, canted bay on the north elevation that features a slate-shingled roof between the first and second stories. There are paired, gable-roofed dormers on the façade. The gable-roofed dormers feature multiple light-Queen Anne, wood, double-hung sash windows surmounted by closed gables with modillions on a common cornice. There is a Queen Anne, wood window and balustrade centrally located between the paired, gable-roofed dormers on the façade. There are gable-roofed dormers on the north and south elevations. The dormers features paired, Queen Anne, wood, double-hung sash windows surmounted by pediments with modillions on the cornice. The roof is deck-on-hip clad in slate shingles with brackets under the wide eaves. The house features a central, interior, brick chimney with a corbelled cap. There is a wood deck appended to the north elevation of the house.

- This is a one-and-one-half-story, two-car garage designed in the Modern Movement style and constructed circa 2000. It incorporates a wood frame structural system clad in vinyl siding. The garage features two metal, paneled, roll-up doors. There is a fixed, metal, 12-light window, surmounted by a fan-shaped window on the second story of the south façade. The roof is gable clad in asphalt shingles with cornice returns.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3309 Granby Street**
PROPERTY NAME: House, 3309 Granby Street
OTHER NAME (S):
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-1565
DESCRIPTION (S):
This is a two-and-one-story house designed in the Queen Anne style and constructed in 1907. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The east façade features a one-story,

wraparound porch with an asphalt-shingled, hipped roof and plain, wood posts and balustrade. A pediment surmounts the porch entrance. The primary entrance is comprised of a single-leaf wood, paneled door with four lights surmounted by a transom. The north end of the east façade features a two-story, projecting, canted bay surmounted by a closed gable. The closed gable features a Palladian window of a fixed, round arch, wood window flanked by one-light, fixed, wood windows and scroll-cut brackets with pendants under the gable eaves. The house features 1/1, metal, double-hung sash windows. There are gable-roofed dormers on the façade and the south elevation that feature paired, metal, casement windows surmounted by closed gables. There is a two-story, projecting, canted bay on the south elevation that is surmounted by a closed gable. The projecting bay features secondary entrance on the east canted wall of the first story. The secondary entrance is comprised of a single-leaf, wood, paneled door with lights surmounted by a transom. There is a two-story, projecting bay on the north elevation that is surmounted by a closed gable. The first story is canted and the second story is squared. The roof is hipped-cross-gable clad in asphalt shingles with a wide frieze under the boxed eaves. The house features an interior, brick chimney with a corbelled cap on the north elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3313 Granby Street**
PROPERTY NAME: House, 3313 Granby Street
OTHER NAME (S):
CONSTRUCTION DATE: 1904
DHR NUMBER (S): 122-5087-0121 122-1097
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1904. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The east façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal door surmounted by a fanlight and flanked by 2-light sidelights. The house features individual and paired, 1/1, metal, double-hung sash windows. There is a two-story, projecting, squared bay on the north end of the façade that is surmounted by a closed gable. The closed gable features a metal, sliding window surmounted by a round arch window, and there are round arch vergeboards with a boxed cornice at the roof apex. A Queen Anne, wood, clerestory window surmounts the paired windows on the second story of the projecting bay. There are gable-roofed dormers on the façade and the north elevation. The dormers feature 1/1, metal, double-hung sash windows surmounted by wood panels carved to resemble fanlights with articulated keystones and cornices returns. There is a two-story, projecting, squared bay on the north elevation that is surmounted by a closed gable and features a two-story, rounded bay. The closed gable features a single-leaf entrance with a plain, wood balustrade that is accessed by a two-and-one-half-story, metal, spiral stair appended to the north elevation. The roof is deck-on-hipped-cross-gable clad in asphalt shingles with a wide frieze under the wide eaves. The house features an interior, brick chimney with a corbelled cap on the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3401 Granby Street**

PROPERTY NAME: House, 3401 Granby Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-0122 122-1098
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1912. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The first story is clad in brick veneer. The east façade features a one-story, wraparound porch with a standing-seam metal, hipped roof; and individual and clustered, wood, Tuscan columns resting on a brick balustrade. A pediment surmounts the porch entrance on the east façade. A portion of the porch on the south elevation has been enclosed with multiple-light windows. The primary entrance is comprised of a single-leaf, metal, paneled door surmounted by an 8-light transom and flanked on the north by a sidelight. The house features 1/1, metal, double-hung sash windows. The first story windows on the façade and the south elevation feature limestone sills and are surmounted by clerestory windows. The southeast corner of the house features a two-and-one-half story, projecting, octagonal tower surmounted by an asphalt-shingled, octagonal roof with wide eaves. There is a two-story, projecting, canted bay on the south elevation that is surmounted by a closed gable. The closed gable features a 1/1, metal, double-hung sash window and brackets under the eaves. There is a two-story, projecting, squared bay on the north elevation that features an exterior, brick chimney. There is a hip-roofed dormer on the façade that features tripartite, 1/1, metal, double-hung sash windows and wide eaves. The roof is hipped-cross-gable with a wide frieze and wide eaves on the east façade and south elevation. The roof features cornice returns on the north elevation. The house features two, interior, brick chimneys with corbelled caps on the south elevation.

- This is a one-story, two-car garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1930. It incorporates a concrete slab foundation and a wood frame structural system clad in brick veneer. The garage features two, metal, paneled, roll-up doors. The roof is hipped clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **3409 Granby Street**
PROPERTY NAME: Store, 3409 Granby Street
OTHER NAME (S): Furniture Store, 3409-3415 Granby Street and 107-113 35th Street/Park Place Medical Center/JM Imports
CONSTRUCTION DATE: 1926
DHR NUMBER (S): 122-5087-1566
DESCRIPTION (S):
This is a one-story store designed in the Late 19th and Early 20th Century American Movement style and constructed in 1926. It incorporates a concrete slab foundation and a concrete block structural system. The east elevation features a brick veneer storefront surmounted by a false, asphalt-shingled, hipped roof. The east elevation is clad in glazed tile. The east façade features a centrally located entrance comprised of double-leaf, plate glass doors surmounted by a transom and flanked by plate glass, storefront windows. A projecting, metal

overhang surmounts the entrance. The north elevation features fixed, metal and plate glass, storefront windows. The roof is flat with a parapet coped in metal.

- This is a two-story store designed in the Modern Movement style and constructed circa 1950. It incorporates a concrete slab foundation and concrete block structural system clad in brick veneer. The first story of the north façade and west elevation feature bricked storefronts. There are two storefronts on the north façade that feature recessed entrances flanked by storefront, plate glass windows. The window opening on the west elevation has been filled with vertical board. There is a recessed sliding window on the north elevation. The storefront is surmounted by a false, asphalt-shingled, hipped roof on the west and north elevations, which extends to the primary building. There is a two-story, projecting, squared bay on the west elevation that features a bricked window opening on the first story and a metal, louvered vent on the second story. The north elevation of the second story features fixed, metal windows with rowlock brick sills. The roof is flat with a parapet coped in metal.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **3601 Granby Street**
PROPERTY NAME: House, 3601 Granby Street
OTHER NAME (S):
CONSTRUCTION DATE: 1905
DHR NUMBER (S): 122-5087-0123 122-1096
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1905. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The building features a one-story, wraparound porch with an asphalt-shingled, hipped roof; square, wood piers; and turned balusters. The primary entrance is centrally located on the first story of the east façade. A secondary entrance is located on the two-story, projecting, canted bay surmounted by a closed gable on the south elevation. The entrances are comprised of a single-leaf, metal doors and a pediment surmounts the south door. The closed gable features a Palladian window of a 1/1, wood, double-hung sash window with a round arch upper sash flanked by 1/1, wood, double-hung sash windows with round arch upper sashes. The projecting bay features 4/4, metal, double-hung sash windows. The house features paired and tripartite, 6/6, metal, double-hung sash windows. Non-functional shutters flank the first story windows. There is an intersecting, closed gable on the north end of the east facade that features a 4-light, wood, casement window. There are hip-roofed dormers on the façade and the south elevation that feature 1/1, metal, double-hung sash windows. There is a two-story, projecting, squared bay on the north elevation surmounted by a hipped roof. The roof is hipped-cross-gable clad in asphalt shingles. The house features a central, interior, brick chimney with a corbelled cap and an interior, brick chimney on the south façade. This house has been converted into an apartment building.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3607 Granby Street**
PROPERTY NAME: House, 3607 Granby Street
OTHER NAME (S):

CONSTRUCTION DATE: 1909
DHR NUMBER (S): 122-5087-0124 122-1095
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1909. It incorporates a brick foundation and a wood frame structural system. The first story is clad in brick veneer and the second story is clad in vinyl siding. The east façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; wood, Tuscan columns; and a plain, wood balustrade. There are two entrances located on the north end of the east façade. The south entrance is comprised of a single-leaf, metal door with an oval-shaped light surmounted by a transom and flanked by sidelights. The north entrance is comprised of a single-leaf, metal, paneled door with a light surmounted by a transom. The house features 1/1 and 12/1, wood, double-hung sash windows with storm windows. There are two, one-story, projecting, canted bays on the second story of the east façade. There is a one-story, projecting, squared bay on the second story of the south elevation that is surmounted by a closed gable. The projecting bay features a single-leaf entrance that is accessed by a wood stair appended to the south elevation. There is a one-story, projecting, canted bay on the north elevation that features a single-leaf, wood door with a light accessed by wood stairs. There are gable-roofed dormers on the façade and the north elevation. The dormers features Queen Anne, wood, double-hung sash windows surmounted by pediments. The roof is hipped-cross-gable clad in asphalt shingles with a wide frieze under the wide eaves. The house features an interior, brick chimney on the south elevation. This house has been converted into an apartment building.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3611 Granby Street**
PROPERTY NAME: House, 3611 Granby Street
OTHER NAME (S):
CONSTRUCTION DATE: 1907
DHR NUMBER (S): 122-5087-0125 122-1094
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1907. It incorporates a parged brick foundation and a wood frame structural system clad in aluminum siding. The east façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal door surmounted by a transom. There is an intersecting gable on the north end of the east façade. The house features individual and paired, 1/1, metal, double-hung sash windows. There is a balcony on the second story façade that features a plain, wood balustrade and is accessed by a single-leaf, wood, paneled door. The façade gable is closed and features a 6/6, metal, double-hung sash window. There is a two-story, projecting, canted bay on the south elevation that is surmounted by a closed gable. The projecting bay features a single-leaf, metal door on the east canted wall. The roof is gable clad in asphalt shingles with a boxed cornice. The house features a central, interior, brick chimney. This house has been converted into an apartment building.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3701 Granby Street**
PROPERTY NAME: House, 3701 Granby Street
OTHER NAME (S):
CONSTRUCTION DATE: 1909
DHR NUMBER (S): 122-5087-0126 122-1092
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1909. It incorporates a brick foundation and structural system. The east façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; a wide frieze; square, wood columns; and turned balusters. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a transom. The house features 1/1 and 2/1, wood, double-hung sash windows with storm windows and limestone sills. Brick flat arches with articulated keystones surmount the windows. There is a two-story, projecting, canted bay on the north end of the east façade that is surmounted by a closed gable. The closed gable is clad in wood shingles and features a Queen Anne, wood, double-hung sash window with a round arch upper sash and modillions on the raking cornice. The southeast corner of the house is canted. There is a two-story, projecting, canted bay on the south elevation that is surmounted by a closed gable. The closed gable is clad in vinyl siding and features a Queen Anne, wood, double-hung sash window with a round arch upper sash and modillions under the eaves. There is a one-story, one-bay porch on the west elevation of the canted bay that features a wood, handicap ramp; a wide frieze; and square, wood columns. There are gable-roofed dormers on the façade and the south elevation. The dormers features Queen Anne, wood, double-hung sash windows with round arch upper sashes and cornice returns. The roof is deck-on-hipped-cross-gable clad in slate shingles with a wide frieze and modillions on the cornice. The house features an interior, brick chimney on the west elevation. There is a one-story, brick ell appended to the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3721 Granby Street**
PROPERTY NAME: Apartment Building, 3721 Granby Street
OTHER NAME (S): Parkwood Court, 3709-3715 Granby Street/Camellia Court/Multiple Dwelling, 3721 Granby Street
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-0127 122-1039
DESCRIPTION (S):
This is a three-story apartment building designed in the Late 19th and Early 20th Century American Movement and constructed in 1914. It incorporates a brick foundation and a 7-course, American bond brick structural system. The building occupies a U-shaped footprint on the property and features brick quoins. The east façade features three-story, one-bay porches on the façade of each projecting wing. The porches feature asphalt-shingled, hipped roofs; brick piers; and plain, wood balustrades. The south elevation of the north wing and the north elevation of the south wing feature three-story, one-bay porches with asphalt-shingled, hipped roofs; brick piers; and plain, wood balustrades. The central portion of the building features two, three-story, one-bay porches incorporated under a common roof. The porches feature brick piers; and plain, wood balustrades.

Primary entrances are centrally located on the east elevation of the central portion, north elevation of the south wing and south elevation of the north wing. The entrances are comprised of double-leaf, plate glass doors surmounted by a round arch transom. The building features individual and paired, 9/1 and 1/1, metal, double-hung sash windows with limestone and rowlock brick sills. Soldier-course brick lintels surmount the windows. There is a three-story, projecting, squared bay on the north elevation that features a metal, fire escape incorporated under the main roof. The building features an exterior, brick chimney on the north elevation. The roof is flat with a parapet coped in a rowlock brick course. There is a boxed cornice applied to the east façade of the building with cornice returns on the north and south elevations. This apartment building has been converted into owner-occupied units.
CONTRIBUTING (1 - building)

Hampton Boulevard

PROPERTY ADDRESS: **2400 Hampton Boulevard**
PROPERTY NAME: Norfolk Linen Service
OTHER NAME (S): National Linen Service
CONSTRUCTION DATE: 1941
DHR NUMBER (S): 122-5087-0128 122-0910
DESCRIPTION (S):
This is a two-story manufacturing facility designed in the Art Deco style and constructed in 1941. It incorporates a brick foundation and brick structural system. The primary entrance is located on the west façade and is flanked by curved walls and comprised of a double-leaf, plate glass and metal doors. A projecting, metal overhang supported by metal posts surmounts the entrance. The southwest corner of the building is curved and features glass block windows. The building features metal, industrial sash windows. Cloth awnings surmount some of the windows on the south elevation. There is a roll-up metal door on the north end of the west façade. The north elevation features a metal, roll-up door and boarded windows. The north elevation features an intersecting gable. The roof is monitor clad in asbestos siding. There is an oversized, shed-roofed vent on the north elevation of the monitor.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2500 Hampton Boulevard**
PROPERTY NAME: Nolde Brothers Inc.
OTHER NAME (S):
CONSTRUCTION DATE: 1939
DHR NUMBER (S): 122-5087-0129 122-0477
DESCRIPTION (S):
This is a one-story manufacturing facility designed in the Art Deco style and constructed in 1939. It incorporates a brick foundation and a brick structural system clad in brick veneer. The primary entrance is located on the west façade and is comprised of a single-leaf door surmounted by a transom and flanked by

projecting, squared, brick piers. The west façade features rectangular and circular window openings and door openings filled with vertical board. The south elevation features a single-leaf, metal door; two, roll-up metal doors; and metal, industrial sash windows. The roof is flat with a parapet. The west façade and the south elevation feature the words "NOLDE BROTHERS INC" in brick mounted on the parapet. The parapet is coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2514 Hampton Boulevard**
PROPERTY NAME: Manufacturing Facility, 2514 Hampton Boulevard
OTHER NAME (S): Sanitary Linen Service
CONSTRUCTION DATE: 1928
DHR NUMBER (S): 122-5087-1569
DESCRIPTION (S):
This is a one-story manufacturing facility designed in the Late 19th and Early 20th Century American Movement style and constructed in 1928. It incorporates a brick foundation and a structural system. The primary entrance is located on the west façade and is comprised of a single-leaf, plate glass door flanked on the north by a fixed, plate glass, storefront window. The building features fixed, metal windows with rowlock brick sills. The north and south elevations feature industrial, metal sash windows. The southwest wall corner features a canted wall. The north elevation features two garage bays surmounted by asphalt-shingled, pent roofs supported by brackets. The roof on the west portion of the building is flat with a parapet coped in a rowlock brick course. The east portion of the building features a gable roof clad in asphalt shingles. There is a one-story, open loading dock appended to the east elevation of the building. The loading dock incorporates a concrete block structural system clad in tile and features a flat, corrugated metal roof.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2700 Hampton Boulevard**
PROPERTY NAME: Store, 2700 Hampton Boulevard
OTHER NAME (S): Ace Cash Express
CONSTRUCTION DATE: 1953
DHR NUMBER (S): 122-5087-1570
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1953. It incorporates a concrete slab foundation and a parged, concrete block structural system. The west façade features two entrances. The north entrance is recessed and comprised of a single-leaf, plate glass door surmounted by a transom and flanked on the north by a sidelight. The south entrance is comprised of a single-leaf, plate glass door surmounted by a transom. The building features fixed, plate glass, storefront windows. There are one-story, projecting, squared blocks appended to the north and south elevations. The roof is flat with a parapet coped in metal.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3602 Hampton Boulevard**
PROPERTY NAME: Warehouse, 3602 Hampton Boulevard
OTHER NAME (S): Sanitary Linen Service
CONSTRUCTION DATE: 1951
DHR NUMBER (S): 122-5087-1571
DESCRIPTION (S):
This is a one-story warehouse designed in the Modern Movement style and constructed in 1951. It incorporates a concrete slab foundation and a parged, concrete block structural system. The west façade features a recessed, single-leaf entrance. There are fixed, metal clerestory windows surmounting a parged window opening on the west façade. There is a garage bay on the east elevation that features a metal, roll-up door. The roof is flat with a parapet coped in metal. The building features an interior, parged brick chimney embedded in the north elevation wall.

- This is a one-story warehouse designed in the Modern Movement style and constructed in 1951. It incorporates a concrete slab foundation and a parged, concrete block structural system. There is a garage bay on the south elevation that features a metal, roll-up door. The roof is flat with a parapet coped in metal.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **3700 Hampton Boulevard**
PROPERTY NAME: Store, 3700 Hampton Boulevard
OTHER NAME (S): Sport Cycle
CONSTRUCTION DATE: 1944
DHR NUMBER (S): 122-5087-1572
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1944. It incorporates a concrete slab foundation and a parged, concrete block structural system. The east end of the north elevation is clad in brick veneer. The south elevation features the primary entrance comprised of double-leaf, plate glass doors. The building features fixed, multiple-light windows surmounted by cloth awnings. The west façade features a boarded window opening and a fixed, metal multiple light window surmounted by a cloth awning. The roof is flat with a parapet coped in metal. There is a one-story, addition appended to the east end of the south elevation. The addition features a flat roof and an interior, brick chimney. The south elevation of the addition features a garage bay with a metal, roll-up door.

- This is a three-story, metal framed sign constructed in 1944. Interior lights illuminate it.

CONTRIBUTING (1 - building)
CONTRIBUTING (1 - structure)

Hubbard Street

PROPERTY ADDRESS: **Hubbard Street**
PROPERTY NAME: Hubbard Park
OTHER NAME (S):
CONSTRUCTION DATE: circa 1900
DHR NUMBER (S): 122-5087-1574
DESCRIPTION (S):
This is a park constructed circa 1900. The park is comprised of 2.4 acres of open space. It is grass-covered and flat.
CONTRIBUTING (1 - site)

Killam Avenue

PROPERTY ADDRESS: **2700 Killam Avenue**
PROPERTY NAME: House, 2700 Killam Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-1575
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1914. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The west façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a storm door. The house features individual and paired, 1/1, metal, double-hung sash windows. The façade gable is clad in wood shingles and features a rectangular-shaped, wood, louvered vent. There is a one-story, one-bay porch on the north elevation. The porch is comprised of an asphalt-shingled, shed roof and plain, wood posts and balustrade. There is a single-leaf door with a storm door on the north elevation. There is an intersecting, closed gable on the south elevation. The closed gable is clad in wood shingles. The roof is gable clad in asphalt shingles with cornice returns.

- This is a one-story shed designed in the Modern Movement style and constructed circa 1970. It incorporates a wood frame structural system clad in vinyl siding. The shed features a single-leaf, wood door. The roof is side gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3300 Killam Avenue**
PROPERTY NAME: Duplex, 3300 Killam Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1950
DHR NUMBER (S): 122-5087-1576

DESCRIPTION (S):
This is a one-story duplex designed in the Modern Movement style and constructed in 1950. It incorporates a brick foundation and a brick structural system. The west façade features two entrances comprised of single-leaf, metal, paneled doors with storm door. Asphalt-shingled, gabled-roof overhangs supported by wood brackets surmount the entrances. The entrances are access by brick stairs with plain, wood balustrades. The duplex features individual and paired, 6/6, metal, double-hung sash windows with rowlock brick sills. The roof is side gable clad in asphalt shingles. The side elevation gables are clad in vinyl siding. The duplex features a central, interior, brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3509 Killam Avenue**
PROPERTY NAME: House, 3509 Killam Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1577
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The east façade features a one-story, three-bay porch with an asphalt-shingled, hipped roof and aluminum-clad piers and balustrade. The primary entrance is comprised of a single-leaf, wood door with a storm door surmounted by a transom. The house features 6/1, wood, double-hung sash windows with storm windows. There is a hip-roofed dormer on the façade that features paired, 6-light, wood, casement windows and wide eaves. The roof is hipped clad asphalt shingles with wide eaves. The house features an interior, brick chimney on the south elevation. There is a one-story, shed-roofed ell appended to the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3511 Killam Avenue**
PROPERTY NAME: House, 3511 Killam Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1578
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The east façade features a one-story, one-bay porch with an asphalt-shingled, hipped roof and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door surmounted by a transom. The house features 1/1, metal, double-hung sash windows. Non-functional shutters flank the first story façade windows. There is a hip-roofed dormer on the façade that features paired, wood, casement windows that have been boarded and exposed, wood rafters under the eaves. The roof is hipped clad asphalt shingles with wide eaves. The house features an interior, brick chimney with a corbelled cap on the south elevation. There is a one-story, shed-roofed ell

appended to the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3605 Killam Avenue**
PROPERTY NAME: House, 3605 Killam Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1921
DHR NUMBER (S): 122-5087-1579
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1921. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The east façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; a metal awning; wood, Tuscan columns; and a wrought iron balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows. Metal awnings surmount the façade, and the north and south elevation windows. The roof is hipped clad asphalt shingles with wide eaves. The house features a central, interior, parged brick chimney with a corbelled cap. There is a one-story, two-bay porch incorporated in the building on the southwest corner of the house. The porch is comprised of a metal awning; plain, wood posts; and a wrought iron balustrade.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3607 Killam Avenue**
PROPERTY NAME: House, 3607 Killam Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-1580
DESCRIPTION (S):
This is a two-story house designed in the Colonial Revival style and constructed in 1922. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The east façade features a one-story, one-bay porch with an asphalt-shingled, hipped roof; a metal awning; and wrought iron posts and balustrade. The primary entrance is comprised of a single-leaf door with a wrought iron storm door. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The roof is hipped clad asphalt shingles with wide eaves. The house features an exterior, brick chimney on the west elevation. There is a single-leaf door on the west elevation that is surmounted by an asphalt-shingled shed roof supported by wrought iron posts.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1925. It incorporates a wood frame structural system clad in asbestos siding. The garage features a metal, paneled, roll-up door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **3609 Killam Avenue**
PROPERTY NAME: House, 3609 Killam Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1581
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The east façade features a one-story porch incorporated under the main roof. The porch is two bays and features clustered, wood posts resting on wood-shingled pedestals and a wood-shingled balustrade. There is a shed-roofed dormer on the façade sheltering a porch. This porch features wood posts resting on a wood shingled balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with eight lights. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. The roof is side gable clad in asphalt shingles.

- This is a one-story garage designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1925. It incorporates a wood frame structural system clad in wood shingles. The garage features a double-leaf, wood door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

Lamberts Point Road

PROPERTY ADDRESS: **1030 Lamberts Point Road**
PROPERTY NAME: House, 1030 Lamberts Point Road
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1583
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The south façade features a one-story, wraparound porch with an asphalt-shingled, hipped roof; square, wood, fluted columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door. The house features 1/1, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles with cornice returns.
CONTRIBUTING (1 - building)

Llewellyn Avenue

PROPERTY ADDRESS: **2501 Llewellyn Avenue**
PROPERTY NAME: Store, 2501 Llewellyn Avenue
OTHER NAME (S): Holy Trinity Outreach Ministry
CONSTRUCTION DATE: 1948
DHR NUMBER (S): 122-5087-1584
DESCRIPTION (S):
This is a two-story store designed in the Modern Movement style and constructed in 1948. It incorporates a concrete slab foundation and a concrete block structural system clad in brick veneer. The east façade features four entrances. The south entrance is comprised of double-leaf, plate glass door surmounted by a transom. The adjacent entrance is comprised of a single-leaf, metal door. The two north entrances are comprised of a single-leaf, metal doors with two lights. The first story features fixed, metal storefront windows. The second story features 2/2, metal, double-hung sash windows with rowlock brick sills. The roof is flat with a parapet coped in a rowlock brick course.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2600 Llewellyn Avenue**
PROPERTY NAME: Apartment Building, 2600 Llewellyn Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1982
DHR NUMBER (S): 122-5087-1585
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1982. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in brick veneer. The primary entrance is centrally located on the west facade and is comprised of a single-leaf, metal, paneled door. The building features paired, 6/6, metal, double-hung sash windows with rowlock brick sills. Non-functional shutters flank the facade windows. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2815 Llewellyn Avenue**
PROPERTY NAME: Apartment Building, 2815 Llewellyn Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 2000
DHR NUMBER (S): 122-5087-1586
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 2000. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in brick veneer. The building is comprised of three bays. The central bay features a centrally located entrance comprised of a single-leaf, metal, paneled door with two lights. The roof of the central bay is side gable clad in asphalt shingles. The flanking bays are comprised of one-and-one-half-story, asphalt-shingled, steeply pitched, side-gable-roofed blocks with gable-roofed dormers on the façade. The flanking bays features single-leaf, metal

paneled doors. The gable-roofed dormers are clad in vinyl siding and features 1/1, metal, double-hung sash windows. The building features 1/1, metal, double-hung sash windows with rowlock brick sills. Non-functional shutters flank the windows.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2905 Llewellyn Avenue**
PROPERTY NAME: Apartment Building, 2905 Llewellyn Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 2000
DHR NUMBER (S): 122-5087-1587
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 2000. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in brick veneer. The building is comprised of three bays. The central bay features a centrally located entrance comprised of a single-leaf, metal, paneled door with two lights. The central bay is flanked by two-story, projecting, squared bays surmounted by intersecting gables. The flanking bays features single-leaf, metal paneled doors. The building features 1/1, metal, double-hung sash windows with rowlock brick sills. Non-functional shutters flank the windows. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2909 Llewellyn Avenue**
PROPERTY NAME: Apartment Building, 2909 Llewellyn Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1984
DHR NUMBER (S): 122-5087-1588
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1984. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in brick veneer. The primary entrance is centrally located on the east facade and is comprised of a single-leaf, metal, paneled door with two lights. The building features paired, 1/1, metal, double-hung sash windows with rowlock brick sills. Non-functional shutters flank the facade windows. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3001 Llewellyn Avenue**
PROPERTY NAME: Apartment Building, 3001 Llewellyn Avenue
OTHER NAME (S): Llewellyn Shore
CONSTRUCTION DATE: 1986
DHR NUMBER (S): 122-5087-1589
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1986. It

incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in brick veneer. The primary entrance is centrally located on the east facade and is comprised of a single-leaf, metal, paneled door with two lights. The building features paired, 9/9, metal, double-hung sash windows with rowlock brick sills. Non-functional shutters flank some of the windows. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3210 Llewellyn Avenue**
PROPERTY NAME: Apartment Building, 3210 Llewellyn Avenue
OTHER NAME (S): Woodin Apartments
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1590
DESCRIPTION (S):
This is a two-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1916. It incorporates a concrete slab foundation and a concrete block structural system clad in rusticated concrete block. The west elevation features two, two-story, one-bay porches flanking a central, projecting entrance bay. The porches feature asphalt-shingled, shed roofs; rusticated concrete block-clad piers resting on rusticated concrete block-clad pedestals; and wood balustrades. The porches are accessed by single-leaf doors with storm doors. The entrance bay features a centrally located, double-leaf, metal door. The bay is surmounted by a gable roof and flanked by rusticated concrete block-clad pilasters. The building features paired, 1/1, metal, double-hung sash windows. The roof is flat with a stepped parapet coped in metal.
CONTRIBUTING (1 - building)

Monticello Avenue

PROPERTY ADDRESS: **2300 Monticello Avenue**
PROPERTY NAME: Office/Warehouse, 2300 Monticello Avenue
OTHER NAME (S): Decker and Company Scrap Metal and Recycling
CONSTRUCTION DATE: 1940
DHR NUMBER (S): 122-5087-1592
DESCRIPTION (S):
This is a one-story office designed in the Colonial Revival style and constructed in 1940. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The west façade features a single-leaf, boarded entrance surmounted by an asphalt-shingled, gable roof supported by wood brackets. The building features 3/1, wood, double-hung sash windows. The roof is side gable clad in asphalt shingles with exposed, wood rafters under the eaves. The building features a central, interior, brick chimney with a corbelled cap.

- This is a large-scale, one-story warehouse designed in the Modern Movement and constructed circa 1945. It incorporates a metal frame structural system clad in corrugated metal. The roof is side gable clad in corrugated metal.

- This is a large-scale, one-story warehouse designed in the Modern Movement and constructed circa 1955. It incorporates a metal frame structural system clad in corrugated metal. The roof is side gable clad in corrugated metal. There is a metal, roll-up door on the north elevation. The south end of the building exhibits a taller roofline than the north end.

CONTRIBUTING (3 - buildings)

PROPERTY ADDRESS: **2401 Monticello Avenue**
PROPERTY NAME: Store, 2401 Monticello Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1950
DHR NUMBER (S): 122-5087-1593
DESCRIPTION (S):
This is a one-story store designed in the Modern Movement style and constructed in 1950. It incorporates a concrete slab foundation and a concrete block structural system. The east façade is clad in brick veneer. The primary entrance is centrally located and is comprised of double-leaf, metal doors flanked by glass block windows. The building features metal, awning windows. There is an additional storefront on the south elevation. This storefront is comprised of double-leaf doors and fixed, metal, plate glass windows surmounted by a cloth awning. A metal fence surrounds the entrance to this storefront. The south elevation features two, metal, roll-up garage doors and three, single-leaf, metal doors. The roof is flat with a stepped parapet coped in metal.
CONTRIBUTING (1 - building)

Morton Avenue

PROPERTY ADDRESS: **2714 Morton Avenue**
PROPERTY NAME: Apartment Building, 2714 Morton Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1985
DHR NUMBER (S): 122-5087-1606
DESCRIPTION (S):
This is a one-story apartment building designed in the Modern Movement style and constructed 1985. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in brick veneer. The west façade features two entrances comprised of single-leaf, metal, paneled doors accessed by brick stairs with wood balustrades. The building features 1/1, metal, double-hung sash windows with rowlock brick sills. Non-functional shutters flank the windows. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

Munson Street

PROPERTY ADDRESS: **Munson Street**
PROPERTY NAME: Munson Park
OTHER NAME (S):
CONSTRUCTION DATE: circa 1900
DHR NUMBER (S): 122-5087-1607
DESCRIPTION (S):
This is a park designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1900. The park is open and features a centrally located playground; mature trees; wood benches; and a concrete sidewalk. There is a basketball on the west end of the park that is comprised of a concrete slab foundation with two, freestanding, metal baskets. There is a chain-linked fence that surrounds the perimeter of the park.
CONTRIBUTING (1 - site)

PROPERTY ADDRESS: **2604 Munson Street**
PROPERTY NAME: House, 2604 Munson Street
OTHER NAME (S):
CONSTRUCTION DATE: 1912
DHR NUMBER (S): 122-5087-1608
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1912. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The west façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof with wood, Tuscan columns and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door. The house features individual and paired, 1/1, metal, double-hung sash windows. The south end of the west façade features a two-story, projecting, canted bay surmounted by a closed gable. The closed gable features paired, fixed, metal, round arch windows. The roof is hipped clad in asphalt shingles with wide eaves. The house features an interior, parged, brick chimney with a corbelled cap on the south elevation. There is a one-story porch appended to the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2608 Munson Street**
PROPERTY NAME: Apartment Building, 2608 Munson Street
OTHER NAME (S):
CONSTRUCTION DATE: 1951
DHR NUMBER (S): 122-5087-1609
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1951. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The west façade features a two-story, three-bay porch with an asphalt-shingled, hipped roof; square, wood columns; and plain, wood balustrades. The second story porch features a metal awning. There are three entrances centrally located

on the west façade. The entrances are comprised of single-leaf, wood paneled doors with storm doors. There are two single-leaf doors with storm doors accessing the second story porch. The building features individual and paired, 2/2, wood, double-hung sash windows with storm windows. The façade gable features a 2/2, wood, double-hung sash window. The roof is gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2612 Munson Street**
PROPERTY NAME: Duplex, 2612 Munson Street
OTHER NAME (S): Flats, 2612 Munson Street
CONSTRUCTION DATE: 1919
DHR NUMBER (S): 122-5087-1610
DESCRIPTION (S):
This is a two-story duplex designed in the Late 19th and Early 20th Century American Movement style and constructed in 1919. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The west façade features a two-story porch incorporated under the main roof. The first story porch is three bay and features square, wood columns and a vinyl-clad balustrade. The second story porch is two bay and features square, wood columns and a vinyl-clad balustrade. The second story porch is accessed by a single-leaf door with a storm door. There are two entrances on the west façade that are comprised of single-leaf, wood, paneled doors with six lights. The south entrance features a storm door. The duplex features 6/1, wood, double-hung sash windows with storm windows. The façade gable features a rectangular, metal, louvered vent. There is a single-leaf, wood door on the south elevation. The roof is Jerkinhead-gable clad in asphalt shingles.
CONTRIBUTING (1 - building)

Newport Avenue

PROPERTY ADDRESS: **2611 Newport Avenue**
PROPERTY NAME: Apartment Building, 2611 Newport Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1955
DHR NUMBER (S): 122-5087-1611
DESCRIPTION (S):
This is a one-story apartment building designed in the Modern Movement style and constructed in 1955. It incorporates a concrete slab foundation and a concrete block structural system. The building occupies an L-shaped footprint on the property. The east façade features two entrances comprised of single-leaf, wood, paneled doors with six lights and storm doors. There is a single-leaf, wood, paneled door with six lights and a wrought iron storm door on the north elevation. The building features 2/2, wood, double-hung sash windows with storm windows. Non-functional shutters flank the windows on the east façade and the north elevation. The roof is cross-gable clad in asphalt shingles. There are asbestos shingles in the south gable.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3600 Newport Avenue**
PROPERTY NAME: Apartment Building, 3600 Newport Avenue
OTHER NAME (S):
CONSTRUCTION DATE: circa 1960
DHR NUMBER (S): 122-5087-1612
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed circa 1960. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in brick veneer. The east façade features a centrally located, recessed entrance comprised of a single-leaf, metal door surmounted by a tiled brise-soleil and flanked by stack-bond brick courses. The building features metal, sliding windows with rowlock brick sills. There is a centrally located entrance on the west elevation that is comprised of a single-leaf, metal door surmounted by a wood brise-soleil and flanked by stack-bond brick courses. Air conditioning units punctuate that façade and the west elevation. The roof is flat with a parapet coped in metal.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3601 Newport Avenue**
PROPERTY NAME: House, 3601 Newport Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1613
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed 1916. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The east façade features a two-story, one-bay porch with an asphalt-shingled, gable roof. The first story porch features square, wood piers and a plain, wood balustrade. The second story porch has been screened and features square, wood piers and a plain, wood balustrade. The primary entrance is centrally located on the façade and is comprised of a single-leaf door with a storm door surmounted by a transom and flanked by sidelights. The house features individual and paired, 9/1, wood, double-hung sash windows with storm windows. There is a one-story, projecting, squared oriel on the first story of the north elevation. There is a one-story, projecting, squared porch appended to the south elevation. The porch has been screened and features square, wood piers. The façade features an intersecting shed roof bisected by an intersecting gable roof. The roof is side gable clad in asphalt shingles. There is a one-story, shed-roofed ell appended to the west elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1960. It incorporates a wood frame structural system clad in vinyl siding. The garage features double-leaf, wood doors. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3605 Newport Avenue**
PROPERTY NAME: House, 3605 Newport Avenue
OTHER NAME (S): Hebrew Academy
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1614
DESCRIPTION (S):
This is a two-story house designed in the Late 19th and Early 20th Century American Movement style and constructed 1920. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The east façade features a one-story, three-bay porch incorporated under a shed roof extension of the main roof. The porch features plain, wood posts resting on an asbestos-clad balustrade. The primary entrance is centrally located on the façade and is comprised of a single-leaf, wood door with a storm door surmounted by a transom and flanked by boarded sidelights. The house features individual and paired, 1/1, wood, double-hung sash windows with storm windows. There is a one-story, projecting, squared oriel on the first story of the north elevation. There are wood stairs appended to the north elevation accessing a second story entrance. There is a shed-roofed overhang sheltering the second story entrance that is supported by plain, wood posts. There is an oversized shed-roofed dormer on the façade that shelters an enclosed second story porch. The second story porch features paired, 1/1, metal, double-hung sash windows; plain, wood posts; and an asbestos-clad balustrade. The second story porch is accessed by a single-leaf, wood door with multiple lights. The roof is side gable clad in asphalt shingles with exposed, wood rafters under the eaves.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3611 Newport Avenue**
PROPERTY NAME: House, 3611 Newport Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1615
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed 1916. It incorporates a brick foundation and a wood frame structural system clad in aluminum siding. The east façade features a one-story porch. The porch is incorporated under the main roof and is one bay. The porch features wood-shingled piers and a plain, wood balustrade. On the north end of the east façade, there is a shallow porch with a shed roof and false-gable applied to the north elevation. This porch features plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, wood, paneled door with a storm door. The house features individual and paired, 12/1, wood, double-hung sash windows with storm windows. There is a one-story, projecting, canted bay on the first story of the south elevation. There is an oversized gable-roofed dormer on the façade that is clad in wood shingles and aluminum siding. The dormer features 6/6, metal, double-hung sash windows. The roof is side gable clad in asphalt shingles and exposed rafters under the eaves. There is a one-story, shed-roofed ell appended to the west elevation that features a false gable roof. There is also a one-story, vinyl-clad ell appended to the west elevation of the shed-roofed ell.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3615 Newport Avenue**
PROPERTY NAME: House, 3615 Newport Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1616
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed 1916. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The east façade features a one-story, two-bay porch incorporated under the main roof. The porch features wood-shingled piers and a wood balustrade. The primary entrance is comprised of a single-leaf, wood door with multiple lights and a storm door surmounted by a multiple-light transom and flanked by 12-light sidelights. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the first story façade and south elevation windows. There is a one-story, projecting, canted bay on the first story of the south elevation that is surmounted by a gable roof. There is an oversized shed-roofed dormer on the façade that shelters a second story porch. The second story porch features wood-shingled piers and a wood balustrade. The second story porch is accessed by a centrally located, single-leaf door with a storm door. The roof is side gable clad in asphalt shingles with brackets under the rakes. The house features an exterior, brick chimney on the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3702 Newport Avenue**
PROPERTY NAME: House, 3702 Newport Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1617
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1916. It incorporates a parged brick foundation and a wood frame structural system clad in vinyl siding. The west façade features a two-story porch with an asphalt -shingled, shed roof. The first story porch features a false, asphalt-shingled, hipped roof; vinyl-clad piers; and a vinyl-clad balustrade. The second story porch has been enclosed with vinyl siding punctuated by paired, 3/3, wood, double-hung sash windows. The primary entrance is comprised of a single-leaf door with a storm door flanked by boarded sidelights and surmounted by a multiple-light transom. The house features 1/1, metal, double-hung sash windows. There is a hip-roofed dormer on the façade that features a one-light, wood casement window and a rectangular, metal, louvered vent. The roof is hipped-side-gable clad in asphalt shingles. There is a one-story, shed-roofed, screened porch appended to the east elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1970. It incorporates a wood frame structural system clad in pressure treated lumber. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)

NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3703 Newport Avenue**
PROPERTY NAME: House, 3703 Newport Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-1618
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1922. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The east façade features a two-story porch with an asphalt-shingled, hipped roof. The first story porch features a false, asphalt-shingled, hipped roof; wood-shingled piers; and a wood-shingled balustrade. The second story porch has been enclosed with asbestos siding punctuated by paired, 1/1, metal, double-hung sash windows. The primary entrance is comprised of a single-leaf door with a storm door flanked by 6-light sidelights and surmounted by a 5-light transom. The house features 1/1, metal, double-hung sash windows. There is a one-story, projecting, canted bay on the first story façade that features a fixed, one-light, metal window flanked by 1/1, metal, double-hung sash windows. There is a hip-roofed dormer on the façade that features paired, 1/1, metal, double-hung sash windows and wide eaves. The roof is side gable clad in asphalt shingles with cornice returns. There is a one-story, shed-roofed ell appended to the west elevation. The house features an exterior, brick chimney on the north elevation that has been parged above the roofline.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3706 Newport Avenue**
PROPERTY NAME: House, 3706 Newport Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1619
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system. The first story is clad in brick veneer and the second story is clad in wood shingles. The west façade features a two-story porch incorporated under a shed roof extending from the main roof. The first story porch features a false, asphalt-shingled, hipped roof with exposed, wood rafters under the eaves; cloth awnings; brick piers; and a plain, wood balustrade. The second story porch has been enclosed with wood shingles punctuated by metal, sliding windows. The primary entrance is comprised of a single-leaf, wood door with one light and a six-light storm door surmounted by a transom and flanked by sidelights. The house features individual and paired, 6/1, wood, double-hung sash windows with storm windows. The first story windows feature rowlock brick sills. The house features foundation windows on the north and south elevations. There is single-leaf door with a storm door on the north elevation. There is a gable-roofed, wood-shingled dormer on the façade that features tripartite, 6/1, wood, double-hung sash windows with storm windows; exposed, wood rafters under the eaves; and bracket under the rakes. The roof is side gable

clad in asphalt shingles with brackets under the rakes. There is a one-story, shed-roofed ell appended to the east elevation that is clad in wood shingles. The house features an interior, brick chimney with a corbelled cap on the south elevation.

- This s a one-story shed designed in the Craftsman style and constructed circa 1920. It incorporates a wood frame structural system clad in wood shingles. The shed features a single-leaf, wood, paneled door. The roof is gable clad in asphalt shingles.

CONTRIBUTING (2 - buildings)

PROPERTY ADDRESS: **3709 Newport Avenue**
PROPERTY NAME: House, 3709 Newport Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1620
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1918. It incorporates a brick foundation and a wood frame structural system that has been stuccoed. The east façade features a two-story porch incorporated under the main roof. The first story porch features a false, asphalt-shingled, hipped roof; battered, wood piers resting on stuccoed brick pedestals; and a plain, wood balustrade. The second story porch has been enclosed and is clad in stucco punctuated by 1/1, paired, metal, double-hung sash windows. The primary entrance is comprised of a single-leaf door with a storm door flanked by 5-light sidelights and surmounted by a multiple-light transom. The house features 1/1, wood, double-hung sash windows with storm windows and stuccoed brick sills. The house features foundation windows on the north and south elevations. There is a gable-roofed dormer on the façade that features a paired, 1/1, wood, double-hung sash windows, and exposed, wood rafters under the eaves. The roof is side gable clad in asphalt shingles. The house features an interior, parged brick chimney on the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3711 Newport Avenue**
PROPERTY NAME: House, 3711 Newport Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1918
DHR NUMBER (S): 122-5087-1621
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1918. It incorporates a parged brick foundation and a wood frame structural system clad in vinyl siding. The east façade features a two-story porch incorporated under the main roof. The first story porch features a false, composite-tiled, hipped roof with exposed, wood rafters under the eaves; clustered and battered, wood piers resting on parged brick pedestals; and a plain, wood balustrade. The second story features clustered and battered wood piers resting on a vinyl-clad balustrade. The second story porch is accessed by a single-leaf door. The primary entrance is comprised of a single-leaf, metal, paneled door with a storm door flanked by 3-light and wood-paneled

sidelights. The house features 1/1, wood, double-hung sash windows with storm windows. The house features foundation windows on the north and south elevations. There is a gable-roofed dormer on the façade that features a paired, 1/1, wood, double-hung sash window, and exposed, wood rafters under the eaves. The roof is side gable clad in asphalt shingles. The house features an interior, parged brick chimney on the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3713 Newport Avenue**
PROPERTY NAME: House, 3713 Newport Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1922
DHR NUMBER (S): 122-5087-1622
DESCRIPTION (S):
This is a two-story house designed in the Craftsman style and constructed in 1922. It incorporates a brick foundation and a wood frame structural system clad in wood shingles. The east façade features a one-story, one-bay porch with an asphalt-shingled, hipped roof and battered, wood piers resting on brick pedestals. The primary entrance is centrally located and is comprised of a single-leaf door. There is a one-story porch with an asphalt-shingled, deck-on-hip-roof with exposed wood rafters under the eaves; wood shingled piers that form round arch openings; and a wood-shingled balustrade. The house features 1/1, wood, double-hung sash windows with storm windows. The second story features 4/4, metal, double-hung sash windows surmounted by fixed, metal, round arch windows. There is a hip-roofed dormer on the façade that features a paired, 1/1, wood, double-hung sash windows and exposed, wood rafters under the eaves. The roof is hipped clad in asphalt shingles with exposed, wood rafters under the wide eaves. The house features an interior, brick chimney on the north elevation. There is a one-story, gable-roofed ell appended to the east elevation. The ell features 6/6, wood, double-hung sash windows.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3714 Newport Avenue**
PROPERTY NAME: House, 3714 Newport Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1623
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Craftsman style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system. The façade is clad in vinyl siding and the north and south elevations are clad in wood shingles. The east façade features a two-story porch incorporated under a shed roof extending from the main roof. The first story porch features a false, asphalt-shingled, hipped roof; square, wood columns; and a plain, wood balustrade. The second story porch has been enclosed in vinyl siding punctuated by 1/1, metal, double-hung sash windows. The primary entrance is comprised of a single-leaf, wood, 3-panel door with a storm surmounted by a transom and flanked by boarded sidelights. The house features 1/1, metal, double-hung sash windows. There is a one-story, projecting, canted bay on the south end of

the first story façade. There is a two-story, projecting, canted bay on the south elevation that is surmounted by a closed gable. There is a gable-roofed dormer on the façade that is clad in wood shingles and features a paired, 1/1, metal, double-hung sash windows and cornice returns. There is an intersecting gable on the north elevation. The roof is hipped-side-gable clad in asphalt shingles. The house features an interior, parged brick chimney on the south elevation.

- This is a one-story garage designed in the Modern Movement style and constructed circa 1990. It incorporates a wood frame structural system clad in vinyl siding. The garage features a roll-up, metal, paneled door with four lights. The roof is gable clad in asphalt shingles.

CONTRIBUTING (1 - building)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3716 Newport Avenue**
PROPERTY NAME: House, 3716 Newport Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1916
DHR NUMBER (S): 122-5087-1624
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1916. It incorporates a brick foundation and a wood frame structural system. The first story is clad in vinyl siding and the second story is clad in Bricktex siding. The north end of the north façade features a one-story, three-bay porch with an asphalt-shingled, shed roof and plain, wood posts and balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a round arch-shaped light and a storm door surmounted by a 5-light transom and flanked by sidelights with wood panels. The house features 1/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank some of the first story windows. The house also features some Queen Anne, wood, double-hung sash windows with storm windows on the first story. There is a two-story, projecting, canted bay on the south end of the façade that is surmounted by a closed gable. The closed gable is clad in fishscale-cut, wood shingles and features paired, 2/2, wood, double-hung sash windows with storm windows. There is a two-story, projecting, canted bay on the north elevation that is surmounted by a closed gable. The closed gable is clad in fishscale-cut, wood shingles and features a 2/2, wood, double-hung sash window with a storm window. The roof is hipped clad in asphalt shingles. The house features an interior, brick chimney with a corbelled cap on the south elevation. There is a two-story, hip-roofed ell appended to the south end of the east elevation. The ell is clad in plywood and features a 16-light, fixed, metal window. There is also a one-story, shed-roofed ell appended to the east end of the south elevation. This ell is clad in vinyl siding and plywood. It features a single-leaf, wood door with multiple lights and a storm door; and a plate glass and metal, sliding door.
CONTRIBUTING (1 - building)

Omohundro Avenue

PROPERTY ADDRESS: **2301 Omohundro Avenue**
PROPERTY NAME: Old Dominion Peanut Corporation
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-0130 122-0915
DESCRIPTION (S):
This is a two-story manufacturing facility designed in the Late 19th and Early 20th Century American Movement style and constructed in 1910. It incorporates a brick foundation and a brick structural system. The south façade features a double-leaf, metal door. The building features 1/1, metal, double-hung sash windows with rowlock brick sills and jack arch, header course brick lintels. Metal bars have been applied over the second story windows on the west elevation. The first story windows have been filled. There is an air conditioning unit appended to the east elevation. There is a raised brick stringcourse between the first and second stories. The roof is a low-raking gable with a stepped parapet. The roof features exposed, wood rafters under the eaves on the west elevation. The stepped parapet features a corbelled cornice and is coped in metal.

- This is a one-story manufacturing facility designed in the Late 19th and Early 20th Century American Movement style and constructed circa 1930. It incorporates a brick foundation and a brick structural system. The south façade features a single-leaf door surmounted by a metal, louvered vent. The roof is flat with a parapet coped in a rowlock brick course.
- This is a one-story warehouse designed in the Modern Movement style and constructed circa 1950. It incorporates a concrete slab foundation and a concrete block structural system. The north façade features a sliding, metal garage door; and metal, louvered vents. There is an exterior, metal vent appended to the north façade. The roof is flat with a parapet coped in metal.
- This is a one-story warehouse designed in the Modern Movement style and constructed circa 1960. This building has taller roofline than its adjacent warehouse. It incorporates a concrete slab foundation and a metal frame structural system clad in corrugated metal. The north façade features a metal, roll-up door; and a single-leaf, metal door. The roof is flat and clad in corrugated metal.

CONTRIBUTING (3 - buildings)
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2600 Omohundro Avenue**
PROPERTY NAME: Apartment Building, 2600 Omohundro Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1972
DHR NUMBER (S): 122-5087-1625
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed 1972. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in brick veneer. The west façade features two entrances comprised of single-leaf, metal doors with three lights surmounted by asphalt-shingled, pent-roofed overhangs. The south entrance features a storm door. The entrances are accessed by brick stairs with wrought iron balustrades. The building features metal, sliding

windows with rowlock brick sills. The roof is side gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2601 Omohundro Avenue**
PROPERTY NAME: Duplex, 2601 Omohundro Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1991
DHR NUMBER (S): 122-5087-1626
DESCRIPTION (S):
This is a one-story duplex designed in the Modern Movement style and constructed in 1991. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The east façade features two centrally located entrances that are comprised of single-leaf, metal, paneled doors with storm doors. The entrances are accessed by wood stairs with a wood balustrade. The building features 6/6, metal, double-hung sash windows. Air conditioning units punctuate the façade. The roof is side-gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2609 Omohundro Avenue**
PROPERTY NAME: House, 2609 Omohundro Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 2003
DHR NUMBER (S): 122-5087-1627
DESCRIPTION (S):
This is a two-story house designed in the Modern Movement style and constructed 2003. It is designed to resemble a Colonial Revival-style house. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in vinyl siding. The east façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; wood, turned posts; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door. The house features individual and paired, 6/6 and 4/4, metal, double-hung sash windows. There is a one-story, projecting, canted bay on the south end of the first story façade. There is a one-story, projecting, squared bay on the north end of the second story façade. The squared bay is surmounted by a gable roof with cornice returns. The roof is gable clad in asphalt shingles with cornice returns.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **2911 Omohundro Avenue**
PROPERTY NAME: Apartment Building, 2911 Omohundro Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1953
DHR NUMBER (S): 122-5087-1631
DESCRIPTION (S):

This is a one-story apartment building designed in the Modern Movement style and constructed 1953. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in brick veneer. The east façade features a one-story, projecting, squared bay on the south end. The east façade features two entrances comprised of single-leaf, metal, paneled doors with storm doors. The building features paired, 2/2, wood, double-hung sash windows with storm windows and rowlock brick sills. There is a 4-part, 1/1, wood, double-hung sash window on the east façade. The north elevation features three entrances. The east entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light and a storm door. The two west entrances are comprised of single-leaf, wood, paneled doors with light and storm doors. The roof is flat clad in asphalt shingles with wide eaves. The building features a central, interior, brick chimney.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3100 Omohundro Avenue**
PROPERTY NAME: Duplex, 3100 Omohundro Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1990
DHR NUMBER (S): 122-5087-1633
DESCRIPTION (S):
This is a two-story duplex building designed in the Modern Movement style and constructed 1990. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in brick veneer. The west façade features a centrally located recessed entry vestibule with two entrances surmounted by an asphalt-shingled, pent roof. The entrances are comprised of single-leaf, metal, 8-panel doors. The building features 1/1, metal, double-hung sash windows with rowlock brick sills. There are two, fixed, metal, octagonal windows on the second story façade. There are two story, projecting, squared bays flanking the vestibule on the façade. Intersecting gables surmount the projecting bays. The north and south elevations feature one-story, one-bay porches with asphalt-shingled, gable roofs; wood, turned posts; and wood balustrades. The porches are accessed by plate glass and metal, sliding doors. The roof is catslide clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3111 Omohundro Avenue**
PROPERTY NAME: Duplex, 3111 Omohundro Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1951
DHR NUMBER (S): 122-5087-1634
DESCRIPTION (S):
This is a one-story duplex designed in the Modern Movement style and constructed 1951. It incorporates a concrete slab foundation and a parged concrete block structural system. The east façade features two entrances comprised of single-leaf, wood, paneled doors with four lights and storm doors. The building features individual and paired, 1/1, metal, double-hung sash windows. The roof is hipped clad in asphalt shingles with a boxed cornice and wide eaves.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3223 Omohundro Avenue**
PROPERTY NAME: House, 3223 Omohundro Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1636
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The east façade features a one-story, one-bay porch with an asphalt-shingled, hipped roof; a boxed cornice; paired, wood, Tuscan columns resting on wood paneled pedestals; and turned balusters. The porch roof is surmounted by a plain, wood balustrade that forms a second story balcony. A metal awning shelters the second story balcony. The second story balcony is accessed by single-leaf, wood, door with a light and a storm door. The primary entrance is comprised of a double-leaf, wood door surmounted by a transom. The house features 1/1, metal, double-hung sash windows. Metal awnings surmount the second story façade windows. The south end of the east façade features a two-story, projecting, canted bay. There are gable-roofed dormers on the façade and the west elevation that feature 1/1, metal, double-hung sash windows. There are intersecting, closed gables on the north and south elevations. The roof is hipped-cross-gable clad in asphalt shingles with wide eaves. There is a two-story, hip-roofed ell appended to the south end of the west elevation. The ell features an interior, parged, brick chimney with a corbelled cap. The north end of the west elevation features a two-story, one-bay porch with an asphalt shingled, hipped roof; plain, wood post and a balustrade. There are two, single-leaf entrances on the north elevation of the ell. The second story entrance is accessed by wood stairs appended to the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3230 Omohundro Avenue**
PROPERTY NAME: House, 3230 Omohundro Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1917
DHR NUMBER (S): 122-5087-1635
DESCRIPTION (S):
This is a two-and-one-half-story house designed in the Queen Anne style and constructed in 1917. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The west façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; fluted, wood, Tuscan columns; and turned balusters. The primary entrance is comprised of a single-leaf door with a wrought iron storm door. The house features 6/6, metal, double-hung sash windows. The south end of the west façade features a two-story, projecting, canted bay surmounted by a closed gable. The closed gable features a 1/1, metal, double-hung sash window. There are gable-roofed dormers on the north and south elevation that are surmounted by closed gables. The roof is hipped clad in asphalt shingles with wide eaves. The house features an interior, brick chimney with a corbelled cap on the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3306 Omohundro Avenue**
PROPERTY NAME: House, 3306 Omohundro Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1914
DHR NUMBER (S): 122-5087-1637
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1914. It incorporates a brick foundation and a wood frame structural system. The façade is clad in vinyl siding and the side elevations are clad in asbestos siding. The west façade features a two-story, two-bay porch with an asphalt-shingled, hipped roof and wood, Tuscan columns. The first story porch features a plain, wood balustrade and the second story porch features a vinyl-clad balustrade. The second story porch is accessed by a single-leaf door has been boarded. The primary entrance is comprised of a single-leaf door with a storm door surmounted by a boarded transom. The house features 1/1, wood, double-hung sash windows with storm windows. Non-functional shutters flank the façade windows. The first story windows have been boarded. The north end of the west façade features a one-story, projecting, squared bay. There is a two-story, projecting, squared bay on the north elevation that is surmounted by a closed gable. There is a gable-roofed dormer on the south elevation. The dormer is clad in fishscale-cut, wood shingles and is surmounted by a closed gable. There is an intersecting gable on the facade that is clad in fishscale-cut wood shingles and features vergeboards. The roof is hipped-cross-gable clad in slate shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3308 Omohundro Avenue**
PROPERTY NAME: Apartment Building, 3308 Omohundro Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1933
DHR NUMBER (S): 122-5087-1638
DESCRIPTION (S):
This is a two-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1933. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The north end of the west façade features a two-story porch incorporated under the main roof. The first story porch is three bay and the second story porch is two bay. The porches feature a two-story, brick pier and plain, wood posts and balustrades. There are two entrances on the west façade that are comprised of single-leaf, metal, paneled doors. The second story porch is accessed by a single-leaf, wood door with six lights and a storm door. The building features individual and paired, 1/1, metal, double-hung sash windows. There is a two-story porch on the north elevation that features an asphalt-shingled shed roof and plain wood posts and balustrades. The roof is hipped clad in asphalt shingles.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3508 Omohundro Avenue**

PROPERTY NAME: House, 3508 Omohundro Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1910
DHR NUMBER (S): 122-5087-1639
DESCRIPTION (S):
This is a two-story house designed in the Queen Anne style and constructed in 1910. It incorporates a brick foundation and a wood frame structural system clad in vinyl siding. The west façade features a one-story, two-bay porch with an asphalt-shingled, hipped roof; square, wood columns; and a plain, wood balustrade. The primary entrance is comprised of a single-leaf, metal, paneled door with a fan-shaped light. The house features 1/1, metal, double-hung sash windows. The second story facade façade features a one-story, projecting, canted bay surmounted by a closed gable. The closed gable features a 1/1, metal, double-hung sash window. There are intersecting, closed gables on the north and south elevations. The roof is hipped clad in asphalt shingles with a wide frieze. The house features an interior, brick chimney with a corbelled cap on the north elevation. There is a one-story porch appended to the east elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3511 Omohundro Avenue**
PROPERTY NAME: Apartment Building, 3511 Omohundro Avenue
OTHER NAME (S): Westmount Apartments
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1640
DESCRIPTION (S):
This is a four-story apartment building designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a brick foundation and a brick structural system. The primary entrance is centrally located on the east façade. It is comprised of a single-leaf, wood, paneled door and a Classical door surround that features limestone pilasters, frieze, and cornice. The building features individual and paired, 1/1, metal, double-hung sash windows with rowlock brick sills. There are two, four-story, projecting, squared bays on the north and south ends of the façade. The roof is flat with a parapet coped in metal. The building features a corbelled cornice at the roofline.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3601 Omohundro Avenue**
PROPERTY NAME: Apartment Building, 3601 Omohundro Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1955
DHR NUMBER (S): 122-5087-1641
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1955. It incorporates a brick foundation and a wood frame structural system clad in brick veneer. The primary entrance is centrally located on the east façade and is comprised of a single-leaf, metal, paneled door flanked by 5-light

sidelights and surmounted by an asphalt-shingled, gable roof supported by brackets. The entrance is accessed by brick stairs with a wrought iron balustrade. The building features 2/2, metal, double-hung sash windows with rowlock brick sills. The building also features fixed, metal windows flanked by 2/2, metal, double-hung sash windows with rowlock brick sills. Non-functional shutters flank the façade windows. The roof is side gable clad in asphalt shingles. There is a one-story, shed-roofed ell appended to the north end of the west elevation. The west elevation features four, single-leaf, metal, doors. The second story entrances are accessed by metal stair appended to the west elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3606 Omohundro Avenue**
PROPERTY NAME: Apartment Building, 3606 Omohundro Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1969
DHR NUMBER (S): 122-5087-1642
DESCRIPTION (S):
This is a two-story apartment building designed in the Modern Movement style and constructed in 1969. It incorporates a concrete block foundation clad in brick veneer and a wood frame structural system clad in brick veneer. The primary entrance is centrally located on the south elevation and is comprised of a single-leaf door. The building features 1/1, metal, double-hung sash windows with rowlock brick sills. Non-functional shutters flank the façade windows. The roof is gable clad in asphalt shingles.
NON-CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3608 Omohundro Avenue**
PROPERTY NAME: Duplex, 3608 Omohundro Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1920
DHR NUMBER (S): 122-5087-1643
DESCRIPTION (S):
This is a two-story duplex designed in the Late 19th and Early 20th Century American Movement style and constructed in 1920. It incorporates a brick foundation and a wood frame structural system clad vinyl siding. The south end of the west façade features a two-story, one-bay porch with an asphalt-shingle, hipped roof. The first story porch features plain, wood posts resting on brick pedestals and a plain, wood balustrade. The second story porch features plain, wood posts and balustrade. The second story porch is accessed by a single-leaf, wood door with nine lights and a storm door. The primary entrance is located on the north end of the facade and is comprised of a single-leaf, wood, paneled door with eight lights and a storm door. The primary entrance is accessed by brick stairs leading to a stoop that is surmounted by an asphalt-shingled, gable roof supported by wood brackets. The duplex features 1/1, metal, double-hung sash windows. The roof is hipped clad in asphalt shingles. The duplex features an exterior, brick chimney with a corbelled cap on the south elevation.
CONTRIBUTING (1 - building)

PROPERTY ADDRESS: **3715 Omohundro Avenue**
PROPERTY NAME: House, 3715 Omohundro Avenue
OTHER NAME (S):
CONSTRUCTION DATE: 1938
DHR NUMBER (S): 122-5087-1644
DESCRIPTION (S):
This is a one-and-one-half-story house designed in the Colonial Revival style and constructed in 1938. It incorporates a brick foundation and a wood frame structural system clad in asbestos siding. The east façade features a one-story, gable-roofed, projecting, squared block with cornice returns. The block features the primary entrance, which is comprised of a single-leaf, wood door with six lights surmounted by a wood cornice. The house features 1/1, metal, double-hung sash windows. There is an intersecting gable on the north end of the façade. Non-functional shutters flank the façade windows. The roof is side gable clad in asphalt shingles. The house features a central interior, brick chimney. There is a one-story, gable-roofed garage appended to the north elevation. The garage features double-leaf, wood, paneled doors surmounted by a pent roof.
CONTRIBUTING (1 - building)

Summary Statement of Significance:

The Park Place Historic District is a residential and industrial historic district located north of the center of the city of Norfolk, Virginia. It is primarily defined by turn-of-the-20th-century residential buildings and low-scale turn-of-the-20th-century to mid-20th-century industrial buildings. The district comprises four major developments dating to the late 19th century: Kensington, Park Place, Old Dominion Place and Virginia Place. Mostly residential in character, an industrial area is situated at the south and west ends of the district, which was influenced by the Norfolk Southern railroad spur that was built in 1884. Development pressure due to the success of Ghent, Norfolk's first planned suburban development, in 1890 led to the sale of numerous small farmsteads surrounding the downtown area to alleviate the increased housing demand. The initial sale of lands within the Park Place Historic District occurred in 1890 with subsequent land acquisitions and suburban development plans in 1896, 1898, and 1902. The addition of the streetcar line in 1898 and the development of Lafayette Park, Norfolk's first city park, made the Park Place Historic District an attractive and convenient place to reside. The easy access to the downtown and proximity to developing industry along the railroad line enabled the area to develop quickly in the 1910 to 1920 period. Additional buildings were added and improved into the 1950s. The district is comprised of 1532 contributing resources and 333 non-contributing resources, and encompasses approximately 347 acres. The Park Place Historic District is significance under Criteria A and C for its association with Norfolk's suburban development and for its architectural character and integrity from the period 1884 to 1955.

Statement of Significance:

The land on which the Park Place Historic District lies was occupied by small farmsteads of less than fifty acres to approximately 200 acres in Norfolk County, just north of the city of Norfolk. A number of property owners were scattered within the approximate 400-acre area bound presently by 23rd Street to the south, Granby Street and Church Street to the east, 38th Street to the north, and Hampton Boulevard to the north. The lands remained open and privately owned through the 19th century.

Suburbanization

In 1890 Norfolk's first suburban development was planned north of downtown. Named Ghent, the development's success was impetus for land developers to acquire open lands for the creation of suburbs. The streetcar, which operated as early as 1873 as horse-drawn carriages, had been electrified by 1894 and had been extended to the developing outlying suburbs. The growth of the city coupled

with the expansion of the streetcar led to the development of multiple suburbs at the turn of the 20th century.

The streetcar ushered in the second stage of suburbanization of the United States' landscape. Suburbanization at first involved from wealthy Americans who could afford to purchase houses in remote towns that had become popular on the outskirts of larger cities, such as New York and Chicago, and who could afford to commute into the cities. This ideal became the prototype for suburban planning and ideas of model living by the middle classes. With the advent of the electrified streetcar in 1888, the ability for middle-class America to realize the dream of more pastoral settings versus crowded urban areas became a reality.[1] Open land in surrounding areas of densely populated cities became prime breeding grounds for planned suburbs.

The first groups to suburbanize to the newly planned suburbs were the middle and upper-middle classes. The early or first suburbs are defined by larger lots and houses, such as the Ghent neighborhood in Norfolk, which was Norfolk's first planned suburb. This neighborhood contained both waterfront and inland suburban lots of typically one hundred feet square to accommodate large single-family houses. Its success and the need for housing in the city of Norfolk resulted in outlying farmland being used for new suburban development. Shortly after Ghent's formation in 1890, other suburbs were under development following the streetcar lines that radiated from the city center.[2]

The streetcar's advantages to the average commuter were defined by the ease and speed at which the suburbanite could travel into the city to shop, work and commune. The average travel time to the city from the suburbs via streetcar was between 10 to 30 minutes. In addition, streetcars made numerous stops along the route and allowed suburban development to expand along its lines in a rectilinear fashion. The streetcar suburbs were planned with easy access to the streetcar line. The average foot-travel time for individuals to a nearby streetcar line was between 5 and 10 minutes. The early suburbs also continued the grid plan found within cities, which maximized land area usage, and formed a familiar street system for residents.

Another factor in the rise and popularity of the streetcar suburb was the freestanding house. The freestanding single-family house was considered to be the answer to the health problems associated with the densely populated city, and the improvement of life through the improvement in environment. Suburbs became attractive to the working classes that were confined to the less desirable areas of the inner city. The suburban ideal was also marketed to this class through more modest-scale houses and slightly more dense suburban communities. Though these communities were denser than those of the upper to middle classes, they afforded similar benefits even with smaller lots.

An engineering improvement in the construction of houses is also believed to have benefited the rise of the suburbs in the United States. The balloon-frame method of construction invented in the 1830s proved to be a cost-effective means of house construction. The system was based upon a light framing method of using 2-by-4-inch wood studs nailed together, which distributed the weight of the building to the various areas of the frame.[3] In addition, mass-produced building materials had become readily available in the late 19th century. The availability of building materials and the development of easier building methods made house construction much cheaper and is believed to be as important to the development of the suburbs as the streetcar, since it reduced the cost of construction and allowed the average family to afford a free-standing house.[4]

Attraction to the city of Norfolk's outlying areas was also due to increased population pressure and the need for adequate housing for the growing middle class. The middle class was caught between the tenements of the lower classes and the upper class houses situated at the west end of the city along the waterfront. In the densely populated city, the middle-class was primarily relegated to occupying larger rental units within existing buildings. The idea of the single-family, free-standing house exemplified middle class core values and that ideal was circulated in popular literature.[5] The single-family house represented the idea of the Americanization of the growing population and ability to attain wealth through society. In addition, the suburbs fulfilled the American values of the middle-class through its cultural empowerment of home ownership. Though the upper classes could afford retreats further from the city, the suburbs provided a similar ideal outside of the crowded urban areas. More modest in form, the suburbs were in essence the middle-class retreat from the inner cities.[6]

The Railroad

In 1882 the Norfolk and Western Railroad purchased 325 acres of lands along the Elizabeth River at Lamberts Point. Lamberts Point is located west of the Historic District and northwest of the city of Norfolk center. The intention of the purchase along with the purchase of lands for a spur line was to extend the capacity of the shipping of coal. The docks on the Elizabeth River near downtown Norfolk had become inadequate to handle the increased tonnage of coal and coke shipped from the western parts of Virginia. In addition, a coal pier and deep sea terminal in Newport News had opened for the C&O Railway in the years preceding the acquisition of the Lamberts Point property. The C&O terminal in Newport News had put Norfolk and Western at a disadvantage and in an effort to compete Norfolk and Western looked to expand their operations.[7]

In 1884 the spur line was built to the new Lamberts Point docks that were under construction. The spur line extended the existing Norfolk line to the north and then curved westward toward the docks. At this time Pier 1 was under construction at the docks, which was planned to handle 3000 tons of coal per day. Along with the added employment in the area of the Park Place Historic District, the railroad line improved the area's economic viability. The spur allowed for additional or secondary spurs or feeder lines to tie into the main Lamberts Point dock spur from industrial concerns that required the use of the railroad to transport goods. In addition to the main business that required the feeder line, additional businesses could take advantage of the line along its length. This would promote industrial development along the feeder line as well as the main spur.[8]

In the case of the Norfolk and Western spur to the Lamberts Point docks, an additional spur or feeder line was installed near the center of the line leading to the Lamberts Point Knitting Mills located on Colley Avenue and 44th Street. The Mills were constructed in 1895 for the fabrication of cotton goods. Norfolk was a major port for the exporting of domestic goods during the Reconstruction period. Its exports increased annually between the 1860s through the 1920s, among them cotton, which was shipped to Norfolk from the southern states where it was grown. Though Norfolk was exporting raw cotton, there were also businesses within Norfolk where cotton was woven into clothing and cloth. These knitting mills were erected in the late 19th century in Berkley and the near the downtown area. The goods produced by the knitting mills then required transportation from the plant, which warranted the construction of a feeder line to tie into the main railroad system.[9]

After the erection of the feeder line at the west end of the Historic District to the Lamberts Point Knitting Mills, additional manufacturing businesses erected mills and plants along the line to take advantage of the access to the railroad. Barrel manufacturing plants, wood yards, brick plants, and bagging plants began to appear along the main railroad spur and feeder line.[10] The railroad defined its immediate surroundings by providing access to the major railroad mode of transportation in the late 19th and early 20th centuries. In addition to providing industry for the area, the railroad provided employment in the outlying suburban areas surrounding the city. With the development of manufacturing facilities along the railroad lines, a need for a local workforce arose. The workforce for the manufacturing facilities initially had been drawn from the urban core. Housing was needed for the local workforce near the surrounding industrial area and the suburbs that were erected nearby provided needed housing.

Lafayette Park

The 1890s saw the acquisition and development by land and development companies of a number of farms surrounding the Norfolk center. In many cases the streetcar line was planned for these areas, but had not been installed upon their acquisition. In the case of the Park Place Historic District, the streetcar line was installed to Lafayette Park in 1898 connecting the downtown area with the east boundary of the district.[11]

Lafayette Park, originally called City Park, was purchased by the city of Norfolk in 1892. Plans for a park site were under consideration with proposals closer to the downtown area near the Elizabeth River and Hague waterway. The purchase of the lands north of the St. Mary's Cemetery provided for increased traffic to the pastoral lands outside of the city's boundaries in Norfolk County.[12] The park was named "Lafayette Park" in 1899 and in the early 20th century featured a zoological park. The park featured curvilinear pedestrian paths in the shape of an elongated cloverleaf form. Entrances to the park were planned at the southwest and northwest corners. A streetcar waiting station was installed in the late 1890s for visitors.

With the addition of the park to the landscape and the streetcar line located on Granby Street, which featured a turn around through Riverview situated to the park's north, the east end of Park Place Historic District had a direct line to downtown Norfolk. An additional line was added along Debree Avenue, which then turned east onto 35th Street and then north to Killam Avenue. These two lines were the earliest added to the fledgling streetcar system that expanded into the mid-20th century. The streetcar line was replaced with buses in 1948, which followed many of the former streetcar routes and expanded the public transportation system.[13]

Proposed and developed simultaneously, the Park Place Historic District and Lafayette Park fulfilled the combination of suburban ideal and park-like settings that urban residents had sought during the 19th century. The concept of placing parks within urban settings fulfilled the suburban ideas of development of the detached single-family dwelling, larger lots, and more pastoral settings that were advocated and sought after by the middle class. New York City's Central Park was an outgrowth of the park idea within an urban setting and the basis for park planning in cities across the United States during the last half of the 19th century.[14]

Aside from the development of parks for cities, parks were integral to the suburban plan. While the ideal and fashionable plans of the late 19th century were based in pastoral settings and curvilinear street plans, Park Place retained the traditional grid pattern. Lafayette Park adjacent to the neighborhood was designed with curvilinear walks maximizing the natural setting of the landforms. In response to the formation of the park, the developments closest to Lafayette Park, Kensington and Park Place, do

not feature parks within their bounds. This is also evident in the plan for Virginia Place. Old Dominion Place incorporated two parks within its plan, Hubbard Park and Munson Park, based upon the public square within urban areas found in 17th and 18th century American planning.

Park Place Historic District Developments

The Park Place Historic District is comprised of four major suburban developments: Kensington, Old Dominion Place, Park Place and Virginia Place. Kensington is situated in the northwest quadrant of the Historic District, Old Dominion Place is situated in the southwest quadrant of the Historic District, Park Place is situated in the southeast quadrant of the Historic District, and Virginia Place is situated in the northeast quadrant of the Historic District. The quadrants are divided to the north and south by Lamberts Point Road and east and west by the block between Colonial and Debree Avenues. The area comprising the Park Place Historic District is occupied primarily by these four major developments. Some land areas along the fringes of the Historic District are portions of other land developments that primarily occupy areas outside the Historic District, but whose boundaries extend into the present Park Place Historic District boundaries.

The developments employ a grid plan, which was the most popular and economical plan in suburban development. It allowed the development company to attain more buildable lots and a higher profit. The grid plan is found within the city of Norfolk extending from the downtown area north and eastward into the suburban areas. Though Norfolk is bound on the west and south by waterways and numerous waterways permeate it, the earliest developments reflect the traditional use of a grid plan. The plan was popular into the early 20th century and used in some development plans into the mid-20th century. Since the Park Place Historic District was bound by other development plans, it continued the existing grid plan established to the west, east and south.

Each of these developments followed the success of Ghent, the first planned suburb of Norfolk located north of the downtown area. Development pressure on the lands surrounding the city escalated in the 1890s and 1900s. The area within the Park Place Historic District was sold as early as 1890 for development.

The area to become Old Dominion Place was sold in 1890 to the Central Land Company who laid out a plan for its development.[15] The lands were purchased from two owners, William Slaughter and George Pollard.[16] The Central Land sold the 107-acre parcel in 1899 to the Old Dominion Land Company, which named the development Old Dominion Place.[17]

The Old Dominion Land Company was a subsidiary of the Virginia Realty and Investment Company based in Norfolk and Portsmouth. It owned a number of other subsidiaries in Portsmouth, Norfolk and Norfolk County. Its president, the Honorable Harry Lee Maynard, was a Portsmouth native and was active in governmental affairs. He was elected to the Virginia House of Delegates in 1890, the Virginia State Senate in 1894 (for which he served two terms) and to Congress in 1900.[18]

The next development to be formally planned was Park Place. Planned in 1896, Park Place was part of the Theodore Ramsey tract that comprised 171 acres south of Lamberts Point Road.[19] In 1899 additional land holdings were acquired northwest of the Park Place development and two corporations were formed headed by Ebenezer Black. The additional lands were named Kensington and developed similarly to the Old Dominion Place and Park Place plans. Ebenezer Black was an immigrant from Scotland who initially was a baker in Norfolk. He entered the real estate business in 1897 and by 1902 organized the Trade and Trucker's Bank and operated two real estate development companies.[20]

Virginia Place occupies the northeast quadrant of the Historic District and followed the grid pattern established by the adjacent developments. This development was a subsidiary of the Atlantic Building Company. Building on this development commenced after 1900 with predominantly residential building types.

The developments' names most likely celebrate Virginia's heritage and the orientation of the developments to Norfolk's first planned City Park. Virginia Place and Old Dominion Place were most likely named to honor Virginia, though Old Dominion Place also honored the name of its parent company, Old Dominion Realty. Park Place and Kensington were most likely named to mark their location near Lafayette Park. Park Place, which only partially abuts the park, identified its location. Kensington is more of a reference to the fashionable Victorian neighborhood of Kensington in London, England, and Kensington Gardens, which was a large park within London and the setting for Kensington Palace, home of England's royal family.

Initial development within the Park Place Historic District was primarily residential. Once the lots had been laid out, sale commenced immediately. By 1900, eight properties had been constructed in Old Dominion Place and thirty-seven had been constructed in Park Place. Kensington and Virginia Place were platted, yet still vacant.

Residing within the Park Place Historic District in the early 20th century was a number of builders who are credited with the erection of buildings within the district. One of the most notable was William W. Marshall and Company, which constructed twenty-five buildings within the Park Place Historic

District area between 1902 and 1907.[21] Marshall was the secretary of the Security Loan and Trust Company and also provided building services. In addition, he resided at 33rd Street near Omohundro Avenue, as did other contractors, such as Edward L. Myers.[22] According to the remaining building permits from the period 1902-1907, Myers erected seventeen buildings within the Historic District boundaries and also resided within the Historic District at 29th and Granby Streets.[23] Other contractors who provided building services within Norfolk also resided within the Park Place Historic District boundaries including, Elias A. Goehring (29th Street and Colonial Avenue)[24], and John H. Pierce (29th and Granby Street).[25] There houses are no longer standing.

In many cases the building permits reveal that houses were constructed for individual clients, but in some cases buildings were erected by speculators who then sold the house while it was under construction or after completion. William W. Marshall applied for a number of building permits during the 1902 to 1907 period to erect houses and lists himself as the client. Myers and Goehring also are found applying to erect buildings for themselves. In addition, building corporations, such as Jamestown Realty Company, also had houses erected within the Historic District. In some cases, apartments were erected by builders for clients that included themselves.

Architectural Characteristics

The architectural styles used in the construction of buildings within the Park Place Historic District reflect the vernacular styles popularized at the turn of the 20th century into the mid-20th century. Most commonly seen are residential buildings designed in the Craftsman, Bungalow, Colonial Revival, and Queen Anne styles. By the post-World War II period, the Ranch-style house was the most common form constructed within the district along with the modest one-story form with Colonial Revival details popularized during the World War II housing boom. Within these overall general forms, there are some unique styles used, such as the Shingle style. Among the industrial buildings, most have simple rectangular box forms with little decoration, but some feature Art Deco and Art Moderne styles.

The buildings within the district exemplify the American styles which were being developed in the late 19th and early 20th centuries. The Colonial Revival style was an attempt to honor American history by emulating the styles popularized during the United States' settlement. The 1876 centennial of the independence of the United States made the Colonial style popular among architects as an effort to pay homage to the nation's heritage. The mid-19th century was defined by European sources, such as ornate Gothic Revival and Victorian styles. The more simplified Colonial styles and American sources were re-examined and employed to reflect America's heritage. Termed Colonial Revival, the style is symmetrical and uses many classical sources such as rounded-arch windows, hipped roofs, cornices, and columns.[26]

This style prevailed primarily from 1910 to 1929 and featured various interpretations of Colonial sources, such as the Dutch Colonial Revival style.[27]

The Queen Anne style also commonly seen in the Historic District is based in English Victorian architecture. Its irregular form breaks the symmetry found in Colonial Revival architecture. Adapted more widely in the 1880s and 1890s, the Queen Anne style uses varying rooflines, dormers, brick and shingle patterning, and highly ornate cornices and porches. The style was commonly seen among houses for the middle to upper classes, but vernacular forms using scaled-back size and articulation were used within more modest middle-class houses. The flexibility of the style reflected the fashionable image that could be portrayed through the architectural style and reflected the individuality of those who had houses designed in it.[28] A similar style, the Shingle style, was also employed for building, though much more infrequently. The Shingle style, popularized in the late 19th century by such noted architects as H. H. Richardson and the firm of McKim, Mead and White, was an adaptation of the Queen Anne. It employs heavier proportions, steeper and irregular rooflines, and the use of wood shingles.[29]

The Bungalow and Craftsman styles gained popularity in the post-World War I period. Though introduced in the late 19th century, their simplicity was not duly embraced as a common form until the 1920s. The two major forms are the one-story Bungalow and the two-story Craftsman foursquare plan. Using simplified open plans and minimal detail, the styles were mostly constructed within the Historic District during the 1920s. The vernacular styles seen within the Historic District are common among planned communities within Norfolk during this period. These forms were much more practicable and easier to erect within a short time.[30]

Within the Park Place Historic District, the Colonial Revival, Queen Anne, Craftsman and Bungalow styles represent sixty percent of the building styles employed. As the period between 1900 and 1930 reflected the most construction, the styles that were most popular and employed most often are found the most frequently. The range of architectural styles reflected the varying taste of Americans to architectural design. The common thread among a majority of the housing styles found is that they are particularly American and reflect the independence of American thought and taste[31]

In the post-1940 period, architectural style changed dramatically from the pre-World War II architectural styles that relied upon European sources with building articulation and decoration. In the post-World War II period, domestic architecture shifted away from the highly ornate styles in favor of styles that were more simplified. Partially due to the need for housing and the popularity of the Colonial Revival style, single family houses took on simpler forms with minimal articulation. Though grounded in the Colonial Revival style, they were more commonly one to one-and-one-half stories in the period after World War II. The last

half of the 20th century is defined by an adaptation of the Colonial Revival style. This is found mainly among the modest Colonial Revival houses with little or no articulation and most of one to one-and-one-half-stories, such as those with a Cape Cod form, and Ranch-style houses. These styles are much more simplified and typical of building forms during the mid-20th century.[32]

The industrial areas of the Historic District were developed primarily due to the Norfolk and Western railroad line that led to the Lamberts Points Docks. Spurs were added to the line along 23rd Street to the warehouses sited on 23rd and 24th Streets. An additional railroad spur was installed in 1895 leading to the Lamberts Point Knitting Mills, located north of the Historic District. The spur was oriented north-south near Hampton Boulevard and connected with the Norfolk & Western line west of Hampton Boulevard. The spur provided the ability of industry to ship its goods via rail. Parallel to Hampton Boulevard, it precipitated the development of the west end of the Historic District as primarily industrial. Hampton Boulevard was not extended in its current form until the 1910s with the addition of suburban development to the south and north known as West Ghent and Lamberts Point, respectively.[33]

The industrial building forms are generally rectangular, though the styles vary. The buildings constructed from 1900 through the 1920s are simpler with articulation at the building edges exemplified by brickwork. These buildings employ large window openings to allow light and ventilation. Most feature traditional forms and elements common to building construction during this period. Those industrial buildings constructed between the 1930s and 1940s reflect the Art Deco and Moderne styles popularized primarily for commercial architecture. The forms are adapted for industrial buildings and in both building types, commercial and industrial, are relegated to the façade and entrance articulation. This is found in pavilioned entrances, rounded corners, narrow windows openings, streamlined canopies, and streamlined details. The 1950s through the modern period reflect simpler building construction where adornment is not used at the roofline, or on the doors and windows.

Norfolk's Growth

In 1902 the city of Norfolk annexed the area to its immediate north in Norfolk County including the suburban developments of Colonial Place (north of Park Place), Riverview (northeast of Park Place) and Lafayette Park. This annexation was the first in the 20th century, but the third after its incorporation in 1845. Known as the Park Place Annexation, it encompassed 5.64 square miles (3610 acres). It became the 7th Ward of the city.[34]

While the addition of the lands increased the population of the city of Norfolk, the most dramatic change seen in the development of the city of Norfolk was the addition of the Norfolk Naval Station. The Naval Station developed from the abandoned site of the Jamestown Exposition, which was held in 1907. In 1905 development of the Jamestown Exposition was underway to celebrate the tercentennial of the landing at Jamestown. A site was chosen north of Norfolk, Virginia in Norfolk County at the south boundary of Hampton Roads, which is located at the confluence of the James, York, and Elizabeth Rivers and the Chesapeake Bay. The proximity of the site to the Jamestown settlement, the location of the first landing at the mouth of the Chesapeake Bay, Williamsburg, Newport News, and Norfolk, and its waterfront location made it an optimal location for the pending celebration.

Work began to construct exhibition halls on the site and a trolley line that facilitated travel for visitors between the newly constructed hotels in downtown Norfolk and the Jamestown Exposition. Besides large-scale exhibition halls and walkways along the waterfront, there were a series of houses constructed to represent the states of the original thirteen colonies. Each house was designed according to a style associated with their role in the founding of the United States.

The Navy participated in the exposition with a display of the navy ships in the Hampton Roads harbor. The deep port facilitated the anchoring of large ships, such as large battleships. The "Great White" fleet remained in the port after the exposition closed in the fall of 1907.[35]

The Exposition was not considered a great success for Norfolk and was preceded by much more successful expositions, such as the 1876 exposition held in Philadelphia and the 1893 exposition held in Chicago. Following the close of the exposition, the buildings and houses lay vacant as beacons overlooking the entrance to the largest natural port in the United States. The buildings began to decay and development of the site was precluded by lack of interest and the inability to market the site.[36]

The attraction of the site to the Navy was due to a number of attributes, including the deep-water port, proximity to other naval facilities, such as the Norfolk Naval Shipyard, and its availability. The Navy purchased the site in 1917 and began a process of acclimating the existing Jamestown Exposition building and other smaller buildings on site to accommodate their program.[37] The Jamestown Exposition State Houses and exposition halls were retained for use as residential space and administrative space for the new base.

A large-scale construction project began to increase the land area and construct piers along the west side of the site. This would provide the Navy an additional 319 acres to construct storehouses, ship supply buildings, and training facilities for the Navy. Development of the base occurred over the next 23 years.[38]

In addition to developing the facility, construction caused Norfolk's population to increase dramatically. In 1917 the population had increased to 130,000 from 67,000 in 1910. The workforce to construct the numerous buildings on the site of the new station was civilian and jobs were plentiful in Norfolk. The facility grew through the early 20th century, which included the addition of a small air station in 1940, which was located on the east side of the facility. Additional land was acquired to the east and small creeks were filled to accommodate additional barracks, quarters, and runways to support the squadrons stationed at the air station.

Though Park Place had been mostly developed by the 1940s, World War II changed the mostly single-family-dwelling community to multiple-family which would have a long lasting and devastating effect on the neighborhood's stability in the last half of the 20th century. The development of the Norfolk Naval Base and expansion of the Naval Air Station during World War II brought additional troops and their families to Norfolk. In addition to supporting the war effort, a massive civilian workforce was enlisted to work on the military facilities.[39] The population of the Norfolk, Portsmouth and Princess Anne County (now Virginia Beach) had increased 23 percent between 1940 and 1941. While the Navy erected housing developments in Norfolk, including Ben Moreell and Oakdale Farms, for military families, there was still a major housing shortage. During the war period the number of housing units had only increased by ten percent. Additional housing projects were underway during this period, but many people opened their houses for tenants or subdivided buildings for multiple-family use.[40]

Post World War II Decline

The deterioration of the neighborhood has been attributed to the displacement of low-income and minority families from the densely populated area east of the downtown area during the 1950s. While this is a contributor to the decline of the neighborhood, the ground work for its decline was laid during World War II. Lack of available housing in Norfolk caused many property owners to subdivide their houses to accommodate multiple tenants. Premium rents could be charged since housing was scarce and the workforce needed at the military facilities was so large. In addition, new housing developments were planned in the post-World War II period north and east of the downtown area and the late 19th and 20th century suburbs. Numerous families relocated to the new outlying suburbs which could be accessed by the automobile, which had become a staple in the American household.

Thus began the abandonment of the now perceived densely populated late 19th and early 20th century suburbs. The propaganda of the prosperity of the post-World War II period was promulgated in publications and through the passing of the G.I. Bill of Rights. The G.I. Bill of Rights was an effort to

allow soldiers returning from World War II the ability to afford a new house as a reward for service to the United States. This ideal is furthered by corporations that were creating new markets in the post World War II period. Many companies that provided war machines during World War II provided appliances and other domestic products during the post-World War II period.[41] The new suburbs provided modern amenities, such as air-conditioning that was unavailable in the early 20th century houses. The desire for modern amenities found in popular literature and the accessibility of home ownership were also responsible for the relocation of residents from their turn of the 20th century neighborhoods.

Another impact to changes in the Park Place Historic District was the desire by the Norfolk city government to clear the slums adjacent to the downtown core of Norfolk. The Norfolk Housing Authority had been created in 1940 to clear slums, but with the onset of World War II, funding was diverted to the construction of defense housing. In 1946 after World War II, the Norfolk Housing Authority was renamed the Norfolk Redevelopment and Housing Authority (NRHA) and resumed the initial mission of the Norfolk Housing Authority.[42] Its first major project for slum clearance was known as "Project Number One". The intention of this project was to clear forty-seven blocks of what the City considered to be a slum and called for the erection of over three thousand public housing units. In 1951, the city of Norfolk began the demolition of numerous buildings causing the relocation of many of its largely African-American and lower income citizens.[43] To handle the interim displacement, two thousand families were relocated to housing previously erected in areas farther east of the downtown area.[44] Those families not relocated sought housing outside of available public housing. It was expected that new housing codes enacted after the World War II housing dilemma would protect the early 20th century suburban areas of Norfolk.[45]

In 1956 with the success of Project Number One, another project was planned, which would have more repercussions to the Park Place Historic District. Project II proposed to clear 135 acres and was ten times larger than Project Number One. The project displaced twenty thousand people, but in this case there was no proposed housing for the displaced to reside temporarily while the new projects were underway.[46] This put additional pressure on the early 20th century suburbs that surrounded the city within a five-mile radius. Many houses had been subdivided during the World War II period and could accommodate the influx of African-Americans who resided in the acreage cleared during Project II.[47] In addition, zoning laws were not in effect at this period and subdivision of housing continued to accommodate more residents.

In the initial Conservation Plan developed by NRHA in 1973 the Park Place Historic District is described as having deteriorated significantly during the period between 1950 and 1970. The physical

problems described in the report include broken curbs, broken sidewalks, streets without paving and an aging housing stock. In addition, the report lists the increased population of low income and large families as an impetus for further deterioration due to decreased maintenance.[48] This is a direct result of the subdivision of houses in World War II and the influx of low-income residents to the Historic District. In addition, buildings were allowed to deteriorate by property owners who collected the rental income with providing maintenance to the perceived aging buildings.

With the changes within Park Place and the development of newer suburbs in outlying areas of Norfolk County and an expanded city of Norfolk, many residents of Park Place opted to relocate to newly developed neighborhoods versus remaining among their changing community. Known more commonly as "white flight," Park Place's racial mix had shifted dramatically between 1950 and 1970. During the 1960s the neighborhood was noted as changing its racial distribution as well as its residential type from owner-occupied to rental property. By 1970, the overall character of the Park Place Historic District had changed from predominantly white to African-American.[49]

The impact of the changes to the Historic District character during this period extended beyond residences to business and religious centers. Members of church congregations retained their churches within the Historic District, while the congregation relocated outside of the community. Their ability to travel via automobile to church enabled them to maintain their link to the religious building. In most cases, though, the original congregation abandoned their church within the Historic District to erect a new church in the newer suburbs developed in the mid-20th century. In addition, commercial centers found increasing vacancies among the smaller commercial concerns within the community. The addition of larger stores in shopping centers erected near the mid-20th century suburbs and the accessibility of these centers by the automobile led to the demise of the areas of smaller commerce within the early 20th century suburban commercial cores.

Redevelopment Efforts

In 1973, the Norfolk Redevelopment and Housing Authority named the Park Place neighborhood as a Conservation District. In its Conservation Plan, NRHA described the area as "very high in prevalence of substandard physical and social problems."[50] NRHA's solutions included the acquisition of property for rehabilitation, acquisition and removal of substandard buildings, and the erection of new buildings and public facilities.[51]

By the 1985 Amendment to the initial Conservation Plan, NRHA had listed the rehabilitation of 212 buildings through rehabilitation loans, the removal of forty-two buildings, the erection of thirteen

multiple family units, and the installation of new curbs, gutters and street light fixtures.[52] It appears from the report that substantial improvements had been made in the first decade after the implementation of the initial conservation plan. Within this period Park Place's first apartment building turned into condominiums ushering alternative types of property ownership.[53]

Additional changes were planned to the area including the clearance of numerous blocks of housing for the widening of Church Street, located at the east end of the Historic District. The east boundary of the Historic District was greatly affected by the widening of Church Street and Granby Street through the Huntersville neighborhood to Broadway Street in the Historic District. The widening of the roadway entailed removing existing curbing on the west boundary of the roadway and installing a median. Acquisition of lands and the demolition of the properties in this corridor continued from the 1980 through the 1990s to accommodate the wider road. The southeast end of the Historic District was affected greatly by the removal of numerous properties, and has either remained vacant land or has been redeveloped with turn-of-the-21st-century buildings.

In 1994, the fourth amendment to the Conservation Plan was published and provided a much bleaker view of the changes within the Park Place neighborhood. According to the report the stability of the conservation area had declined from 1970 due to the decrease in population and decrease in median family income. In addition, over seventy percent of the area's housing was rental. A more aggressive plan was proposed, which entailed focusing on the eastern end of the neighborhood. The plan provided for the removal of nearly half of the buildings within the area and the erection of new housing of similar character.[54]

In the late 1990s, contracts were let for the erection of single family housing on acquired lots on 34th and 35th Streets. In addition, numerous properties were acquired on West 32nd and West 33rd Streets at Omohundro and Llewelyn Avenues for demolition. In 2004, NRHA solicited proposals for the erection of houses within this area. Known as "Park Place East at Broadway" and located outside of the Historic District boundaries, the project attempts to emulate the historic character of the neighborhood similar to the development of single-family housing seen on 34th and 35th Street constructed ten years earlier. NRHA is also providing rehabilitation loans for historic properties within the Historic District to marrying the old and new creating a cohesive community.

The Park Place Historic District is an example of suburban development proliferated by the need for housing for the growing population and the implementation of streetcar service in the city of Norfolk.

Though some properties have been removed through redevelopment efforts, the areas within the Historic District boundaries reflect the character and vitality of the development plans. The district retains its original street pattern, and function as an industrial and residential area and gained significance during the 1884 to 1955 period with additional development within the original plan.

Bibliography:

Albrecht, Donald, ed. World War II and the American Dream: How Wartime Building Changed a Nation. Washington, DC: National Building Museum; Cambridge, MA: MIT Press, 1995.

Allgood, Don. *Large Poor Families Make Code Enforcement Difficult*. Ledger-Star: May 9, 1970.

Ames, David L. and McClelland, Linda Flint. "National Register Bulletin: Historic Residential Suburbs: Guidelines for Evaluation and Documentation for the National Register of Historic Places." Washington, DC: National Park Service, 2002.

"Apartments Become Condominiums." Norfolk, VA: Virginian-Pilot 10 June 1984.

Baker, John Milnes, A.I.A. American House Styles: A concise guide. New York: W. W. Norton and Company, Inc., 1994.

Bay Area Economics; Rhodeside, & Harwell, Incorporated; Rummel, Klepper & Kahl. *NRHA Park Place Neighborhood Revitalization Plan: November 12-16, 1999 Charrette Workbook.* 1999.

Bowman, Sam. Map of Norfolk. Norfolk, VA: 1900.

Coletta, Paolo E., ed. United States Navy and Marine Corps Bases, Domestic. Westport, CT: Greenwood Press, 1985.

Curtin, Theodore A., "A Marriage of Convenience: Norfolk and the Navy, 1917-1967," (Norfolk, VA: Old Dominion College), 1969.

Hill Directory Company. Norfolk, Portsmouth and Berkley, Virginia Directory. Norfolk, VA: Hill Directory Company.
Years: 1890-1923.

Hopkins, G. M. Atlas of the City of Norfolk, Virginia and Vicinity, including the City of Portsmouth. Philadelphia: 1889.

Howe, Jeffery, ed. The Houses We Live In: An identification guide to the History and Style of American

Domestic Architecture. San Diego, CA: Thunder Bay Press, 2002.

McAlester, Virginia and Lee McAlester. A Field Guide to American Houses. New York: Alfred A. Knopf, 1994.

Norfolk City Planning Commission. Norfolk and Vicinity; Western Section. Norfolk, VA: June 1945, revised 1957.

Norfolk (city) Deed Records. Norfolk, Virginia. (NDeedR)

Norfolk County Charter Books. Chesapeake, Virginia. (NCCB)

Norfolk County Death Records. Library of Virginia, Richmond, Virginia. (NCDR)

Norfolk County Deed Records. Chesapeake, Virginia. (NCDeedR)

Norfolk County: Its History and Development—the Leading County of Virginia. Norfolk, VA: Tidewater Publishing Company, 1907.

Norfolk Redevelopment and Housing Authority. *Conservation Plan: Park Place Conservation Project, Project 803, Norfolk, Virginia.* Norfolk, Virginia, 1973.

Norfolk Redevelopment and Housing Authority. *Conservation Plan: Park Place Conservation Project, As Amended on October 1985, Project 803, Norfolk, Virginia.* Norfolk, Virginia, 1985.

Norfolk Redevelopment and Housing Authority. *Amendment No. 4 to the Conservation Plan for the Park Place Conservation Project.* Norfolk, Virginia, October 1994.

Parramore, Thomas C., with Peter C. Stewart and Tommy L. Bogger. Norfolk: The First Four Centuries. Charlottesville: University of Virginia Press, 1994.

Prince, Richard W. Norfolk & Western Railway—Pocahontas coal carrier: precision transportation. Millard, Nebraska: R. E. Prince, 1980.

R. Christopher Goodwin and Associates, Inc. "Intensive Architectural Survey at Naval Base Norfolk, Virginia." Frederick, MD, 1998.

Reps, John W. The Making of Urban America: A History of City Planning in the United States. Princeton, NJ: Princeton University Press, 1965.

Sanborn Fire Insurance Company. Map of Portsmouth. Philadelphia: 1923, updated 1958.

Schlegel, Marvin W. Conscripted City: Norfolk in World War II. Norfolk, VA: The Virginian-Pilot and Ledger-Star, 1991.

Smeins, Linda E. Building an American Identity: Pattern Book Homes and Communities 1870-1900. Walnut Creek, CA: Altamira Press, 1999.

State Corporation Commission Records. Richmond, Virginia.

Station Development Board, Naval Base (Sewall Point Area), Norfolk, Virginia, "History and Development: Naval Facilities Sewall Point Area, 1917-1951," 1952.

Stewart, William H. History of Norfolk County, Virginia and Representative Citizens. Chicago, IL: Biographical Publishing Company, 1902.

Sykes and Gwalthmey. Map of Norfolk County. Collection of the Library of Virginia, Richmond, VA, 1887.

Traceries, Inc. "National Register of Historic Places Nomination: Lafayette Residence Park Historic District." Traceries, September 1998.

Tyler, Lyon G. Men of Mark In Virginia. Washington, DC: Men of Mark Publishing Company, 1908.

U.S. Bureau of the Census. U.S. Census, Norfolk (city), Virginia.
Year: 1900.

U.S. Bureau of the Census. U.S. Census, Norfolk County, Virginia.
Years: 1910, 1920, 1930.

Wells, John E. and Dalton, Robert E. The Virginia Architects: 1835-1955. Richmond, VA: New South Architectural Press, 1997.

Wertenbaker, Thomas J. Conscripted City: Norfolk in World War II. Norfolk, VA: The Virginian-Pilot and Ledger-Star, 1991.

Wertenbaker, Thomas J. Norfolk: Historic Southern Port. Durham, NC: Duke University Press, 1931.

Whichard, Rogers Dey. The History of Lower Tidewater Virginia, Vols. 1-3. New York, NY: Lewis Historical Publishing Company, Inc., 1959.

www.npl.lib.va.us/history/history50.html.

UTM Coordinates, continued:

E	18	385931	4081142
F	18	385941	4081076
G	18	385812	4080978
H	18	384521	4081468
I	18	383950	4081770

Verbal Boundary Description:

The boundaries of the Park Place Historic District are roughly 38th Street to the north; Granby Street, Monticello Avenue and Church Street to the east; the Norfolk Southern Railroad tracks south of East and West 23rd Street to the south; and Hampton Boulevard to the west. Areas eliminated from these rough boundaries include resources that would be considered non-contributing at the edges of the Historic District.

For precise boundaries, see the enclosed 1" = 200' map labeled "Park Place Historic District, Norfolk, Virginia, Boundary Map" enclosed with this submission.

Boundary Justification:

The boundaries reflect the historic significance of the area established in Section 8 of this submission as well as support the period of significance. In addition, the boundaries reflect the architectural character of the Historic District.

The boundaries of the Park Place Historic District reflect the concentration of four major developments: 1890, 1896, 1898, and 1902. These areas were initially referred to as Kensington, Park Place, Old Dominion Place, and Virginia Place. The current boundary reflects the largest concentration of contributing buildings, both residential and industrial, which remain in connection with this late-19th-century and early-20th century development. Boundary lines follow property lines as much as possible.

Endnotes:

[1] Ames, David L. and Linda Flint McClelland, "National Register Bulletin: Historic Residential Suburbs: Guidelines for Evaluation and Documentation for the National Register of Historic Places," (Washington, DC: National Park Service, 2002).
[2] Traceries, Inc., "National Register of Historic Places Nomination: Lafayette Residence Park Historic District," Traceries, September 1998.
[3] Ames, 28.
[4] Smeins, Linda E., "Building an American Identity: Pattern Book Homes and Communities 1870-1900," (Walnut Creek, CA: Altamira Press, 1999), 73.
[5] Ibid., 99.
[6] Ibid., 142-143
[7] Prince, Richard W., Norfolk & Western Railway—Pocahontas coal carrier: precision transportation, Millard, Nebraska: R. E. Prince, 1980, 261.
[8] Smeins, 65.
[9] Wertenbaker, Thomas J., "Norfolk: Historic Southern Port," (Durham, NC: Duke University Press), 1931), 304.
[10] Bowman, Sam, "Map of Norfolk," (Norfolk, VA: 1900) and Sanborn Fire Insurance Company, "Map of Portsmouth," (Philadelphia: 1923, updated 1958).
[11] Traceries.
[12] www.npl.lib.va.us/history/history50.html.
[13] Bowman.
[14] Reps, John W., "The Making of Urban America: A History of City Planning in the United States," (Princeton, NJ: Princeton University Press, 1965), 136-139.
[15] Norfolk County Deed Book 163, page 474, 12 November 1890.
[16] Norfolk County Deed Book 157, page 156, 17 May 1890.
[17] Norfolk County Deed Book 227, page 206, 8 July 1899.
[18] Stewart, William H., "History of Norfolk County, Virginia and Representative Citizens," (Chicago, IL: Biographical Publishing Company, 1902), 639.
[19] Norfolk County Deed Book 201, page 31, 22 June 1896.
[20] Stewart, 718.
[21] The building permits are housed in the Sargeant Memorial Room of the Kirn Memorial Library of the Norfolk Public Library system. The building permits are dated from August 1902 to January 1907. No other building permits remain from the 19th or 20th century that could be accessed.

[22] Hill Directory Company, "Norfolk, Portsmouth and Berkley, Virginia Directory," (Norfolk, VA: Hill Directory Company), 1903, 384.
[23] Hill Directory Company, 1903, 395.
[24] Hill Directory Company, 1903, 226.
[25] Hill Directory Company, 1903, 437.
[26] Baker, John Milnes, A.I.A., "American House Styles: A concise guide," (New York: W. W. Norton and Company, Inc., 1994), 120.
[27] Ibid., 117 and 122.
[28] Smeins, 259.
[29] Baker, 88.
[30] Ibid., 114.
[31] Smeins, 285.
[32] Baker, 146-149.
[33] Bowman and Sanborn Fire Insurance Company.
[34] Parramore, Thomas C., with Peter C. Stewart and Tommy L. Bogger, "Norfolk: The First Four Centuries," (Charlottesville: University of Virginia Press), 1994, 275.
[35] Coletta, Paolo E., ed., "United States Navy and Marine Corps Bases, Domestic," (Westport, CT: Greenwood Pres), 1985, 379.
[36] Ibid., 380.
[37] Curtin, Theodore A., "A Marriage of Convenience: Norfolk and the Navy, 1917-1967," (Norfolk, VA: Old Dominion College), 1969, 33.
[38] Station Development Board, Naval Base (Sewall Point Area), Norfolk, Virginia, "History and Development: Naval Facilities Sewall Point Area, 1917-1951," 1952, 5.
[39] R. Christopher Goodwin and Associates, Inc., "Intensive Architectural Survey at Naval Base Norfolk, Virginia." (Frederick, MD), 1998, 37.
[40] Wertenbaker, Thomas J., "Conscripted City: Norfolk in World War II," (Norfolk, VA: The Virginian-Pilot and Ledger-Star), 1991), 58-60.
[41] Albrecht, Donald, ed., "World War II and the American Dream: How Wartime Building Changed a Nation," (Washington, DC: National Building Museum; Cambridge, MA: MIT Press), 1995, xx.
[42] Parramore, 351.
[43] Ibid., 352.
[44] Wertenbaker., "Conscripted City: Norfolk in World War II," 371.
[45] Parramore, 352.
[46] Ibid., 366-367.
[47] Ibid., 381.

[48] Norfolk Redevelopment and Housing Authority, *Conservation Plan: Park Place Conservation Project, Project 803, Norfolk, Virginia,* (Norfolk, Virginia, 1973), 3.
[49] Allgood, Don. *Large Poor Families Make Code Enforcement Difficult*. Ledger-Star: May 9, 1970.
[50] Norfolk Redevelopment and Housing Authority, *Conservation Plan: Park Place Conservation Project, Project 803, Norfolk, Virginia,* 1.
[51] Ibid., 3.
[52] Norfolk Redevelopment and Housing Authority. *Conservation Plan: Park Place Conservation Project, As Amended on October 1985, Project 803, Norfolk, Virginia.* Norfolk, Virginia, 1985, 5.
[53] "Apartments Become Condominiums." Norfolk, VA: Virginian-Pilot 10 June 1984.
[54] Norfolk Redevelopment and Housing Authority. *Amendment No. 4 to the Conservation Plan for the Park Place Conservation Project.* Norfolk, Virginia, October 1994, 14.

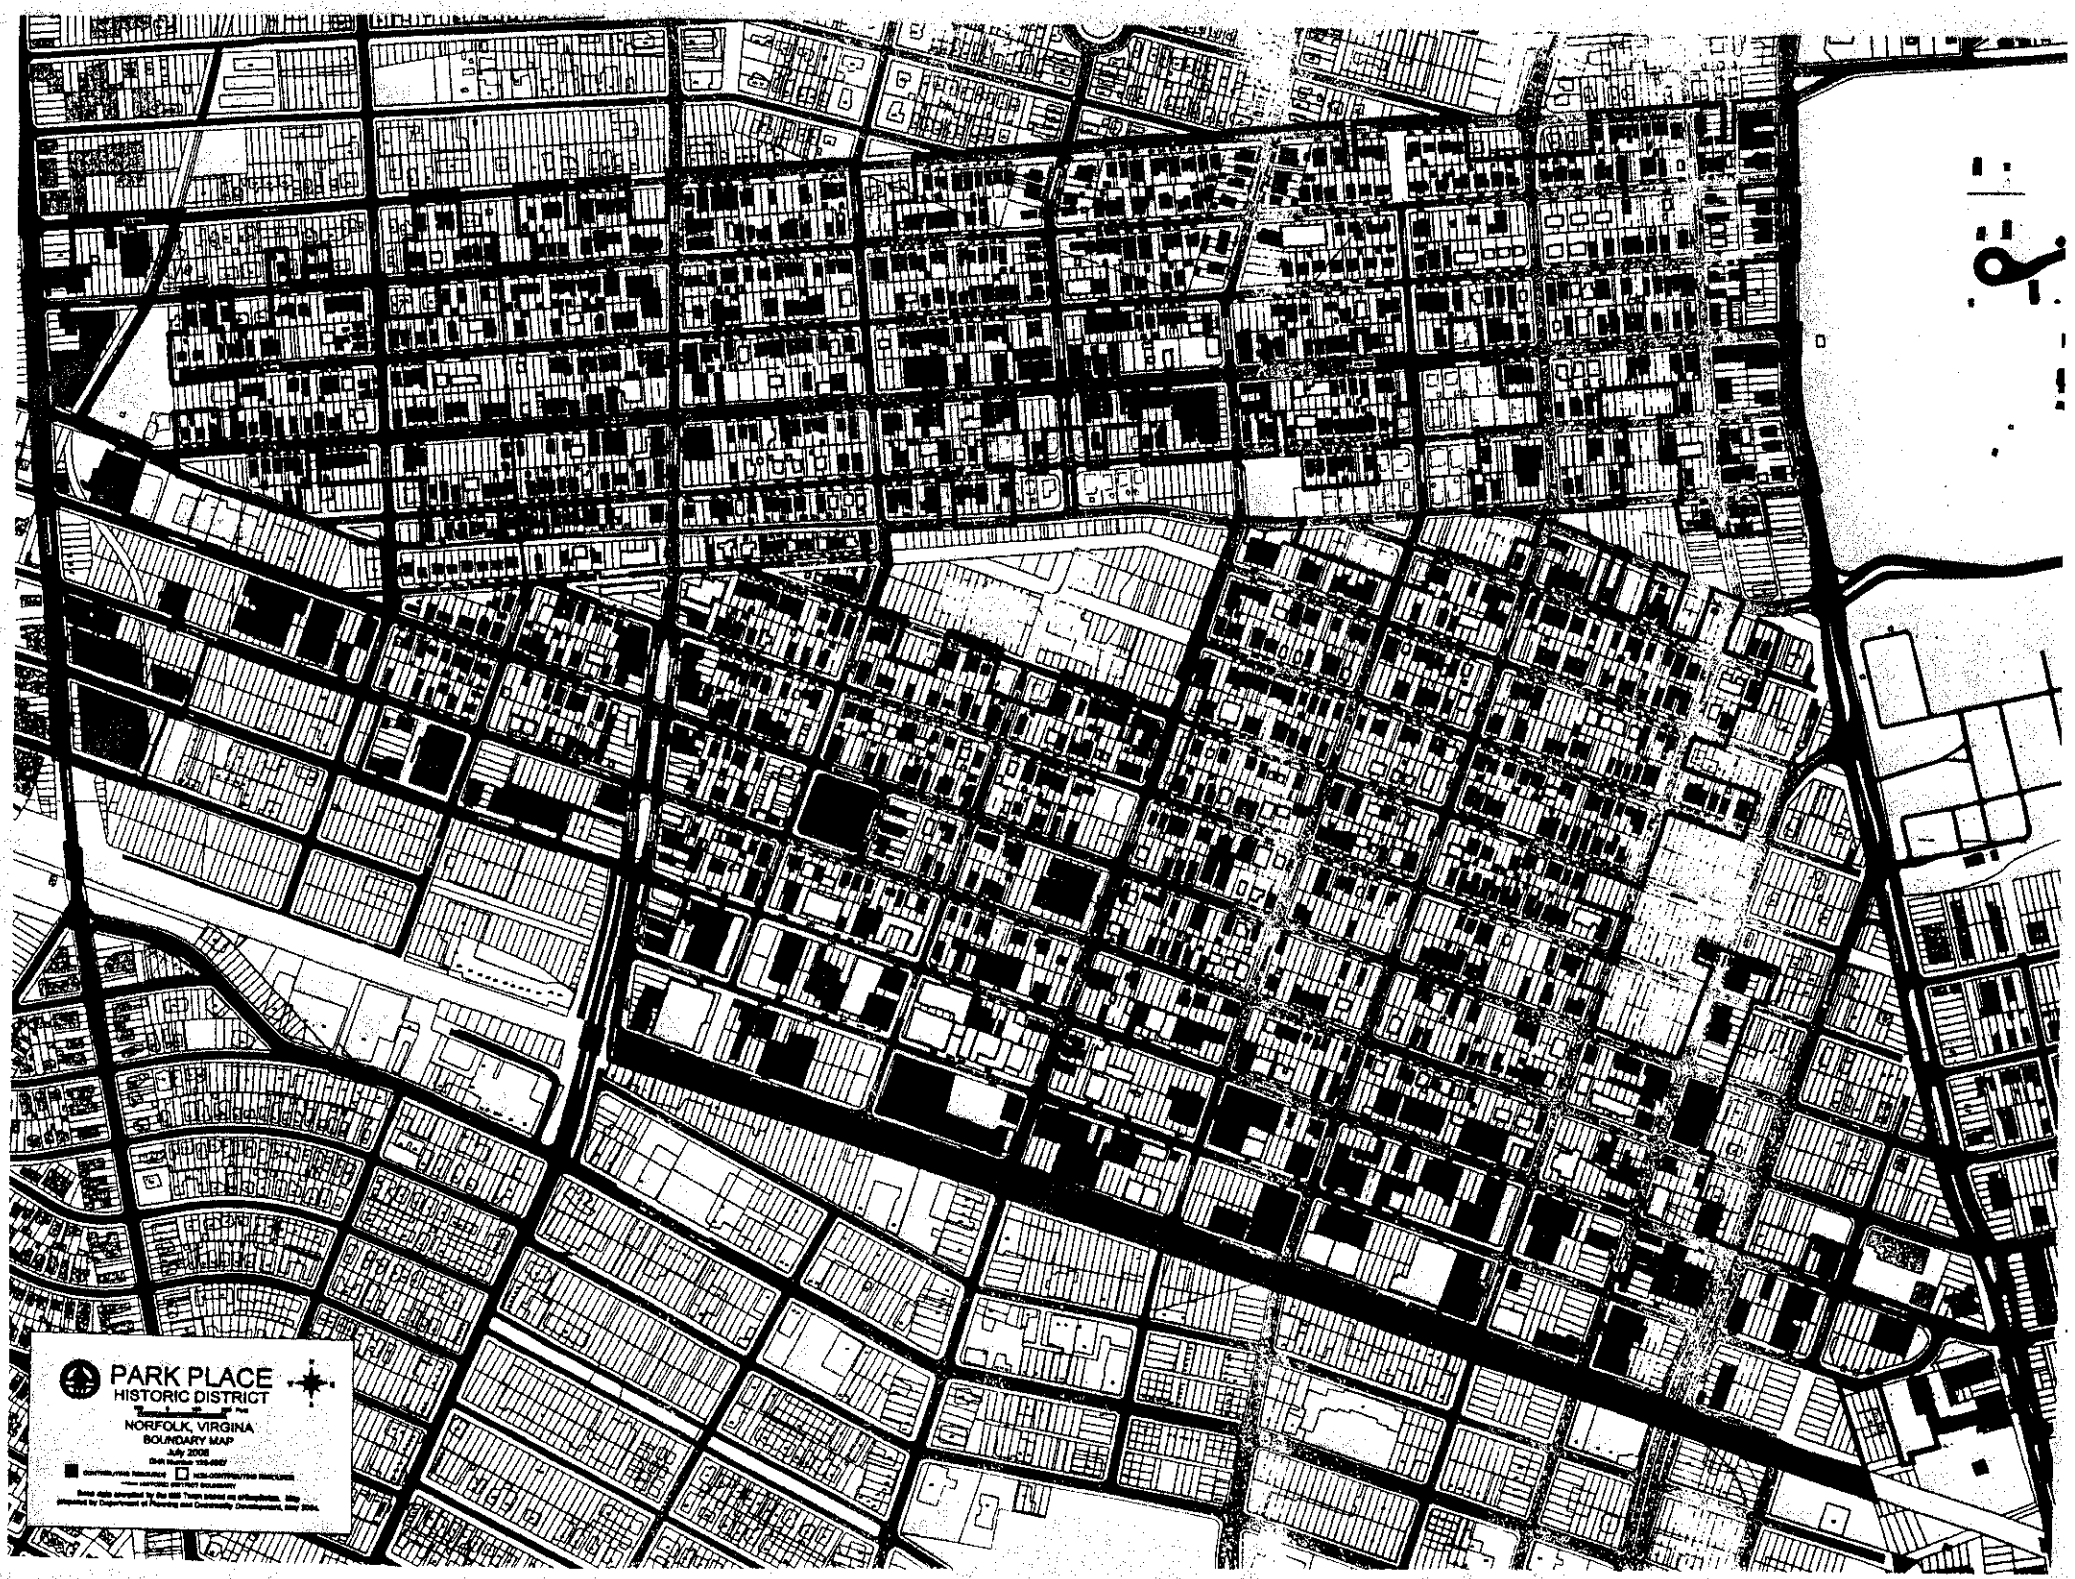
PARK PLACE
HISTORIC DISTRICT
NORFOLK, VIRGINIA
BOUNDARY MAP
July 2008

NORFOLK SOUTH QUADRANGLE
VIRGINIA
7.5-MINUTE SERIES (TOPOGRAPHIC)

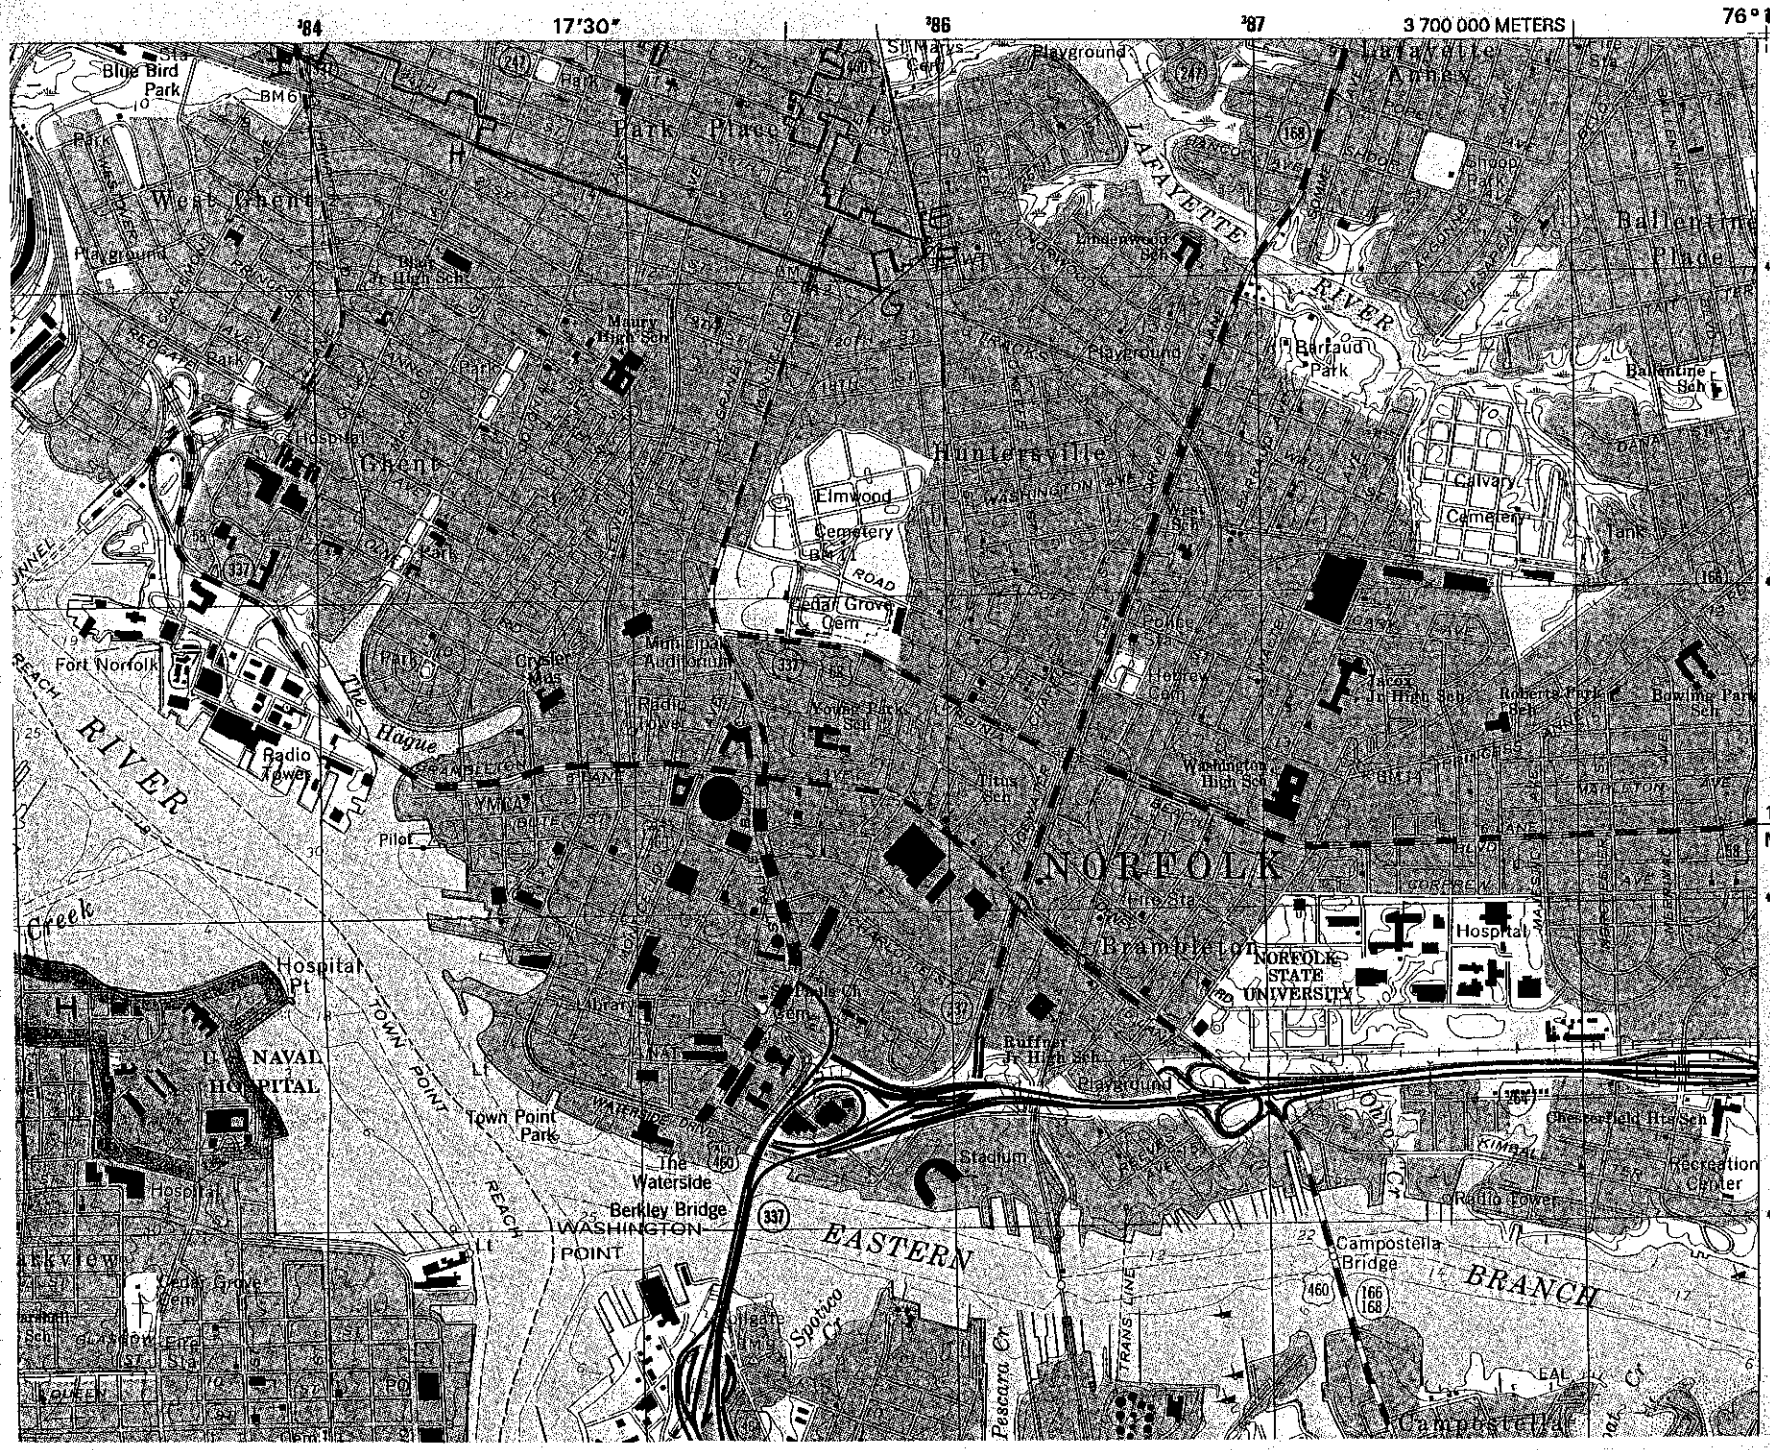
17'30"
3 700 000 METERS
76°15'
36°52'30"
Blue Bird Park
Park Place
West Ghent
Ghent
Hospital
Fort Norfolk
Radio Tower
YMCA
Pilot
Hospital Pt
NAVAL HOSPITAL
Town Point Park
The Waterside
Berkley Bridge
WASHINGTON POINT
Cedar Grove Cem
Elmwood Cemetery
Cedar Grove Cem
Crystal Mas
Municipal Auditorium
Radio Tower
Kaufer Park Sch
Huntersville
Maury High Sch
Barraud Park
Playground
Lafayette Annex
Ballentine Place
Ballentine Sch
Calvary Cemetery
Tank
Hebrew Cem
Roberts Park Sch
Bowling Park Sch
Washington High Sch
Titus Sch
NORFOLK
Bramleton
NORFOLK STATE UNIVERSITY
Hospital
Buffner Jr High Sch
Stadium
Chesterfield Hts Sch
Recreation Center
Radio Tower
Campostella Bridge
Campostella
LAFAYETTE RIVER
EASTERN BRANCH
The Hague
TOWN POINT REACH
Pescara Cr
Sporco Cr
Lafayette River
Creek
Parkview
Lower Ghent
Blow Fire Sta
PO
Sta
Park
Playground
Hospital
Library
Cem
Sch
Jr High Sch
Hospital
Radio Tower
Stadium
Campostella
Bridge
Recreation
Center
Chesterfield Hts Sch
Bowling Park Sch
Roberts Park Sch
Hebrew Cem
Calvary
Cemetery
Tank
Ballentine Sch
Barraud
Park
Lafayette
Annex
St Marys
Playground
Elmwood
Cemetery
Cedar Grove
Cem
Municipal
Auditorium
Crystal
Mas
Radio
Tower
Kaufer Park
Sch
Maury
High Sch
Titus
Sch
Washington
High Sch
Buffner
Jr High Sch
Playground
Stadium
Hospital
NORFOLK
STATE
UNIVERSITY
Bramleton
Campostella
Bridge
Campostella
Recreation
Center
Radio Tower
Chesterfield Hts Sch
Hospital
Pilot
Radio
Tower
Fort Norfolk
Hospital
Pt
NAVAL
HOSPITAL
Town Point
Park
The
Waterside
Berkley Bridge
WASHINGTON
POINT
Cedar Grove
Cem
Blow Fire